


Guía para agregar en AX HYBRID PRO los canales de una DVR y hacer que se disparen por movimiento


En la DVR, configuramos la cámara (en este caso utilizamos el canal 1) desactivando la detección de movimiento en todos los canales, luego se activa el área de intrusión y se dibuja el área según la especificación



Quedando de la siguiente manera (imagen obtenida del IVMS)

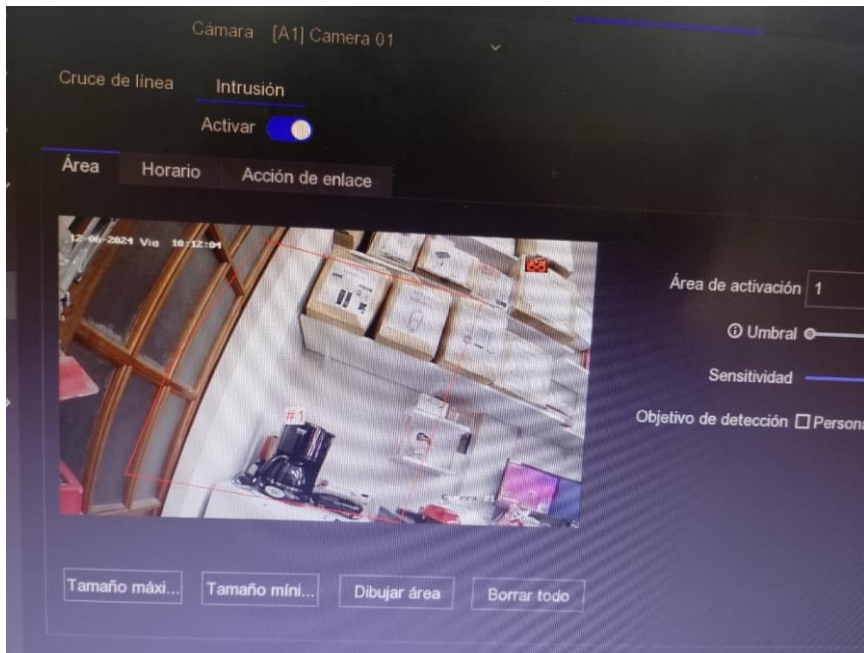

Una vez finalizada la configuración en la DVR, vamos a la configuración del panel, ingresamos como el instalador y vamos a agregar la cámara

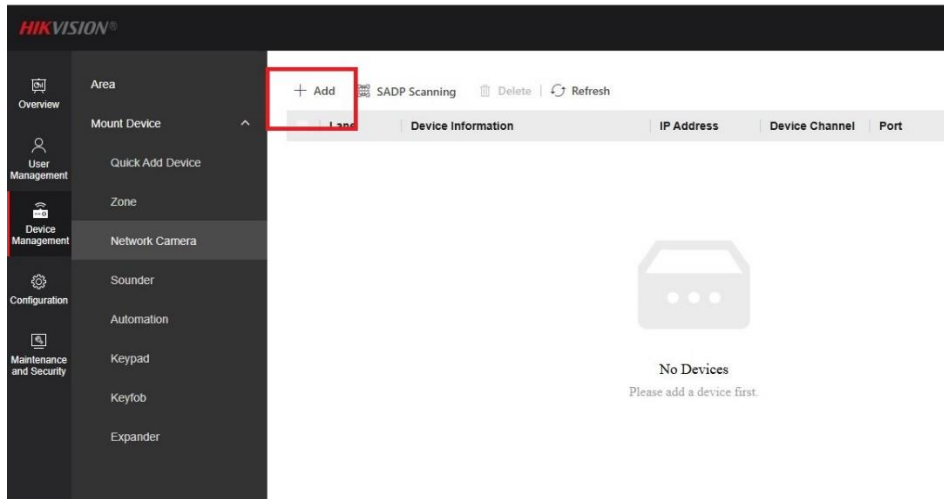


Ingresamos la dirección ip de la cámara y las credenciales

The image shows the 'Add Network Camera' configuration form. At the top, there is a back arrow and the title 'Add Network Camera'. Below the title are two tabs: 'Link Camera' (highlighted in red) and 'Channel'. The form contains several input fields: '\*IP Address' with the value '172.30.20.114', 'Protocol Type' with radio buttons for 'HIKVISION' (selected) and 'ONVIF', '\*Port' with the value '8000', '\*User Name' with the value 'admin', and '\*Password' with a masked field and an eye icon. At the bottom, there are 'Next' and 'Cancel' buttons.


Y seleccionamos el canal (dependiendo el modelo permite hasta 2 o hasta 4 cámaras), en este caso usamos el canal 1

The image shows the 'Add Network Camera' form with the 'Channel' tab selected. The 'Link Camera' tab is also visible. Below the tabs, there is a 'Channel' label followed by a grid of buttons labeled D01 through D18. The D01 button is highlighted with a red checkmark. At the bottom, there are 'Save' and 'Cancel' buttons.


Utilizando la aplicación Hikconnect verificaremos el funcionamiento de la alarma

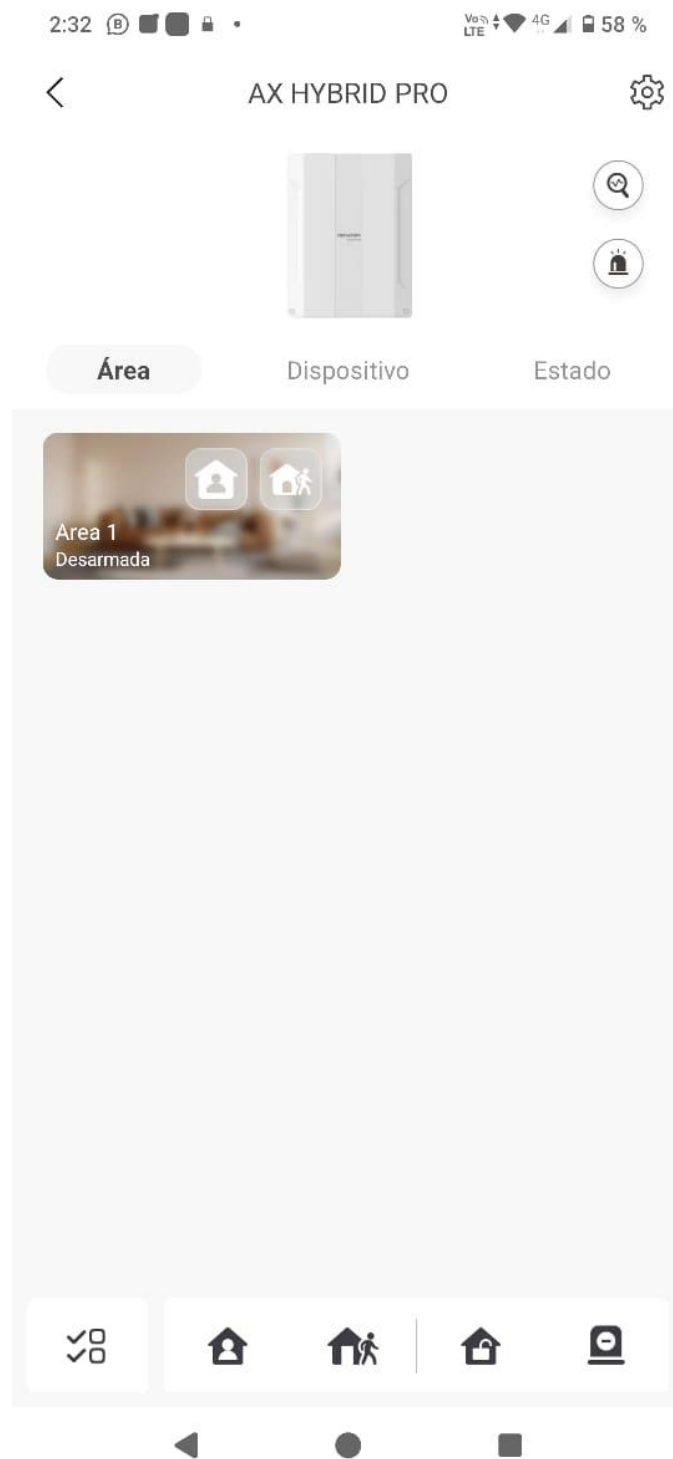


Armamos el área apretando el botón

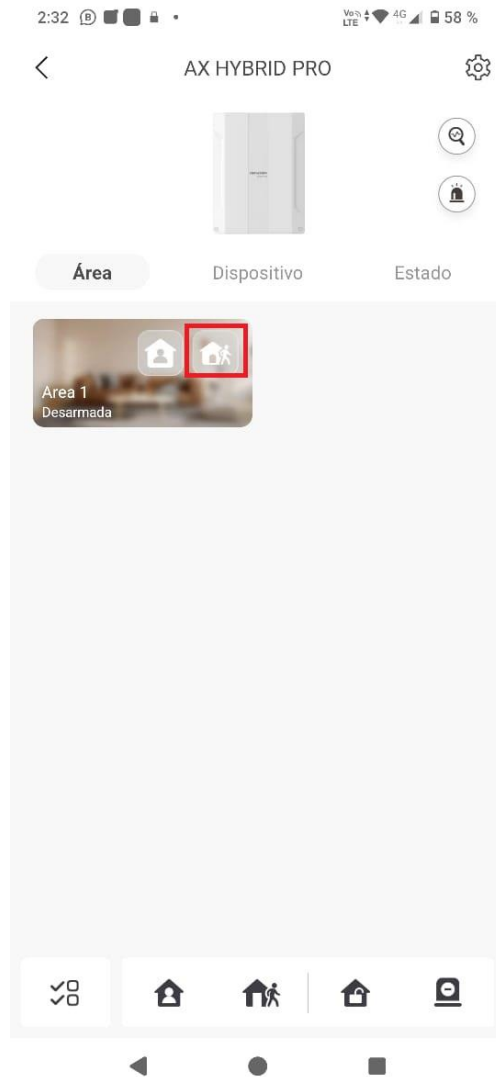


Quedando de la siguiente manera

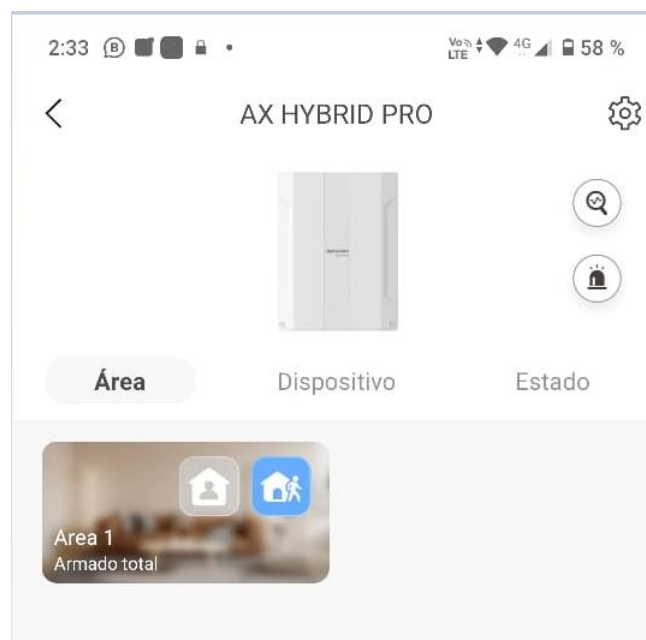

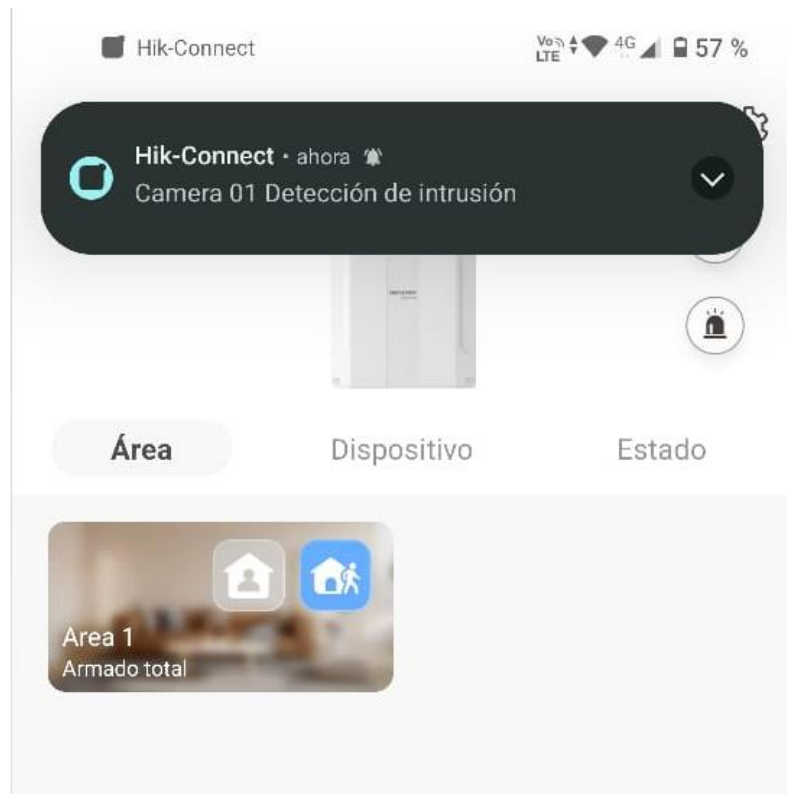

Al revisar los eventos verificamos la alarma

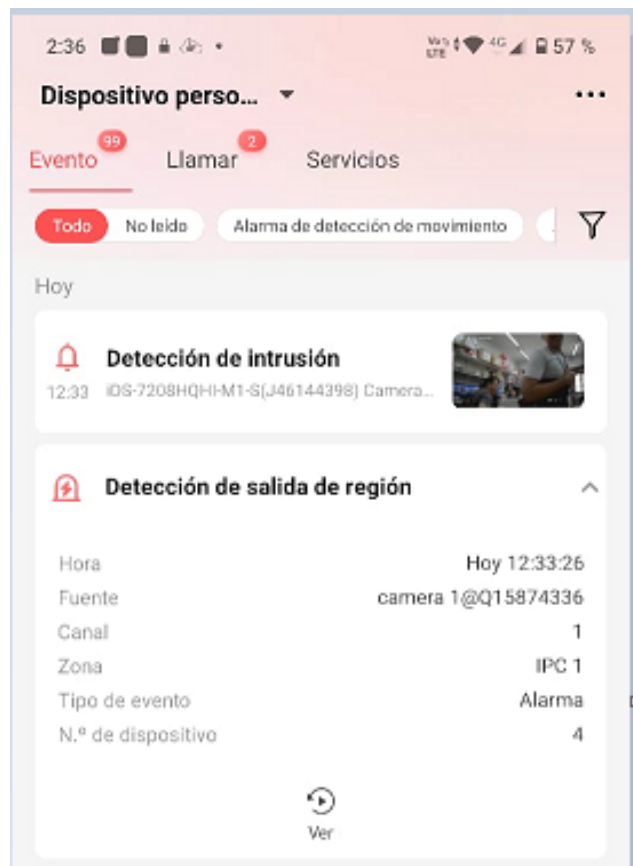

Las pruebas se realizaron con los siguientes equipos:

Modelo de dispositivo

Nº serie

Versión de firmware

**Basic Information**    Time Settings

---

\* Device Name

Model DS-PHA48-EP

Serial No. DS-PHA48-EP20220825AAWRQ15874336WU

Device Version V1.0.5 build 240111

Web Version V5.1.4\_R0501 build 240111

Maximum Number of Areas 16

Maximum Number of Zones 48