



# H0T Series Bullet & Dome Camera

## User Manual

### User Manual

Thank you for purchasing our product. If there are any questions, or requests, do not hesitate to contact the dealer.

This manual applies to models below:

| Type               | Model                 |
|--------------------|-----------------------|
| Type I<br>Camera   | DS-2CE78H0T-IT1/3F(C) |
| Type II<br>Camera  | DS-2CE76H0T-ITPF(C)   |
| Type III<br>Camera | DS-2CE76H0T-ITMF(C)   |

This manual may contain several technical mistakes or printing errors, and the content is subject to change without notice. The updates will be added to the new version of this manual. We will readily improve or update the products or procedures described in the manual.

0100001090626

## Regulatory Information

### FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**FCC compliance:** This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

### FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

### EU Conformity Statement



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the Low Voltage Directive 2014/35/EU, the EMC Directive 2014/30/EU.



2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: [www.recyclethis.info](http://www.recyclethis.info).



2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information, see: [www.recyclethis.info](http://www.recyclethis.info).

### Industry Canada ICES-003 Compliance

This device meets the CAN ICES-3 (A)/NMB-3(A) standards requirements.

### Warning

This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

## Safety Instruction

These instructions are intended to ensure that user can use the product correctly to avoid danger or property loss.

The precaution measure is divided into “Warnings” and “Cautions”.

**Warnings:** Serious injury or death may occur if any of the warnings are neglected.

**Cautions:** Injury or equipment damage may occur if any of the cautions are neglected.

|   |  |
|---|--|
|  |         |
| <b>Warnings</b> Follow these safeguards to prevent serious injury or death.       | <b>Cautions</b> Follow these precautions to prevent potential injury or material damage. |



### Warnings

- In the use of the device, you must be in strict compliance with the electrical safety regulations of the nation and region.
- Input voltage should meet both the SELV (Safety Extra Low Voltage) and the Limited Power Source with 12 VDC according to the IEC60950-1 standard. Refer to technical specifications for detailed information.
- Do not connect multiple devices to one power adapter to avoid over-heating or a fire hazard caused by overload.
- Make sure that the plug is firmly connected to the power socket.
- Make sure that the device is firmly fixed if wall mounting or ceiling mounting is adopted.
- If smoke, odor or noise rise from the device, turn off the power at once and unplug the power cord, and then contact the service center.
- Never attempt to disassemble the camera by unprofessional personal.



### Cautions

- Do not drop the camera or subject it to physical shock.
- Do not touch sensor modules with fingers.
- Do not place the camera in extremely hot, cold (the operating temperature shall be  $-40^{\circ}\text{C}$  to  $60^{\circ}\text{C}$ ), dusty or damp locations, and do not expose it to high electromagnetic radiation.
- If cleaning is necessary, use clean cloth with a bit of ethanol and wipe it gently.
- Do not aim the camera at the sun or extra bright places.
- The sensor may be burned out by a laser beam, so when any laser equipment is in using, make sure that the surface of sensor will not be exposed to the laser beam.
- Do not expose the device to high electromagnetic radiation or extremely hot, cold, dusty or damp environment.
- To avoid heat accumulation, good ventilation is required for the operating environment.

- Keep the camera away from liquid while in use for non-water-proof device.
- While in delivery, the camera shall be packed in its original packing, or packing of the same texture.

## Mark Description

Table 0-1 Mark Description

| Mark | Description |
|------|-------------|
| ---  | DC Voltage  |

# 1 Introduction

## 1.1 Product Features

The main features are as follows:

- High performance CMOS sensor
- OSD menu with configurable parameters
- Smart IR
- 3-Axis Adjustment

## 1.2 Overview

### 1.2.1 Overview of Type I Camera

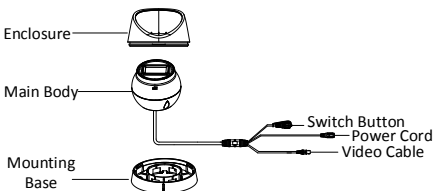


Figure 1-1 Overview of Type I Camera

**Note:**

Press and hold the switch button for 5 seconds to switch the video output. Four kinds of video outputs are available: TVI, AHD, CVI, and CVBS.

### 1.2.2 Overview of Type II Camera

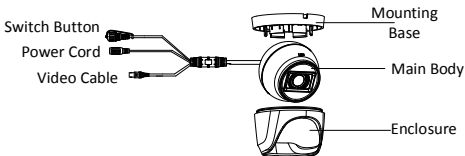


Figure 1-2 Overview of Type II Camera

**Note:**

Press and hold the switch button for 5 seconds to switch the video output. Four kinds of video outputs are available: TVI, AHD, CVI, and CVBS.

### 1.2.3 Overview of Type III Camera

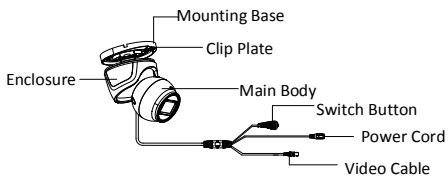


Figure 1-3 Overview of Type III Camera

**Note:**

Press and hold the switch button for 5 seconds to switch the video output. Four kinds of video outputs are available: TVI, AHD, CVI, and CVBS.

## 2 Installation

---

### **Before you start:**

- Make sure that the device in the package is in good condition and all the assembly parts are included.
- Make sure that all the related equipment is power-off during the installation.
- Check the specification of the products for the installation environment.
- Check whether the power supply is matched with your power output to avoid the damage.
- Make sure the wall is strong enough to withstand three times the weight of the camera and the mount.
- If the wall is cement, insert expansion bolts before installing the camera. If the wall is wooden, use self-tapping screws to secure the camera.
- If the product does not function properly, contact your dealer or the nearest service center. Do NOT disassemble the camera for repair or maintenance by yourself.

### 2.1 Installation of Type I Camera

#### 2.1.1 Ceiling/Wall Mounting without Junction Box

##### **Before you start:**

The ceiling mounting and wall mounting are similar. Following takes ceiling mounting as an example.

##### **Steps:**

1. Disassemble the camera by rotating the camera to align the notch to one of the line, as shown in the figure below.




Figure 2-1 Disassemble the Camera

2. Pry the mounting base by using a flat object, for example, a coin.




Figure 2-2 Pry the Mounting Base

3. Paste the drill template (supplied) to the place where you want to install the camera.
4. Drill the screw holes, and the cable hole (optional) on ceiling according to the drill template.




Figure 2-3 The Drill Template

- Attach the mounting base to the ceiling and secure it with supplied screws. For cement ceiling, you need to mount the expansion bolts at first.

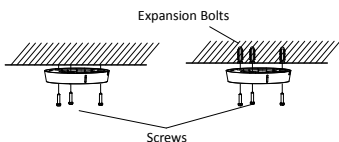


Figure 2-4 Attach the Mounting Base to the Ceiling

- Route cables through the cable hole or the side opening.
- Install the camera back to the mounting base and secure it.

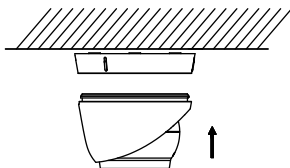


Figure 2-5 Install the Camera Back

- Connect the corresponding power cord, and video cable.
- Power on the camera to check whether the image on the monitor is gotten from the optimum angle. If not, adjust the camera according to the figure below.

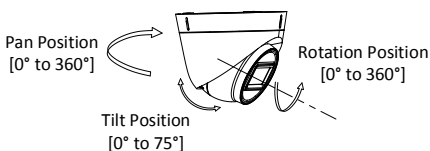


Figure 2-6 3-Axis Adjustment

### 2.1.2 Ceiling/Wall Mounting with Junction Box

#### **Before you start:**

You need to purchase a junction box in advance.

#### **Steps:**

- Paste the drill template on the place where you want to install the camera.
- Drill screw holes and the cable hole (optional) according to the drill template.




Figure 2-7 The Drill Template

- Take apart the junction box, and align the screw holes of the mounting base with those on the junction box's cover.

4. Install the mounting base on the junction box's cover with three PM4 screws.
5. Secure the junction box's body on the wall with three PA4 × 25 screws.

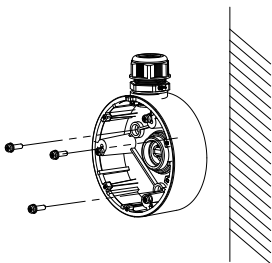


Figure 2-8 Secure the Junction Box

6. Route the cables through the bottom cable hole, or the side cable hole of the junction box.
7. Combine the junction box's cover with its body.
8. Repeat step 7 to 9 of 2.1.1 *Ceiling/Wall Mounting without Junction Box* to finish the installation.

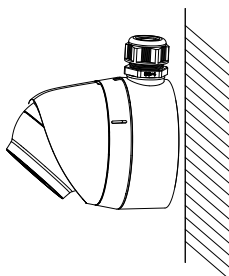


Figure 2-9 Finish the Installation

## 2.2 Installation of Type II Camera

### 2.2.1 Ceiling/Wall Mounting without Junction Box

#### **Before you start:**

The ceiling mounting and the wall mounting are similar. Following takes ceiling mounting as an example.

#### **Steps:**

1. Pry the mounting base by using a flat object, for example, a coin.




Figure 2-10 Pry the Mounting Base

2. Paste the drill template (supplied) to the place where you want to install the camera.
3. Drill the screw holes according to the drill template, and the cable hole (optional) on the ceiling.






Figure 2-11 Drill Template

**Note:**

Drill the cable hole in the center of the drill template, when adopting ceiling outlet to route the cable.

4. Attach the mounting base to the ceiling and secure it with supplied screws. For cement ceiling, you need to mount the expansion bolts at first.




Figure 2-12 Attach the Mounting Base

5. Route cables through the cable hole or the side opening.
6. Install the camera back to the mounting base and secure it.

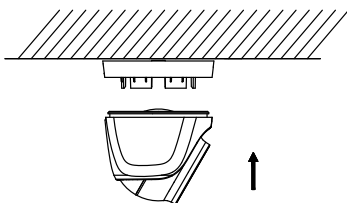


Figure 2-13 Install the Camera Back

7. Connect the corresponding power cord, and video cable.
8. Power on the camera to check whether the image on the monitor is gotten from the optimum angle. If not, adjust the camera according to the figure below.

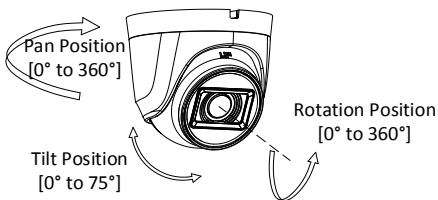


Figure 2-14 3-Axis Adjustment

### 2.2.2 Ceiling/Wall Mounting with Junction Box

**Before you start:**

You need to purchase a junction box in advance.

1. Paste the drill template on the place where you want to install the camera.
2. Drill screw holes and the cable hole according to the drill template.




Figure 2-15 The Drill Template

3. Take apart the junction box, and align the screw holes of the mounting base with those on the Junction box's cover.
4. Install the mounting base on the junction box's cover with screws.




Figure 2-16 Install the Mounting Base

5. Secure the junction box's body on the ceiling with four PA4 × 25 screws and expansion bolts.

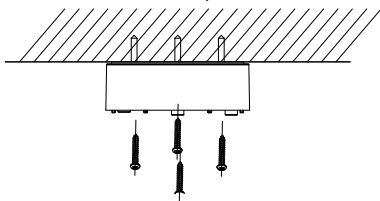


Figure 2-17 Secure the Junction Box's Body

6. Route the cables through the bottom cable hole, or the side cable hole of the junction box.
7. Combine the junction box cover with its body.

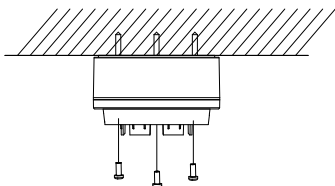


Figure 2-18 Combine the Junction Box

8. Repeat the step 6 to 8 of 2.2.1 *Ceiling/Wall Mounting without Junction Box* to finish the installation.

## 2.3 Installation of Type III Camera

### 2.3.1 Ceiling/Wall Mounting without Junction Box

#### **Before you start:**

The ceiling mounting and the wall mounting are similar. Following takes ceiling mounting as an example. Ceiling/Wall Mounting with Junction Box refers to 2.2.2 *Ceiling/Wall Mounting with Junction Box*.

**Steps:**

1. Disassemble the turret camera by loosening the screw.
2. Remove the mounting base from the main body.




Figure 2-19 Remove the Mounting Base

3. Drill the screw holes and the cable hole (optional) on the ceiling.
4. Secure the mounting base on the ceiling with supplied screws.

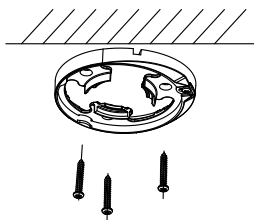


Figure 2-20 Secure the Mounting Base to the Ceiling

5. Route the cables through the cable hole, or the side opening.
6. Secure the camera on the mounting base.
  - 1) Pull out the clip plate, and then to combine the camera with the mounting base.
  - 2) Push the clip plate in, and secure the camera by tightening the screw.




Figure 2-21 Secure the Camera

7. Connect the corresponding cables, such as power cord, and video cable.
8. Power on the camera to check whether the image on the monitor is gotten from the optimum angle. If not, adjust the camera according to the figure below.

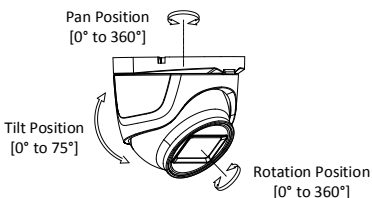


Figure 2-22 3-Axis Adjustment

## 3 Menu Description

Please follow the steps below to call the menu.

**Note:**

The actual display may vary with your camera model.

**Steps:**

1. Connect the camera with the TVI DVR, and the monitor, shown as the figure 3-1.

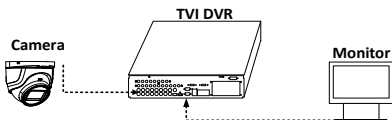



Figure 3-1 Connection

2. Power on the analog camera, TVI DVR, and the monitor to view the image on the monitor.
3. Click PTZ Control to enter the PTZ Control interface.
4. Call the camera menu by clicking  button, or call preset No. 95.

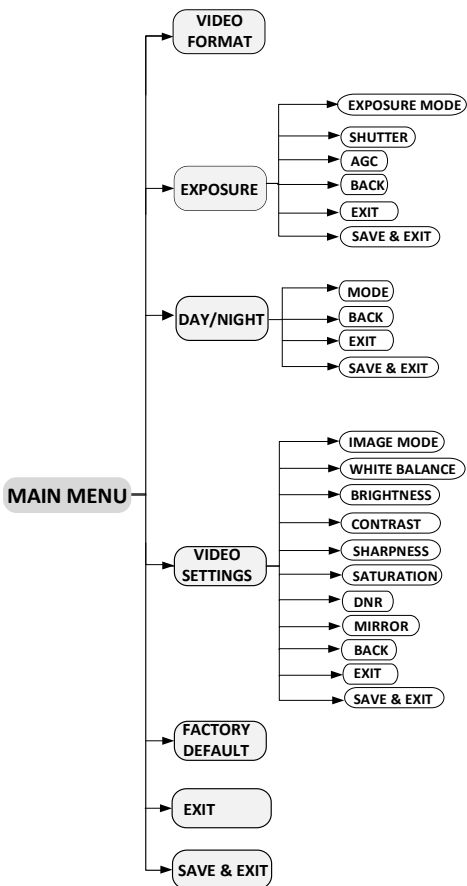


Figure 3-2 Main Menu Overview

5. Click the direction arrow to control the camera.
  - 1). Click up/down direction button to select the item.

- 2). Click Iris + to confirm the selection.
- 3). Click left/right direction button to adjust the value of the selected item.

### 3.2 VIDEO FORMAT

You can set the video format to 5MP@20fps, 4MP@30fps, 4MP@25fps, 2MP@30fps, or 2MP@25fps.

### 3.3 EXPOSURE

Exposure describes the brightness-related parameters, which can be adjusted by **EXPOSURE MODE**, **SHUTTER** and **AGC**.

| EXPOSURE      |          |
|---------------|----------|
| EXPOSURE MODE | ◀GLOBAL▶ |
| SHUTTER       | ◀AUTO▶   |
| AGC           | LOW      |
| BACK          | ←        |
| EXIT          | ←        |
| SAVE & EXIT   | ←        |

Figure 3-3 EXPOSURE

#### EXPOSURE MODE

You can set the **EXPOSURE MODE** to **GLOBAL**, **BLC**, **HLC**, or **DWDR**.

- **GLOBAL**

**GLOBAL** refers to the normal exposure mode which performs exposure according to the whole image brightness.

- **BLC (Backlight Compensation)**

**BLC** (Backlight Compensation) compensates light for the front object to make it clear, but this may cause the over-exposure of the background, where the light is strong.

- **HLC (Highlight Compensation)**

**HLC** stands for highlight compensation. The camera detects the strong spots (the over-exposure portion of image), then reduce the brightness of the strong spots to improve the overall images.

- **DWDR (Digital Wide Dynamic Range)**

The **DWDR** helps the camera provide clear images even under backlight circumstances. When both very bright and very dark areas simultaneously exist in the image, **DWDR** balances the brightness level of the whole image to provide clear images with details.

#### SHUTTER

**SHUTTER** is a photographic device that administers the exposure by limiting the time over which light is admitted.

#### AGC (Automatic Gain Control)

It optimizes the clarity of the image in poor light conditions. The **AGC** level can be set to **HIGH**, **MEDIUM**, or **LOW**.

**Note:**

The noise will be amplified, when setting the AGC level.

### 3.4 DAY/NIGHT

**COLOR**, **BW** (Black and White), and **AUTO** are selectable for DAY/NIGHT switch.

#### COLOR

The image is colorful in day mode all the time.

## B&W (Black and White)

The image is black and white all the time, and the **IR LIGHT** turns on in the poor light conditions. You can turn on/off the **IR LIGHT** and set the value of **SMART IR** in this menu.

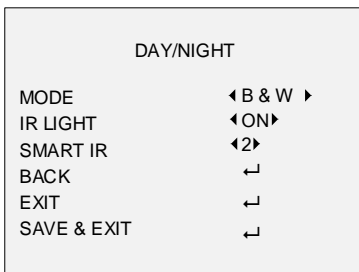


Figure 3-4 B&W

- **IR LIGHT**

You can turn on/off the **IR LIGHT** to meet the requirements of different circumstances.

- **SMART IR**

The **Smart IR** function is used to adjust the light to its most suitable intensity, and prevent the image from over exposure. The **SMART IR** value can be adjusted from 1 to 3. The higher the value, the more obvious effects.

## AUTO

Automatically switch to Color or B&W (Black and White) according to the actual scene brightness.

You can turn on/off the **IR LIGHT**, and set the value of **SMART IR** in this menu.




Figure 3-5 AUTO

- **IR LIGHT**

You can turn on/off the **IR LIGHT** to meet the requirements of different circumstances.

- **SMART IR**

The **Smart IR** function is used to adjust the light to its most suitable intensity, and prevent the image from over exposure. The **SMART IR** value can be adjusted from 1 to 3. The higher the value, the more obvious effects.

- **D → N Threshold (Day to Night Threshold)**

**Day to Night Threshold** is used to control the sensitivity of switching the day mode to the night mode. You can set the value from 1 to 9. The larger the value, the more sensitive the camera.

- **N → D Threshold (Night to Day Threshold)**

**Night to Day Threshold** is used to control the sensitivity of switching the night mode to the day mode. You can

set the value from 1 to 9. The larger the value, the more sensitive the camera.

### 3.5 VIDEO SETTINGS

Move the cursor to **VIDEO SETTINGS** and click **Iris+** to enter the submenu. **IMAGE MODE**, **WHITE BALANCE**, **BRIGHTNESS**, **CONTRAST**, **SHARPNESS**, **SARUTATION**, **DNR**, and **MIRROR** are adjustable.

| VIDEO SETTINGS |     |
|----------------|-----|
| IMAGE MODE     | STD |
| WHITE BALANCE  | ◀↔▶ |
| BRIGHTNESS     | ◀5▶ |
| CONTRAST       | ◀5▶ |
| SHARPNESS      | ◀5▶ |
| SATURATION     | ◀5▶ |
| DNR            | ◀5▶ |
| MIRROR         | OFF |
| BACK           | ↵   |
| EXIT           | ↵   |
| SAVE & EXIT    | ↵   |

Figure 3-6 VIDEO SETTINGS

#### IMAGE MODE

**IMAGE MODE** is used to adjust the image saturation. You can set it to **STD** (Standard), or **HIGH-SAT** (High Saturation).

#### WHITE BALANCE

White balance, the white rendition function of the camera, is to adjust the color temperature according to the environment. It can remove unrealistic color casts in the image. You can set the mode to **AUTO**, or **MANUAL**.

- **AUTO**

Under **AUTO** mode, white balance is being adjusted automatically according to the color temperature of the scene illumination.

- **MANUAL**

You can set the **R GAIN/B GAIN** value from 1 to 255 to adjust the shades of red/blue color of the image.

| WHITE BALANCE |          |
|---------------|----------|
| MODE          | ◀MANUAL▶ |
| R-GAIN        | ◀5▶      |
| B-GAIN        | ◀5▶      |
| BACK          | ↵        |
| EXIT          | ↵        |
| SAVE & EXIT   | ↵        |

Figure 3-7 MANUAL MODE

#### BRIGHTNESS

Brightness refers to the brightness of the image. You can set the brightness value to darken or brighten the image. The higher the value is, the brighter the image is.

#### CONTRAST

This feature enhances the difference in color and light between parts of an image.

#### SHARPNESS

Sharpness determines the amount of detail an imaging system can reproduce.

## **SATURATION**

Saturation is the proportion of pure chromatic color in the total color sensation. The saturation of a color is determined by a combination of light intensity and how much it is distributed across the spectrum of different wavelengths.

## **DNR (Digital Noise Reduction)**

The DNR function can decrease the noise effect, especially when capturing moving images in poor light conditions and delivering more accurate and sharp image.

## **MIRROR**

**OFF**, **H**, **V**, and **HV** are selectable for mirror.

**OFF**: The mirror function is disabled.

**H**: The image flips 180° horizontally.

**V**: The image flips 180° vertically.

**HV**: The image flips 180° both horizontally and vertically.

## **3.6 FACTORY DEFAULT**

Move the cursor to **FACTORY DEFAULT** and click **Iris+** to reset all the settings to the factory default.

## **3.7 EXIT**

Move the cursor to **EXIT** and click **Iris+** to exit the menu without saving.

## **3.8 SAVE & EXIT**

Move the cursor to **SAVE & EXIT** and click **Iris+** to save the settings, and exit the menu.