



Test Report issued under the responsibility of:



TEST REPORT

IEC 62368-1

Audio/video, information and communication technology equipment

Part 1: Safety requirements

Report Number : SHES230400709801

Date of issue : 2023-04-28

Total number of pages : 63 pages

Name of Testing Laboratory preparing the Report : SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Applicant's name : Hangzhou Hikvision Digital Technology Co., Ltd.

Address : No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China.

Test specification:

Standard : IEC 62368-1:2014

Test procedure : CB Scheme

Non-standard test method : N/A

TRF template used : IECEE OD-2020-F1:2021, Ed.1.4

Test Report Form No. : IEC62368_1D

Test Report Form(s) Originator .. : UL(US)

Master TRF : Dated 2022-04-14

Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.



This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test Item description		NETWORK STORAGE SYSTEM	
Trade Mark(s)		HIKVISION	
Manufacturer.....		Same as applicant	
Model/Type reference		See page 8	
Ratings		See page 8	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):			
<input checked="" type="checkbox"/>	CB Testing Laboratory:	SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.	
Testing location/ address		588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China.	
Tested by (name, function, signature)		Emilien Li Project Engineer	
Approved by (name, function, signature)		Leo Wang Reviewer	
<input type="checkbox"/>	Testing procedure: CTF Stage 1:		
Testing location/ address			
Tested by (name, function, signature)			
Approved by (name, function, signature)			
<input type="checkbox"/>	Testing procedure: CTF Stage 2:		
Testing location/ address			
Tested by (name, function, signature)			
Witnessed by (name, function, signature)			
Approved by (name, function, signature)			
<input type="checkbox"/>	Testing procedure: CTF Stage 3 :		
<input type="checkbox"/>	Testing procedure: CTF Stage 4:		
Testing location/ address			
Tested by (name, function, signature)			
Witnessed by (name, function, signature)			
Approved by (name, function, signature)			
Supervised by (name, function, signature)			

List of Attachments (including a total number of pages in each attachment): Attachment 1 – 29 pages of Photos documents; Attachment 2 – 10 pages of European group differences and national differences; Attachment 3 – 1 pages of Safety information.	
Summary of testing: The sample(s) tested complies with the requirements of IEC 62368-1: 2014 (Second Edition) and EN 62368-1:2014+A11:2017. All test data in this report are copied from original CB test report E307937-A6224-IT-1(Cert. DK-132848-UL), dated 2022-10-08 with the following changes and/or additions. - Add models which are identical except for model name. - Update the address of factory, please see cover page for details. After comparison, no additional test was considered necessary. Heating test: Tma = 40°C (declared by manufacturer) K-type thermocouple used for temperature measurement.	
Tests performed (name of test and test clause): <input checked="" type="checkbox"/> 4. General requirements <input checked="" type="checkbox"/> 5. Electrically-caused injury <input checked="" type="checkbox"/> 6. Electrically-caused fire <input checked="" type="checkbox"/> 7. Injury caused by hazardous substances <input checked="" type="checkbox"/> 8. Mechanically-caused injury <input checked="" type="checkbox"/> 9. Thermal burn injury <input checked="" type="checkbox"/> 10. Radiation <input checked="" type="checkbox"/> Annex B. Normal operating condition tests, abnormal operating condition tests and single fault condition tests <input checked="" type="checkbox"/> Annex F.3.9. Performance of Marking test <input checked="" type="checkbox"/> Annex M Equipment containing batteries and their protection circuits <input checked="" type="checkbox"/> Annex Q. Limited Power Source <input checked="" type="checkbox"/> Annex T. Mechanical strength tests <input checked="" type="checkbox"/> Annex V. Determination of accessible parts	Testing location: SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. 588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China.
Summary of compliance with National Differences (List of countries addressed): 1. EU Group Differences (EN 62368-1:2014+A11:2017) 2. EU Special National Conditions, EU A-deviations: DE, DK, FI, GB, IE, NO, SE Explanation of used codes: DE=Germany, DK=Denmark, FI=Finland, GB= United Kingdom, IE=Ireland, NO=Norway, SE=Sweden <input checked="" type="checkbox"/> The product fulfils the above requirements.	
Use of uncertainty of measurement for decisions on conformity (decision rule) : <input checked="" type="checkbox"/> No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy	

method”).

☐ Other:... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

Information on uncertainty of measurement:

The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective National Certification Body that own these marks.

Marking for model DS-A72024R-ICVS**Marking for model DS-A72036R-ICVS****Remark:**

- 1) The Height of CE logo shall not be less than 5 mm; Height of WEEE logo shall not be less than 7 mm.
- 2) The marking plates for other models are of the same pattern except for model name and trade mark.
- 3) As declared by the applicant, the importer (and manufacturer, if it is different)'s name, registered trade name or registered trade mark and the postal address will be marked on the products before being place on the market. The contact details shall be in a language easily understood by end-users and market surveillance authorities.

TEST ITEM PARTICULARS:	
Classification of use by	<input checked="" type="checkbox"/> Ordinary person <input checked="" type="checkbox"/> Instructed person <input checked="" type="checkbox"/> Skilled person <input checked="" type="checkbox"/> Children likely to be present
Supply Connection	<input checked="" type="checkbox"/> AC Mains <input type="checkbox"/> DC Mains <input type="checkbox"/> External Circuit - not Mains connected - <input type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3
Supply % Tolerance	<input checked="" type="checkbox"/> +10%/-10% <input type="checkbox"/> +20%/-15% <input type="checkbox"/> +____%/ -____% <input type="checkbox"/> None
Supply Connection – Type	<input checked="" type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input checked="" type="checkbox"/> appliance coupler <input type="checkbox"/> direct plug-in <input type="checkbox"/> mating connector <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> permanent connection <input type="checkbox"/> mating connector <input type="checkbox"/> other: Not directly connected to mains
Considered current rating of protective device as part of building or equipment installation.....	16 A; Installation location: <input checked="" type="checkbox"/> building; <input type="checkbox"/> equipment
Equipment mobility.....	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input checked="" type="checkbox"/> stationary <input type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in <input type="checkbox"/> rack-mounting <input checked="" type="checkbox"/> wall-mounted
Over voltage category (OVC)	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other: Not directly connected to mains
Class of equipment	<input checked="" type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III
Access location	<input type="checkbox"/> restricted access location <input checked="" type="checkbox"/> N/A
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
Manufacturer's specified maximum operating ambient	40°C
IP protection class	<input checked="" type="checkbox"/> IPX0
Power Systems	<input checked="" type="checkbox"/> TN <input checked="" type="checkbox"/> TT <input type="checkbox"/> IT - ____ V L-L
Altitude during operation (m)	<input type="checkbox"/> 2000 m or less <input checked="" type="checkbox"/> _5000_ m
Altitude of test laboratory (m)	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> 100 m
Mass of equipment (kg)	<input checked="" type="checkbox"/> DS-A72024R-ICVS/P: Approx. 43,37kg <input checked="" type="checkbox"/> DS-A72036R-ICVS/P: Approx. 53,11kg

Possible test case verdicts:	
- test case does not apply to the test object	N/A
- test object does meet the requirement	P (Pass)
- test object does not meet the requirement	F (Fail)
Testing	
Date of receipt of test item	2023-04-20
Date (s) of performance of tests	2023-04-20 to 2023-04-23
General remarks:	
<p>"(See Enclosure #)" refers to additional information appended to the report.</p> <p>"(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> <p>This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.</p> <p>Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IECEE 02:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Not applicable Factory declaration letter, pdf, dated on 2023-04-27.
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies).....	1. Hangzhou Hikvision Technology Co., Ltd. No.700, Dongliu Road, Binjiang District, Hangzhou City, Zhejiang, 310052, China. 2. Hangzhou Hikvision Electronics Co., Ltd. No.299, Qiushi Road, Tonglu Economic Development Zone, Tonglu County, Hangzhou, Zhejiang, 311500, China. 3. Chongqing Hikvision technology Co., Ltd. No. 118, Haikang Road, Area C, Jianqiao Industrial Park, Dadukou District, Chongqing, 401325, China.
General product information and other remarks:	

Product Description –

Functions	Unit was supplied by 2 inserted power supply module. Consist of fan, CPU, HDD(or SSD) and mainboard. All components were mounted on PWB and housed with metal enclosure. Only limited plastic enclosure near system switch. The cover is secured by screw.
Material of enclosure	Metal & Plastic
Others	Indoor use only

Model List:		Ratings
DS-A72024R-ICVS/P	DS-A71X24X-XXXX/XXXX	100-240Va.c., 50/60Hz, 7,0-3,5A, Class I
DS-A72X24X-XXXX/XXXX	DS-A72024R	
DS-A72XXXXXXXXXXXXXXXXXX	DS-A71XXXXXXXXXXXXXXXXXX	
(X =A-Z, a-z, 0-9, blank "/", can be optional, X can be denotes different sales area, denotes different software version, denotes different customer codes)		
DS-A72036R-ICVS/P	DS-A71X36X-XXXX/XXXX	100-127Va.c., 50/60Hz, 10A; 200-240Va.c., 50/60Hz, 5A, Class I
DS-A72X36X-XXXX/XXXX	DS-A72036R	
DS-A72XXXXXXXXXXXXXXXXXX	DS-A71XXXXXXXXXXXXXXXXXX	
(X =A-Z, a-z, 0-9, blank "/", can be optional, X can be denotes different sales area, denotes different software version, denotes different customer codes)		

Model Differences –

Model DS-A72036R-ICVS/P is similar to DS-A72024R-ICVS/P, except for PSU, number of HDD(or SSD), minor difference of mainboard and model designation.

DS-A71X24X-XXXX/XXXX, DS-A72X24X-XXXX/XXXX are identical to DS-A72024R-ICVS/P except model name.

DS-A71X36X-XXXX/XXXX, DS-A72X36X-XXXX/XXXX are identical to DS-A72036R-ICVS/P except model name.

Additional application considerations – (Considerations used to test a component or sub-assembly) –

N/A

ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:

(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.)

(Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.)

Electrically-caused injury (Clause 5):

(Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification)

Example: +5 V dc input

ES1

Source of electrical energy	Corresponding classification (ES)
AC mains input	ES3
PSU module output	ES1
All output connectors	ES1

Electrically-caused fire (Clause 6):

(Note: List sub-assembly or circuit designation and corresponding energy source classification)

Example: Battery pack (maximum 85 watts):

PS2

Source of power or PIS	Corresponding classification (PS)
Primary circuit and secondary circuit except for all accessible terminal and speakers	PS3
Output ports	PS2

Injury caused by hazardous substances (Clause 7)

(Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.)

Example: Liquid in filled component

Glycol

Source of hazardous substances	Corresponding chemical
Lithium coin battery	Lithium-ion

Mechanically-caused injury (Clause 8)

(Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.)

Example: Wall mount unit

MS2

Source of kinetic/mechanical energy	Corresponding classification (MS)
Sharp edges and corners	MS1
All other Moving fans	MS3
Moving fan at HDD board	MS1
Equipment mass	MS3

Thermal burn injury (Clause 9)

(Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.)

Example: Hand-held scanner – thermoplastic enclosure

TS1

Source of thermal energy	Corresponding classification (TS)
Accessible parts	TS1

Radiation (Clause 10)

(Note: List the types of radiation present in the product and the corresponding energy source classification.)

Example: DVD – Class 1 Laser Product


RS1

Type of radiation	Corresponding classification (RS)
Indicator LEDs	RS1

ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:	
Optical module (optional)	RS1

ENERGY SOURCE DIAGRAM

Indicate which energy sources are included in the energy source diagram. Insert diagram below

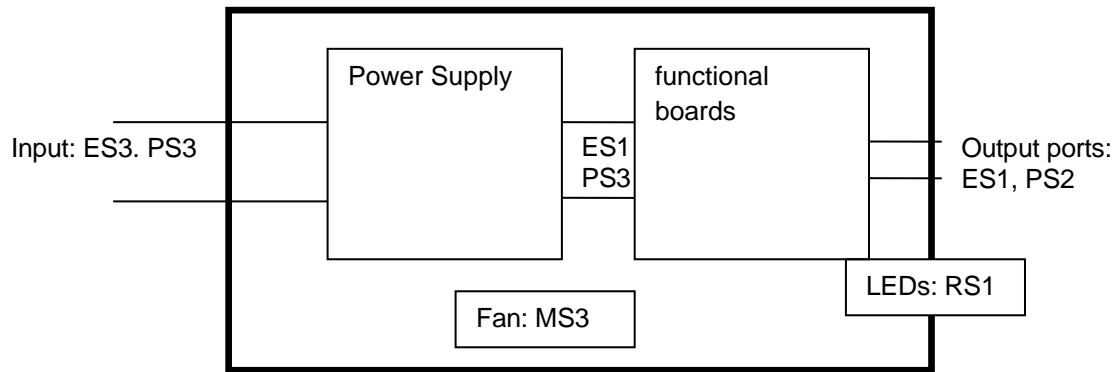

Enclosure: ES1, MS1, TS1
Mass: MS3 DC Fan: MS3

■ ES ■ PS ■ MS ■ TS ■ RS

OVERVIEW OF EMPLOYED SAFEGUARDS				
Clause	Possible Hazard			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary person (metal enclosure)	ES3: Power Supply primary circuits	Basic Insulation	Protective Earthing	N/A
Ordinary person (secondary accessible ports)	ES3: Power Supply primary circuits	Basic Insulation	Supplementary Insulation	N/A
Ordinary person	ES1: All accessible parts	N/A	N/A	N/A
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		
		Basic	Supplementary	Reinforced
Internal combustible materials	PS3: Internal circuits	1. No ignition occurred. 2. No parts exceeding 90% of its spontaneous ignition temperature. 3. combustible material outside fire enclosure is of min HB	1. PCB is of min V-1 material 2. All other components were mounted on min V-1 PCB or of min V-2 or small parts of combustible material less than 4g. 3. Fire enclosure provided	N/A
Output	PS2	N/A	N/A	N/A
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary person	Lithium coin battery	N/A	N/A	Comply with Annex M
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3:High Pressure Lamp)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary person	MS1: Sharp edges and corners	N/A	N/A	N/A
Ordinary person	MS3: Equipment mass	N/A	N/A	Adequate

				stability means
Ordinary person	MS3: Fan	N/A	N/A	The fan is fixed inside the product and cannot be touched
9.1	Thermal Burn			
Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary person	TS1: Accessible parts	N/A	N/A	N/A
10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary person	RS1: LEDs	N/A	N/A	N/A
Ordinary person	Optical module (optional): RS1	N/A	N/A	N/A
Supplementary Information:				
(1) See attached energy source diagram for additional details.				
(2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4	GENERAL REQUIREMENTS		P
4.1.1	Acceptance of materials, components and subassemblies		P
4.1.2	Use of components	<p>Certified components are used in accordance with their ratings. certifications and they comply with applicable parts of this standard.</p> <p>Components not certified are used in accordance with their ratings and they comply with applicable parts of this standard and the relevant component standard.</p> <p>Components. for which no relevant IEC-standard exists. have been tested under the conditions occurring in the equipment. using applicable parts of this standard.</p>	P
4.1.3	Equipment design and construction		P
4.1.15	Markings and instructions.....:	(See Annex F)	P
4.4.4	Safeguard robustness		P
4.4.4.2	Steady force tests.....:	(See Annex T.5)	P
4.4.4.3	Drop tests.....:		N/A
4.4.4.4	Impact tests.....:	(See Annex T.6)	P
4.4.4.5	Internal accessible safeguard enclosure and barrier tests.....:		N/A
4.4.4.6	Glass Impact tests.....:		N/A
4.4.4.7	Thermoplastic material tests.....:	(See Annex T.8)	P
4.4.4.8	Air comprising a safeguard.....:		N/A
4.4.4.9	Accessibility and safeguard effectiveness		P
4.5	Explosion	No explosion.	P
4.6	Fixing of conductors		P
4.6.1	Fix conductors not to defeat a safeguard		P
4.6.2	10 N force test applied to.....:	<p>(See Clause T.2)</p> <p>Checked by inspection and 10 N applied to all components other than the parts serving as an enclosure.</p>	P
4.7	Equipment for direct insertion into mains socket - outlets	Not such equipment.	N/A
4.7.2	Mains plug part complies with the relevant standard.....:		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.3	Torque (Nm)		N/A
4.8	Products containing coin/button cell batteries	Professional Equipment	N/A
4.8.2	Instructional safeguard		N/A
4.8.3	Battery Compartment Construction		N/A
	Means to reduce the possibility of children removing the battery		--
4.8.4	Battery Compartment Mechanical Tests		N/A
4.8.5	Battery Accessibility		N/A
4.9	Likelihood of fire or shock due to entry of conductive object.....	(See Annex P)	P

5	ELECTRICALLY-CAUSED INJURY		P
5.2.1	Electrical energy source classifications.....		P
5.2.2	ES1, ES2 and ES3 limits		P
5.2.2.2	Steady-state voltage and current.....		P
5.2.2.3	Capacitance limits	approved internal power supply	N/A
5.2.2.4	Single pulse limits		N/A
5.2.2.5	Limits for repetitive pulses		N/A
5.2.2.6	Ring signals		N/A
5.2.2.7	Audio signals		N/A
5.3	Protection against electrical energy sources		P
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons		P
5.3.2.1	Accessibility to electrical energy sources and safeguards		P
5.3.2.2	Contact requirements		P
	a) Test with test probe from Annex V		P
	b) Electric strength test potential (V)		N/A
	c) Air gap (mm)		N/A
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	Insulation materials and requirements		P
5.4.1.2	Properties of insulating material		P
5.4.1.3	Humidity conditioning	approved internal power supply	P
5.4.1.4	Maximum operating temperature for insulating materials		P
5.4.1.5	Pollution degree	2	--
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.1.6	Insulation in transformers with varying dimensions		N/A
5.4.1.7	Insulation in circuits generating starting pulses		N/A
5.4.1.8	Determination of working voltage	approved internal power supply	P
5.4.1.9	Insulating surfaces		N/A
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		N/A
5.4.1.10.2	Vicat softening temperature..... :	(See appended table 5.4.1.10.2)	N/A
5.4.1.10.3	Ball pressure :	(See appended table 5.4.1.10.3)	N/A
5.4.2	Clearances	evaluated in internal power supply report	P
5.4.2.2	Determining clearance using peak working voltage	(See appended table 5.4.2.2)	N/A
5.4.2.3	Determining clearance using required withstand voltage :	(See appended table 5.4.2.3)	N/A
	a) a.c. mains transient voltage :	2500	--
	b) d.c. mains transient voltage :		--
	c) external circuit transient voltage :		--
	d) transient voltage determined by measurement :		--
5.4.2.4	Determining the adequacy of a clearance using an electric strength test	(See appended table 5.4.2.4)	N/A
5.4.2.5	Multiplication factors for clearances and test voltages :		N/A
5.4.3	Creepage distances :	evaluated in internal power supply report	P
5.4.3.1	General		N/A
5.4.3.3	Material Group :	IIIb	--
5.4.4	Solid insulation	approved internal power supply	P
5.4.4.2	Minimum distance through insulation :	(See appended table 5.4.4.2)	N/A
5.4.4.3	Insulation compound forming solid insulation		N/A
5.4.4.4	Solid insulation in semiconductor devices		N/A
5.4.4.5	Cemented joints		N/A
5.4.4.6	Thin sheet material		N/A
5.4.4.6.1	General requirements		N/A
5.4.4.6.2	Separable thin sheet material		N/A
	Number of layers (pcs) :		N/A
5.4.4.6.3	Non-separable thin sheet material		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material :	(See appended Table 5.4.9)	N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.4.9	Solid insulation at frequencies >30 kHz	(See appended Table 5.4.4.9)	N/A
5.4.5	Antenna terminal insulation		N/A
5.4.5.1	General		N/A
5.4.5.2	Voltage surge test		N/A
	Insulation resistance (MΩ).....		--
5.4.6	Insulation of internal wire as part of supplementary safeguard	(See appended table 5.4.4.2)	N/A
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning	approved internal power supply for solid insulation	N/A
	Relative humidity (%).....		--
	Temperature (°C)		--
	Duration (h)		--
5.4.9	Electric strength test	(See appended table 5.4.9)	P
5.4.9.1	Test procedure for a solid insulation type test		N/A
5.4.9.2	Test procedure for routine tests		N/A
5.4.10	Protection against transient voltages between external circuit		N/A
5.4.10.1	Parts and circuits separated from external circuits	(See appended table 5.4.9)	N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test	(See appended table 5.4.9)	N/A
5.4.10.2.3	Steady-state test.....	(See appended table 5.4.9)	N/A
5.4.11	Insulation between external circuits and earthed circuitry	(See appended table 5.4.9)	N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	Rated operating voltage U_{op} (V).....		--
	Nominal voltage U_{peak} (V).....		--
	Max increase due to variation U_{sp}		--
	Max increase due to ageing ΔU_{sa}		--
	$U_{op} = U_{peak} + \Delta U_{sp} + \Delta U_{sa}$		--
5.5	Components as safeguards		P
5.5.1	General	approved internal power supply	P
5.5.2	Capacitors and RC units		N/A
5.5.2.1	General requirement		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector.....:	(See appended table 5.5.2.2)	N/A
5.5.3	Transformers	(See Annex G.5.3)	N/A
5.5.4	Optocouplers	(See sub-clause 5.4 or Annex G.12)	N/A
5.5.5	Relays	(See Annex G.2)	N/A
5.5.6	Resistors	(See Annex G.10)	N/A
5.5.7	SPD's	(See Annex G.8)	N/A
5.5.7.1	Use of an SPD connected to reliable earthing		N/A
5.5.7.2	Use of an SPD between mains and protective earth		N/A
5.5.8	Insulation between the mains and external circuit consisting of a coaxial cable.....:	(See Annex G.10.3)	N/A
5.6	Protective conductor		P
5.6.2	Requirement for protective conductors	evaluated in internal power supply report	P
5.6.2.1	General requirements		P
5.6.2.2	Colour of insulation		P
5.6.3	Requirement for protective earthing conductors		P
	Protective earthing conductor size (mm ²)	min. 0.75	--
5.6.4	Requirement for protective bonding conductors		P
5.6.4.1	Protective bonding conductors		P
	Protective bonding conductor size (mm ²).	min. 0.75	--
	Protective current rating (A)	<25A	--
5.6.4.3	Current limiting and overcurrent protective devices		P
5.6.5	Terminals for protective conductors		P
5.6.5.1	Requirement		P
	Conductor size (mm ²). nominal thread diameter (mm).	min. 0.75mm ² . min. 3.5mm	P
5.6.5.2	Corrosion		P
5.6.6	Resistance of the protective system		P
5.6.6.1	Requirements		P
5.6.6.2	Test Method Resistance (Ω).....:	(See appended table 5.6.6.2)	P
5.6.7	Reliable earthing		N/A
5.7	Prospective touch voltage. touch current and protective conductor current		P
5.7.2	Measuring devices and networks	evaluated in internal power supply report	P
5.7.2.1	Measurement of touch current	(See appended table 5.7.4)	P
5.7.2.2	Measurement of prospective touch voltage		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.3	Equipment set-up. supply connections and earth connections		P
	System of interconnected equipment (separate connections/single connection)		--
	Multiple connections to mains (one connection at a time/simultaneous connections)		--
5.7.4	Earthed conductive accessible parts	(See appended Table 5.7.4)	P
5.7.5	Protective conductor current		N/A
	Supply Voltage (V)		--
	Measured current (mA)		--
	Instructional Safeguard	(See F.4 and F.5)	N/A
5.7.6	Prospective touch voltage and touch current due to external circuits		N/A
5.7.6.1	Touch current from coaxial cables		N/A
5.7.6.2	Prospective touch voltage and touch current from external circuits		N/A
5.7.7	Summation of touch currents from external circuits		N/A
	a) Equipment with earthed external circuits Measured current (mA)		N/A
	b) Equipment whose external circuits are not referenced to earth. Measured current (mA)		N/A


6	ELECTRICALLY- CAUSED FIRE		P
6.2	Classification of power sources (PS) and potential ignition sources (PIS)		P
6.2.2	Power source circuit classifications		P
6.2.2.1	General		P
6.2.2.2	Power measurement for worst-case load fault ... :	The internal circuit is considered as PS3 without test.	P
6.2.2.3	Power measurement for worst-case power source fault	Outputs are LPS and considered as PS1/PS2	P
6.2.2.4	PS1		N/A
6.2.2.5	PS2	Output port	P
6.2.2.6	PS3	The product is powered by PS3. And internal circuit is considered as PS3 without test.	P
6.2.3	Classification of potential ignition sources		P
6.2.3.1	Arcing PIS	No primary parts	N/A
6.2.3.2	Resistive PIS	The internal circuit is considered as resistive PIS without test.	P
6.3	Safeguards against fire under normal operating and abnormal operating conditions		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.3.1 (a)	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 C for unknown materials :	(See appended table 5.4.1.5. 6.3.2. 9.0. B.2.6)	P
6.3.1 (b)	Combustible materials outside fire enclosure		N/A
6.4	Safeguards against fire under single fault conditions		P
6.4.1	Safeguard Method	Control fire spread used.	P
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits		N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits		N/A
6.4.3.1	General		N/A
6.4.3.2	Supplementary Safeguards		N/A
	Special conditions if conductors on printed boards are opened or peeled		N/A
6.4.3.3	Single Fault Conditions..... :	(See appended table 6.4.3)	N/A
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		P
6.4.5	Control of fire spread in PS2 circuits		N/A
6.4.5.2	Supplementary safeguards :	(See appended tables 4.1.2 and Annex G)	P
6.4.6	Control of fire spread in PS3 circuit		P
6.4.7	Separation of combustible materials from a PIS		N/A
6.4.7.1	General..... :	(See tables 6.2.3.1 and 6.2.3.2)	N/A
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers		P
6.4.8.1	Fire enclosure and fire barrier material properties		P
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure		P
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		P
6.4.8.3.1	Fire enclosure and fire barrier openings		P
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top Openings in Fire Enclosure: dimensions (mm) :	No openings on the top enclosure. all side openings exceed 5mm are not within the fire zone of PIS.	P
	Needle Flame test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.4.8.3.4	Bottom Openings in Fire Enclosure. condition met a). b) and/or c) dimensions (mm)	No openings in the bottom enclosure, all side openings exceed 5mm are not within the fire zone of PIS. For appliance inlet side enclosure, openings are around fans and have been evaluated in internal power supply for accessible.	P
	Flammability tests for the bottom of a fire enclosure		N/A
6.4.8.3.5	Integrity of the fire enclosure. condition met: a). b) or c)	No door or cover.	N/A
6.4.8.4	Separation of PIS from fire enclosure and fire barrier distance (mm) or flammability rating	[] minimum 5mm from resistive PIS. [x] enclosure is metal	P
6.5	Internal and external wiring		P
6.5.1	Requirements		P
6.5.2	Cross-sectional area (mm ²)		--
6.5.3	Requirements for interconnection to building wiring	(See Annex Q.)	N/A
6.6	Safeguards against fire due to connection to additional equipment		P
	External port limited to PS2 or complies with Clause Q.1	see Table annex Q.1	P

7	INJURY CAUSED BY HAZARDOUS SUBSTANCES		P
7.2	Reduction of exposure to hazardous substances		N/A
7.3	Ozone exposure		N/A
7.4	Use of personal safeguards (PPE)		N/A
	Personal safeguards and instructions		--
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010)		--
7.6	Batteries.....	(See Annex M)	P

8	MECHANICALLY-CAUSED INJURY		P
8.1	General	MS3: Equipment mass. MS1: Sharp edges and corners. No sharp edges or corners. MS1: fan at HDD board MS3: all other fans	P
8.2	Mechanical energy source classifications		P
8.3	Safeguards against mechanical energy sources		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.4	Safeguards against parts with sharp edges and corners	No sharp edges or corners. MS1	P
8.4.1	Safeguards		N/A
8.5	Safeguards against moving parts		P
8.5.1	MS2 or MS3 part required to be accessible for the function of the equipment	The DC Fan is within the limits under normal and fault conditions. MS3	P
8.5.2	Instructional Safeguard	 The fan is fixed inside the product and cannot be touched.	--
8.5.4	Special categories of equipment comprising moving parts		N/A
8.5.4.1	Large data storage equipment		N/A
8.5.4.2	Equipment having electromechanical device for destruction of media		N/A
8.5.4.2.1	Safeguards and Safety Interlocks	(See Annex F.4 and Annex K)	N/A
8.5.4.2.2	Instructional safeguards against moving parts		N/A
	Instructional Safeguard		--
8.5.4.2.3	Disconnection from the supply		N/A
8.5.4.2.4	Probe type and force (N)		N/A
8.5.5	High Pressure Lamps	No such part.	N/A
8.5.5.1	Energy Source Classification		N/A
8.5.5.2	High Pressure Lamp Explosion Test.....	(See appended table 8.5.5.2)	N/A
8.6	Stability	Equipment mass: MS3	P
8.6.1	Product classification		P
	Instructional Safeguard		--
8.6.2	Static stability		P
8.6.2.2	Static stability test	10 degree	P
	Applied Force		--
8.6.2.3	Downward Force Test		N/A
8.6.3	Relocation stability test	non-floor standing	N/A
	Unit configuration during 10° tilt.....		--
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test (Applied Force).....		N/A
	Position of feet or movable parts.....		--
8.7	Equipment mounted to wall or ceiling		N/A
8.7.1	Mounting Means (Length of screws (mm) and mounting surface)		N/A
8.7.2	Direction and applied force.....		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.8	Handles strength		P
8.8.1	Classification		P
8.8.2	Applied Force	For model DS-A72024R-ICVS/P: EUT weight plus two times the weight of the EUT. For model DS-A72036R-ICVS/P: EUT weight plus 100 kg.	P
8.9	Wheels or casters attachment requirements	No such part.	N/A
8.9.1	Classification		N/A
8.9.2	Applied force		--
8.10	Carts, stands and similar carriers	No such part.	N/A
8.10.1	General		N/A
8.10.2	Marking and instructions		N/A
	Instructional Safeguard		--
8.10.3	Cart, stand or carrier loading test and compliance		N/A
	Applied force		--
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Applied horizontal force (N)		--
8.10.6	Thermoplastic temperature stability (°C)		N/A
8.11	Mounting means for rack mounted equipment	No such part.	N/A
8.11.1	General		N/A
8.11.2	Product Classification		N/A
8.11.3	Mechanical strength test, variable <i>N</i>		N/A
8.11.4	Mechanical strength test 250N, including end stops		N/A
8.12	Telescoping or rod antennas	No such part.	N/A
	Button/Ball diameter (mm)		--

9	THERMAL BURN INJURY		P
9.2	Thermal energy source classifications	TS1 for accessible parts.	P
9.3	Safeguard against thermal energy sources	Enclosure safeguard	P
9.4	Requirements for safeguards		P
9.4.1	Equipment safeguard		P
9.4.2	Instructional safeguard	Not used.	N/A

10	RADIATION		P
10.2	Radiation energy source classification		P
10.2.1	General classification	RS1 for LEDs.	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.3	Protection against laser radiation	No such part.	N/A
	Laser radiation that exists equipment:		--
	Normal. abnormal. single-fault..... :		N/A
	Instructional safeguard :		--
	Tool..... :		--
10.4	Protection against visible. infrared. and UV radiation	RS1 for LEDs.	P
10.4.1	General		P
10.4.1.a)	RS3 for Ordinary and instructed persons :		N/A
10.4.1.b)	RS3 accessible to a skilled person..... :		N/A
	Personal safeguard (PPE) instructional safeguard..... :		--
10.4.1.c)	Equipment visible. IR. UV does not exceed RS1 . :	RS1 for LEDs.	P
10.4.1.d)	Normal. abnormal. single-fault conditions :		P
10.4.1.e)	Enclosure material employed as safeguard is opaque..... :		N/A
10.4.1.f)	UV attenuation :		N/A
10.4.1.g)	Materials resistant to degradation UV :		N/A
10.4.1.h)	Enclosure containment of optical radiation..... :		N/A
10.4.1.i)	Exempt Group under normal operating conditions..... :		P
10.4.2	Instructional safeguard :		N/A
10.5	Protection against x-radiation	No such radiation.	N/A
10.5.1	X- radiation energy source that exists equipment :		N/A
	Normal. abnormal. single fault conditions		N/A
	Equipment safeguards..... :		N/A
	Instructional safeguard for skilled person..... :		N/A
10.5.3	Most unfavourable supply voltage to give maximum radiation :		--
	Abnormal and single-fault condition :		N/A
	Maximum radiation (pA/kg)..... :		N/A
10.6	Protection against acoustic energy sources	No such radiation.	N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output. dB(A) :		N/A
	Output voltage. unweighted r.m.s..... :		N/A
10.6.4	Protection of persons		N/A
	Instructional safeguards :		N/A
	Equipment safeguard prevent ordinary person to		--

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	RS2..... :		
	Means to actively inform user of increase sound pressure..... :		--
	Equipment safeguard prevent ordinary person to RS2..... :		--
10.6.5	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.5.1	Corded passive listening devices with analog input		N/A
	Input voltage with 94 dB(A) L_{Aeq} acoustic pressure output..... :		--
10.6.5.2	Corded listening devices with digital input		N/A
	Maximum dB(A)..... :		--
10.6.5.3	Cordless listening device		N/A
	Maximum dB(A)..... :		--

B	NORMAL OPERATING CONDITION TESTS. ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS		P
B.2	Normal Operating Conditions		P
B.2.1	General requirements..... :	(See Test Item Particulars and appended test tables)	P
	Audio Amplifiers and equipment with audio amplifiers :	No such part.	N/A
B.2.3	Supply voltage and tolerances		P
B.2.5	Input test..... :	(See appended table B.2.5)	P
B.3	Simulated abnormal operating conditions		P
B.3.1	General requirements..... :	(See appended table B.3)	P
B.3.2	Covering of ventilation openings		P
B.3.3	D.C. mains polarity test		N/A
B.3.4	Setting of voltage selector :		N/A
B.3.5	Maximum load at output terminals :	(See appended table B.3)	P
B.3.6	Reverse battery polarity		N/A
B.3.7	Abnormal operating conditions as specified in Clause E.2.		N/A
B.3.8	Safeguards functional during and after abnormal operating conditions		P
B.4	Simulated single fault conditions		P
B.4.2	Temperature controlling device open or short-circuited :	(See appended table B.4)	N/A
B.4.3	Motor tests		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.4.3.1	Motor blocked or rotor locked increasing the internal ambient temperature :	(See Clause G.5)	P
B.4.4	Short circuit of functional insulation		N/A
B.4.4.1	Short circuit of clearances for functional insulation		P
B.4.4.2	Short circuit of creepage distances for functional insulation		P
B.4.4.3	Short circuit of functional insulation on coated printed boards		P
B.4.5	Short circuit and interruption of electrodes in tubes and semiconductors		N/A
B.4.6	Short circuit or disconnect of passive components		P
B.4.7	Continuous operation of components		N/A
B.4.8	Class 1 and Class 2 energy sources within limits during and after single fault conditions		P
B.4.9	Battery charging under single fault conditions ... :	(See Annex M)	P
C	UV RADIATION		N/A
C.1	Protection of materials in equipment from UV radiation		N/A
C.1.2	Requirements		N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure apparatus		N/A
C.2.4	Xenon-arc light exposure apparatus		N/A
D	TEST GENERATORS		N/A
D.1	Impulse test generators		N/A
D.2	Antenna interface test generator		N/A
D.3	Electronic pulse generator		N/A
E	TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS		N/A
E.1	Audio amplifier normal operating conditions	No such part	N/A
	Audio signal voltage (V) :		--
	Rated load impedance (Ω) :		--
E.2	Audio amplifier abnormal operating conditions		N/A
F	EQUIPMENT MARKINGS. INSTRUCTIONS. AND INSTRUCTIONAL SAFEGUARDS		P
F.1	General requirements		P
	Instructions – Language :	English	--
F.2	Letter symbols and graphical symbols		P
F.2.1	Letter symbols according to IEC60027-1		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.2.2	Graphic symbols IEC, ISO or manufacturer specific		P
F.3	Equipment markings		P
F.3.1	Equipment marking locations	Exterior of equipment.	P
F.3.2	Equipment identification markings		P
F.3.2.1	Manufacturer identification	See copy of marking plate	--
F.3.2.2	Model identification	See copy of marking plate	--
F.3.3	Equipment rating markings	See copy of marking plate	P
F.3.3.1	Equipment with direct connection to mains		P
F.3.3.2	Equipment without direct connection to mains	Rating marked	N/A
F.3.3.3	Nature of supply voltage.....	See copy of marking plate	--
F.3.3.4	Rated voltage	See copy of marking plate	--
F.3.3.4	Rated frequency	See copy of marking plate	--
F.3.3.6	Rated current or rated power	See copy of marking plate	--
F.3.3.7	Equipment with multiple supply connections		P
F.3.4	Voltage setting device	No such part.	N/A
F.3.5	Terminals and operating devices		N/A
F.3.5.1	Mains appliance outlet and socket-outlet markings		N/A
F.3.5.2	Switch position identification marking		N/A
F.3.5.3	Replacement fuse identification and rating markings	Certification internal power supply.	P
F.3.5.4	Replacement battery identification marking		N/A
F.3.5.5	Terminal marking location	No such marking.	N/A
F.3.6	Equipment markings related to equipment classification		P
F.3.6.1	Class I Equipment		P
F.3.6.1.1	Protective earthing conductor terminal		P
F.3.6.1.2	Neutral conductor terminal		P
F.3.6.1.3	Protective bonding conductor terminals		N/A
F.3.6.2	Class II equipment (IEC60417-5172)		N/A
F.3.6.2.1	Class II equipment with or without functional earth		N/A
F.3.6.2.2	Class II equipment with functional earth terminal marking		N/A
F.3.7	Equipment IP rating marking		--
F.3.8	External power supply output marking		N/A
F.3.9	Durability, legibility and permanence of marking		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.10	Test for permanence of markings	The label was subject to the permanence of marking test. The label was rubbed with cloth soaked with water for 15 sec. And then again for 15 sec. with cloth soaked with petroleum spirit. After this test there was no damage to the label. The marking on the label did not fade. There was no curling and lifting of the label edge.	P
F.4	Instructions		P
	a) Equipment for use in locations where children not likely to be present - marking		N/A
	b) Instructions given for installation or initial use		P
	c) Equipment intended to be fastened in place		N/A
	d) Equipment intended for use only in restricted access area		N/A
	e) Audio equipment terminals classified as ES3 and other equipment with terminals marked in accordance F.3.6.1		N/A
	f) Protective earthing employed as safeguard		P
	g) Protective earthing conductor current exceeding ES 2 limits		N/A
	h) Symbols used on equipment		P
	i) Permanently connected equipment not provided with all-pole mains switch		N/A
j)	j) Replaceable components or modules providing safeguard function		N/A
F.5	Instructional safeguards		P
	Where "instructional safeguard" is referenced in the test report it specifies the required elements. location of marking and/or instruction		P
G	COMPONENTS		P
G.1	Switches		N/A
G.1.1	General requirements		N/A
G.1.2	Ratings. endurance. spacing. maximum load		N/A
G.2	Relays		N/A
G.2.1	General requirements		N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supply power		N/A
G.2.4	Mains relay. modified as stated in G.2		N/A
G.3	Protection Devices		P
G.3.1	Thermal cut-offs		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.3.1.1a) &b)	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
G.3.1.1c)	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Thermal cut-off connections maintained and secure		N/A
G.3.2	Thermal links		N/A
G.3.2.1a)	Thermal links separately tested with IEC 60691		N/A
G.3.2.1b)	Thermal links tested as part of the equipment		N/A
	Aging hours (H)		--
	Single Fault Condition		--
	Test Voltage (V) and Insulation Resistance (Ω) :		--
G.3.3	PTC Thermistors		P
G.3.4	Overcurrent protection devices		P
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.5		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions.....		N/A
G.4	Connectors		P
G.4.1	Spacings		P
G.4.2	Mains connector configuration		P
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely		N/A
G.5	Wound Components		P
G.5.1	Wire insulation in wound components.....	approved internal power supply	P
G.5.1.2 a)	Two wires in contact inside wound component. angle between 45° and 90°		N/A
G.5.1.2 b)	Construction subject to routine testing		N/A
G.5.2	Endurance test on wound components		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Time (s)		--
	Temperature (°C)		--
G.5.2.3	Wound Components supplied by mains		N/A
G.5.3	Transformers		P
G.5.3.1	Requirements applied (IEC61204-7. IEC61558-1/-2. and/or IEC62368-1).....	approved internal power supply	P
	Position.....		--
	Method of protection		--

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.5.3.2	Insulation		N/A
	Protection from displacement of windings.....:		--
G.5.3.3	Overload test	(See appended table B.3)	N/A
G.5.3.3.1	Test conditions		N/A
G.5.3.3.2	Winding Temperatures testing in the unit		N/A
G.5.3.3.3	Winding Temperatures - Alternative test method		N/A
G.5.4	Motors		P
G.5.4.1	General requirements		P
	Position		--
G.5.4.2	Test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4	Locked-rotor overload test		N/A
	Test duration (days)		--
G.5.4.5	Running overload test for d.c. motors in secondary circuits		P
G.5.4.5.2	Tested in the unit		N/A
	Electric strength test (V)		--
G.5.4.5.3	Tested on the Bench - Alternative test method; test time (h)		N/A
	Electric strength test (V)		--
G.5.4.6	Locked-rotor overload test for d.c. motors in secondary circuits		P
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature		N/A
	Electric strength test (V)		N/A
G.5.4.6.3	Tested on the bench - Alternative test method; test time (h)		N/A
	Electric strength test (V)		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage		--
G.6	Wire Insulation		N/A
G.6.1	General	approved internal power supply	N/A
G.6.2	Solvent-based enamel wiring insulation		N/A
G.7	Mains supply cords		P
G.7.1	General requirements		P
	Type.....	See table 4.1.2	--

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Rated current (A)		--
	Cross-sectional area (mm ²). (AWG).....		--
G.7.2	Compliance and test method		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N)		--
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position. distance (mm)....		--
G.7.3.2.4	Strain relief comprised of polymeric material		N/A
G.7.4	Cord Entry		N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Mass (g)		--
	Diameter (m)		--
	Temperature (°C)		--
G.7.6	Supply wiring space		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Test with 8 mm strand		N/A
G.8	Varistors		N/A
G.8.1	General requirements	approved internal power supply	N/A
G.8.2	Safeguard against shock		N/A
G.8.3	Safeguard against fire		N/A
G.8.3.2	Varistor overload test		N/A
G.8.3.3	Temporary overvoltage		N/A
G.9	Integrated Circuit (IC) Current Limiters		P
G.9.1 a)	Manufacturer defines limit at max. 5A.		N/A
G.9.1 b)	Limiters do not have manual operator or reset		N/A
G.9.1 c)	Supply source does not exceed 250 VA		--
G.9.1 d)	IC limiter output current (max. 5A)		--
G.9.1 e)	Manufacturers' defined drift		--
G.9.2	Test Program 1		N/A
G.9.3	Test Program 2		N/A
G.9.4	Test Program 3		N/A
G.10	Resistors		N/A
G.10.1	General requirements		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.10.2	Resistor test		N/A
G.10.3	Test for resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable		N/A
G.10.3.1	General requirements		N/A
G.10.3.2	Voltage surge test		N/A
G.10.3.3	Impulse test		N/A
G.11	Capacitor and RC units		N/A
G.11.1	General requirements		N/A
G.11.2	Conditioning of capacitors and RC units		N/A
G.11.3	Rules for selecting capacitors		N/A
G.12	Optocouplers		N/A
	Optocouplers comply with IEC 60747-5-5:2007 Spacing or Electric Strength Test (specify option and test results)	approved internal power supply	N/A
	Type test voltage Vini		--
	Routine test voltage. Vini.b		--
G.13	Printed boards		P
G.13.1	General requirements	approved internal power supply	P
G.13.2	Uncoated printed boards		P
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
	Compliance with cemented joint requirements (Specify construction)		--
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation		N/A
	Number of insulation layers (pcs)		--
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2a)	Thermal conditioning		N/A
G.13.6.2b)	Electric strength test		N/A
G.13.6.2c)	Abrasion resistance test		N/A
G.14	Coating on components terminals		N/A
G.14.1	Requirements	(See G.13)	N/A
G.15	Liquid filled components		N/A
G.15.1	General requirements	No such part.	N/A
G.15.2	Requirements		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.15.3	Compliance and test methods		N/A
G.15.3.1	Hydrostatic pressure test		N/A
G.15.3.2	Creep resistance test		N/A
G.15.3.3	Tubing and fittings compatibility test		N/A
G.15.3.4	Vibration test		N/A
G.15.3.5	Thermal cycling test		N/A
G.15.3.6	Force test		N/A
G.15.4	Compliance		N/A
G.16	IC including capacitor discharge function (ICX)		N/A
a)	Humidity treatment in accordance with sc5.4.8 – 120 hours		N/A
b)	Impulse test using circuit 2 with $U_c =$ to transient voltage		N/A
C1)	Application of ac voltage at 110% of rated voltage for 2.5 minutes		N/A
C2)	Test voltage		--
D1)	10.000 cycles on and off using capacitor with smallest capacitance resistor with largest resistance specified by manufacturer		N/A
D2)	Capacitance		--
D3)	Resistance		--
H	CRITERIA FOR TELEPHONE RINGING SIGNALS		N/A
H.1	General	No ringing signal.	N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringing signal		N/A
H.3.1.1	Frequency (Hz)		--
H.3.1.2	Voltage (V)		--
H.3.1.3	Cadence; time (s) and voltage (V)		--
H.3.1.4	Single fault current (mA):.....		--
H.3.2	Tripping device and monitoring voltage		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage complied with		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V)		--
J	INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION		N/A
	General requirements	(See separate test report)	N/A
K	SAFETY INTERLOCKS		N/A
K.1	General requirements		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
K.2	Components of safety interlock safeguard mechanism	(See Annex G)	N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
	Compliance	(See appended table B.4)	N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Compliance and Test method		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements (type and circuit location)		N/A
K.7.2	Overload test. Current (A)		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test		N/A
L	DISCONNECT DEVICES		P
L.1	General requirements		P
L.2	Permanently connected equipment		N/A
L.3	Parts that remain energized		P
L.4	Single phase equipment	Appliance inlet	P
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices		N/A
L.8	Multiple power sources		P
M	EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS		P
M.1	General requirements		P
M.2	Safety of batteries and their cells		P
M.2.1	Requirements		P
M.2.2	Compliance and test method (identify method) .. :		P
M.3	Protection circuits		P
M.3.1	Requirements		P
M.3.2	Tests		P
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery		P
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.3.3	Compliance	(See appended Tables and Annex M and M.4)	P
M.4	Additional safeguards for equipment containing secondary lithium battery		N/A
M.4.1	General		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Charging operating limits		N/A
M.4.2.2a)	Charging voltage, current and temperature	(See Table M.4)	--
M.4.2.2 b)	Single faults in charging circuitry	(See Annex B.4)	--
M.4.3	Fire Enclosure		N/A
M.4.4	Endurance of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation		N/A
M.4.4.3	Drop and charge/discharge function tests		N/A
	Drop		N/A
	Charge		N/A
	Discharge		N/A
M.4.4.4	Charge-discharge cycle test		N/A
M.4.4.5	Result of charge-discharge cycle test		N/A
M.5	Risk of burn due to short circuit during carrying		N/A
M.5.1	Requirement		N/A
M.5.2	Compliance and Test Method (Test of P.2.3)		N/A
M.6	Prevention of short circuits and protection from other effects of electric current		P
M.6.1	Short circuits	Certified coin battery.	P
M.6.1.1	General requirements		P
M.6.1.2	Test method to simulate an internal fault	Certified coin battery.	P
M.6.1.3	Compliance (Specify M.6.1.2 or alternative method)		N/A
M.6.2	Leakage current (mA)		N/A
M.7	Risk of explosion from lead acid and NiCd batteries	Not lead acid or NiCd battery.	N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
M.7.2	Compliance and test method		N/A
M.8	Protection against internal ignition from external spark sources of lead acid batteries	Not such battery.	N/A
M.8.1	General requirements		N/A
M.8.2	Test method		N/A
M.8.2.1	General requirements		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.8.2.2	Estimation of hypothetical volume V_z (m ³ /s)..... :		--
M.8.2.3	Correction factors..... :		--
M.8.2.4	Calculation of distance d (mm) :		--
M.9	Preventing electrolyte spillage		N/A
M.9.1	Protection from electrolyte spillage		N/A
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse (Determination of compliance: inspection, data review; or abnormal testing) :		P
N	ELECTROCHEMICAL POTENTIALS		N/A
	Metal(s) used :	Pollution degree considered	--
O	MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES		N/A
	Figures O.1 to O.20 of this Annex applied..... :		--
P	SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS		P
P.1	General requirements		P
P.2.2	Safeguards against entry of foreign object		P
	Location and Dimensions (mm) :	Within the projected volume as depicted in Figure P.3, there are no bare conductive parts of ES3 or PS3 circuits	--
P.2.3	Safeguard against the consequences of entry of foreign object		N/A
P.2.3.1	Safeguards against the entry of a foreign object		N/A
	Openings in transportable equipment		N/A
	Transportable equipment with metalized plastic parts :		N/A
P.2.3.2	Openings in transportable equipment in relation to metallized parts of a barrier or enclosure (identification of supplementary safeguard) :		N/A
P.3	Safeguards against spillage of internal liquids	No internal liquid.	N/A
P.3.1	General requirements		N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Safeguards effectiveness		N/A
P.4	Metallized coatings and adhesive securing parts		N/A
P.4.2 a)	Conditioning testing		N/A
	T _c (°C)..... :		--
	T _r (°C) :		--
	T _a (°C)..... :		--

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
P.4.2 b)	Abrasion testing		N/A
P.4.2 c)	Mechanical strength testing		N/A
Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING		P
Q.1	Limited power sources		P
Q.1.1 a)	Inherently limited output		N/A
Q.1.1 b)	Impedance limited output		P
	- Regulating network limited output under normal operating and simulated single fault condition		N/A
Q.1.1 c)	Overcurrent protective device limited output		N/A
Q.1.1 d)	IC current limiter complying with G.9		N/A
Q.1.2	Compliance and test method		P
Q.2	Test for external circuits – paired conductor cable		N/A
	Maximum output current (A)		--
	Current limiting method		--
R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General requirements		N/A
R.2	Determination of the overcurrent protective device and circuit		N/A
R.3	Test method Supply voltage (V) and short-circuit current (A).		N/A
S	TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W	Not used.	N/A
	Samples. material		--
	Wall thickness (mm)		--
	Conditioning (°C)		--
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples. material		--
	Wall thickness (mm)		--
	Conditioning (°C)		--
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	Test specimen does not show any additional hole		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
S.3	Flammability test for the bottom of a fire enclosure		N/A
	Samples. material		--
	Wall thickness (mm)		--
	Cheesecloth did not ignite		N/A
S.4	Flammability classification of materials		N/A
S.5	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples. material		--
	Wall thickness (mm)		--
	Conditioning (test condition). (°C)		--
	Test flame according to IEC 60695-11-20 with conditions as set out		N/A
	After every test specimen was not consumed completely		N/A
	After fifth flame application. flame extinguished within 1 min		N/A
T	MECHANICAL STRENGTH TESTS		P
T.1	General requirements		P
T.2	Steady force test. 10 N		P
T.3	Steady force test. 30 N		N/A
T.4	Steady force test. 100 N		N/A
T.5	Steady force test. 250 N	(See appended table T5)	P
T.6	Enclosure impact test	(See appended table T6)	P
	Fall test		P
	Swing test		P
T.7	Drop test		N/A
T.8	Stress relief test	(See appended table T8)	N/A
T.9	Impact Test (glass)		N/A
T.9.1	General requirements		N/A
T.9.2	Impact test and compliance		N/A
	Impact energy (J)		--
	Height (m)		--
T.10	Glass fragmentation test		N/A
T.11	Test for telescoping or rod antennas	No such part.	N/A
	Torque value (Nm)		--

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
U	MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION		N/A
U.1	General requirements	No such part.	N/A
U.2	Compliance and test method for non-intrinsically protected CRTs		N/A
U.3	Protective Screen.....:		N/A
V	DETERMINATION OF ACCESSIBLE PARTS (FINGERS. PROBES AND WEDGES)		P
V.1	Accessible parts of equipment		P
V.2	Accessible part criterion		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.1.2	TABLE: List of critical components					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹	
Metal enclosure	Interchangeable	Interchangeable	Metal (Steel), thickness 0.8 mm minimum. See Enclosure Miscellaneous 4- 01(for model DS- A72024R- ICVS/P)&4-02(for model DS- A72036R-ICVS/P) for dimension details.	IEC/EN 62368- 1:2014 EN 62368- 1:2014+A11:2017	Test with appliance	
Plastic Enclosure Part	Interchangeable	Interchangeable	Min HB	UL94, UL746C	UL, --	
Internal Plastic Parts Materials	Interchangeable	Interchangeable	Min. V-2, or Min. HF-2.	UL94, UL746C	UL, --	
Internal Plastic Parts Materials (Alternate)	Interchangeable	Interchangeable	Min. HB or HBF, when foamed plastic parts are separated from electrical parts (other than insulated wires and cables) by at least 13mm of air or by a solid barrier of V-1 class material.	UL94, UL746C	UL, --	
Internal Plastic Parts Materials (Alternate)	--	--	Flammability level is ignored, when small parts (Max. 4g or Max. 1750mm ³) are mounted on V-1 class material.	--	-- , --	

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Power Supply Module (for model DS- A72024R-ICVS/P)	AcBel Polytech Inc	R1CA2551K	AC INPUT: 100-240V~, 50/60Hz, 7.0-3.5A; DC OUTPUT: 12V, 45.8A; 12Vsb, 3A, TOTAL POWER 550W MAX	UL 60950-1, IEC 60950-1, UL 62368-1, IEC 62368-1	UL , CB by TUV Rheinland (Certificate no.:JPTUV-079938) for IEC 60950-1, CB by TUV Rheinland (Certificate no.:JPTUV-093176, 093177) for IEC 62368-1
Power Supply Module ((for model DS-A72036R-ICVS/P)	AcBel Polytech Inc	R1CA2801A	AC INPUT: 100-127V~, 50/60Hz, 10A; 200-240V~, 50/60Hz, 5A; DC OUTPUT: 12V, 66.7A; 12Vsb, 3A TOTAL POWER 800W MAX	UL 60950-1, IEC 60950-1, UL 62368-1, IEC 62368-1	UL, CB by TUV Rheinland (Certificate no.: JPTUV-064215) for IEC 60950-1, CB by TUV Rheinland (Certificate no.: JPTUV-JPTUV-094095, 094096) for IEC 62368-1
HDD(optional)	Interchangeable	Interchangeable	12Vdc, 0.99A ,5Vdc, 0.85A maximum.	IEC/EN 62368-1:2014 EN 62368-1:2014+A11:2017	Test with appliance
Printed Wiring Board (PWB)	Interchangeable	Interchangeable	Minimum V-1, 105 degree C minimum.	UL 796	UL, --
Power Supply Cord (Optional)	Interchangeable	Interchangeable	Detachable, Min.1.5m, 16 AWG Min. Type SVT or SJT or SPT-2 or NISPT-2 flexible cord; rated Min. 250V, if one end terminated in NEMA 6-15P, the other end in an appliance coupler.	UL 817	UL, --

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Connectors and Receptacles (Secondary ES1 circuits) (alternate)	Interchangeable	Metal/Plastic	Metal/ Copper alloy pins housed in bodies of plastic rated Min. V-2.	UL 94, UL 746C	UL, --
Connectors and Receptacles (Secondary ES1 circuits) (alternate)	Interchangeable	Interchangeable	--	UL 1863	UL, --
09b. Connectors and Receptacles (Secondary ES1 circuits)(Alternate)	--	--	Flammability level is ignored, when small parts (Max. 4g or Max. 1750mm ³) are mounted on V-1 class material.	--	-- , --
Connectors and Receptacles (Secondary ES1 circuits)(Alternate)	--	--	Flammability level is ignored, when small parts (Max. 4g or Max. 1750mm ³) are separated from electrical parts (other than insulated wires and cables) by at least 13mm of air or by a solid barrier of V-1 class material.	--	-- , --
Interconnecting Cable (optional)	Interchangeable	Interchangeable	Suitable for external use, 3.05m maximum in length. VW-1, 30V minimum, 60 degree C minimum	UL 758, IEC 60332, IEC 60695-11-21	UL, --
Interconnecting Cable (optional)	Interchangeable	Interchangeable	Suitable for external use. Type CMP, CMR, CMG, or CM. For type CMX, or CMUC, maximum 3.05m long.	UL 444	UL, --
Insulating Tubing/ Sleeveing(optional)	Interchangeable	Interchangeable	Marked VW-1, 105 degree C minimum,	UL758	UL, --

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
Internal Wiring Secondary ES1 circuits)	Interchangeable	Interchangeable	Marked VW-1, minimum 30 V, 60 degree C	UL 758, IEC 60332, IEC 60695-11-21	UL, --
RTC Battery	Tohoku Murata Manufacturing Co Ltd	CR2032	Max Abnormal Charging Current 10mA, Max Abnormal Charging Voltage 12V dc	UL1642	UL (MH21566) , --
System Fan, three provided	DELTA ELECTRONICS INC	DBPJ1238B2FP 007	12V DC, 1.7(2.0 MAX) A, 199.13(179.22 MIN) CFM	UL 507	UL
Fan located on connector board for HDDs, one provided	DONGGUAN PROTECHNIC ELECTRIC CO LTD	MGA4012LB-O15	12V DC, 0.09A, 6.15CFM	UL 507, EN 60950-1: 2006/A2: 2013	UL CERTIFICATIO NO: B140931023 119 BY TUV SUD
CPU Fan on mainboard	ASIA VITAL COMPONENTS CO., LTD.	AFB0612EH	12V DC, 0.48A, 38.35CFM	UL 507, EN 60950-1: 2006/A2: 2013	UL, Certified by VDE
Heatsink on HDD board	--	--	Aluminum alloy or Copper alloy. See Enclosure Diagram 4-03 for dimension details.	IEC/EN 62368-1:2014 EN 62368-1:2014+A11:2017	Test with appliance
Heatsink on mainboard	--	--	Aluminum alloy and Copper alloy. See Enclosure Diagram 4-04 for dimension details.	IEC/EN 62368-1:2014 EN 62368-1:2014+A11:2017	Test with appliance
Optical Module Optional)	Interchangeable	Interchangeable	Laser Class I product.	UL 60950-1, UL 62368-1, IEC/EN 60950-1, IEC/EN 62368-1	UL, CB by NCB
Supplementary information:					
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					
2) Description line content is optional. Main line description needs to clearly detail the component used for testing					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.8.4, 4.8.5	TABLE: Lithium coin/button cell batteries mechanical tests			N/A
(The following mechanical tests are conducted in the sequence noted.)				
4.8.4.2	TABLE: Stress Relief test			—
Part		Material	Oven Temperature (°C)	Comments
--		--	--	--
4.8.4.3	TABLE: Battery replacement test			—
Battery part no.:			BATTERY1	—
Battery Installation/withdrawal			Battery Installation/Removal Cycle	Comments
Battery compartment			1	--
			2	--
			3	--
			4	--
			5	--
			6	--
			7	--
			8	--
			9	--
4.8.4.4	TABLE: Drop test			—
Impact Area		Drop Distance	Drop No.	Observations
			1	
			2	
			3	
4.8.4.5	TABLE: Impact			—
Impacts per surface		Surface tested	Impact energy (Nm)	Comments
--		--	--	--
--		--	--	--
--		--	--	--
4.8.4.6	TABLE: Crush test			—
Test position		Surface tested	Crushing Force (N)	Duration force applied (s)
Supplementary information:				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.8.5	TABLE: Lithium coin/button cell batteries mechanical test result			P
Test position	Surface tested	Force (N)	Duration force applied (s)	
--	--	--	--	
--	--	--	--	
--	--	--	--	
Supplementary information:				

5.2		Table: Classification of electrical energy sources					N/A
5.2.2.2 – Steady State Voltage and Current conditions							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				U (Vrms or Vpk)	I (A _{pk} or A _{rms})	Hz	
1.	--	--	Normal	--	--	--	--
			Abnormal-opening block	--	--	--	
			Single fault – Earth OC	--	--	--	
5.2.2.3 - Capacitance Limits							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters		ES Class	
				Capacitance, nF	Upk (V)		
1	--	--	Normal	--	--	--	
			Abnormal	--	--		
			Single fault – SC/OC	--	--		
5.2.2.4 - Single Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Duration (ms)	Upk (V)	l _{pk} (mA)	
			Normal				
			Abnormal				
			Single fault – SC/OC				
5.2.2.5 - Repetitive Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Off time (ms)	Upk (V)	l _{pk} (mA)	
			Normal				
			Abnormal				

IEC 62368-1							
Clause	Requirement + Test			Result - Remark			Verdict
			Single fault – SC/OC				
Test Conditions: Normal – Abnormal - Supplementary information: SC=Short Circuit, OC=Short Circuit							

IEC 62368-1							
Clause	Requirement + Test			Result - Remark			Verdict
5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements						P
	Supply voltage (V)	90Va.c./ 60Hz	264Va.c./ 50Hz	--	--	--	—
	Ambient T _{min} (°C)	25,0	25,0	--	--	--	—
	Ambient T _{max} (°C)	25,0	25,0	--	--	--	—
	Tma (°C)	40,0	40,0	--	--	--	—
Maximum measured temperature T of part/at:		T (°C)					Allowed T _{max} (°C)
Model: DS-A72024R-ICVS		--	--	--	--	--	--
PWB near HS2 (Q11)		65,9	63,3	--	--	--	105
T1 primary winding		61,5	61,2	--	--	--	110
T1 core		62,2	61,5	--	--	--	110
T2 primary winding		44,1	44,2	--	--	--	110
T2 core		46,9	46,9	--	--	--	110
T5 primary winding		51,4	51,0	--	--	--	110
T101 primary winding		57,3	55,8	--	--	--	110
T102 primary winding		60,7	60,2	--	--	--	110
L5 coil		73,8	56,9	--	--	--	130
AC inlet		46,7	45,9	--	--	--	70
Internal wiring near PSU		46,2	46,3	--	--	--	80
PWB near U62 of mainboard		48,2	48,3	--	--	--	105
Battery body		47,4	47,5	--	--	--	105
PWB near CPU0		53,0	53,1	--	--	--	105
PWB near CPU1		49,4	49,4	--	--	--	105
PWB near USB port		50,5	50,6	--	--	--	105
PWB near Fans		47,9	48,0	--	--	--	105
PWB center (Network card)		47,4	47,5	--	--	--	105
PWB board for Power Button		43,6	43,7	--	--	--	105
Plastic Handle of PSU*		36,5	33,9	--	--	--	77
Metal enclosure near ventilated opening*		35,0	35,0	--	--	--	60
Metal enclosure upper the SSDs*		28,1	28,2	--	--	--	60
Metal enclosure upon the CPU*		31,8	31,8	--	--	--	60
Metal enclosure near the PSU*		31,4	31,1	--	--	--	60
Plastic enclosure of Power Button*		27,6	27,7	--	--	--	77
Supplementary information:							

IEC 62368-1							
Clause	Requirement + Test			Result - Remark			Verdict
Temperature T of winding:	t ₁ (°C)	R ₁ (Ω)	t ₂ (°C)	R ₂ (Ω)	T (°C)	Allowed T _{max} (°C)	Insulation class
--	--	--	--	--	--	--	--
Supplementary information: Note 1: Tma should be considered as directed by applicable requirement Note 2: Tma is not included in assessment of Touch Temperatures (Clause 9) * The test results of touchable surface temperature were considered base on ambient temperature 25°C, Other temperture point list in this table has shifted to Tma							

IEC 62368-1								
Clause	Requirement + Test			Result - Remark			Verdict	
5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements						P	
		Supply voltage (V)	90Va.c./ 60Hz	139Va.c./ 60Hz	180V a.c./ 60Hz	264Va. c./60Hz	--	—
		Ambient T _{min} (°C)	25,0	25,0	25,0	25,0	--	—
		Ambient T _{max} (°C)	25,0	25,0	25,0	25,0	--	—
		T _{ma} (°C)	40,0	40,0	40,0	40,0	--	—
Maximum measured temperature T of part/at:		T (°C)					Allowed T _{max} (°C)	
Model: DS-A72036R-ICVS		--	--	--	--	--	--	
AC inlet		47,8	46,5	46,5	46,2	--	70	
T201 primary winding		45,5	45,3	45,5	45,5	--	110	
T201 core		45,2	44,9	45,2	45,1	--	110	
T401 primary winding		73,3	72,8	73,0	72,6	--	110	
T401 core		59,7	59,3	59,4	59,1	--	110	
T5 primary winding		47,6	47,2	47,3	47,3	--	110	
L5 coil		56,6	56,4	56,4	56,2	--	130	
PCB near HS1 (BD1)		68,1	67,0	66,9	66,4	--	105	
Internal wiring		44,6	44,5	44,6	44,6	--	80	
PWB near U62 of mainboard		46,7	46,6	46,7	43,5	--	105	
Battery body		45,1	45,0	45,2	45,1	--	105	
PWB near Battery body		40,0	40,1	40,1	40,2	--	105	
PWB near CPU		48,8	48,6	48,8	48,8	--	105	
PWB near USB port		47,7	47,5	47,7	47,6	--	105	
PWB near Fans		45,1	45,0	45,2	45,1	--	105	
PWB center (Network card)		45,0	44,8	45,0	44,8	--	105	
PWB board for Power Button		41,3	41,2	41,3	41,1	--	105	
Plastic Handle of PSU		37,1	34,4	33,8	33,1	--	77	
Metal enclosure near ventilated opening		33,4	33,3	33,4	33,3	--	60	
Metal enclosure upper the SSDs		26,0	26,0	26,0	25,9	--	60	
Metal enclosure upon the CPU		29,2	29,1	29,2	29,2	--	60	
Metal enclosure near the PSU		29,1	28,9	29,0	29,0	--	60	
Plastic enclosure of Power Button		25,1	25,4	25,2	25,0	--	77	
Supplementary information:								
Temperature T of winding:		t ₁ (°C)	R ₁ (Ω)	t ₂ (°C)	R ₂ (Ω)	T (°C)	Allowed T _{max} (°C)	Insulation class

IEC 62368-1							
Clause	Requirement + Test			Result - Remark			Verdict
--	--	--	--	--	--	--	--
Supplementary information: Note 1: Tma should be considered as directed by applicable requirement Note 2: Tma is not included in assessment of Touch Temperatures (Clause 9) * The test results of touchable surface temperature were considered base on ambient temperature 25°C, Other temperture point list in this table has shifted to Tma							

5,4,1,10,2	TABLE: Vicat softening temperature of thermoplastics		N/A
Penetration (mm)..... :			—
Object/ Part No./Material	Manufacturer/t rademark	T softening (°C)	
--	--	--	
--	--	--	
--	--	--	
Supplementary information:			

5,4,1,10,3	TABLE: Ball pressure test of thermoplastics			N/A
Allowed impression diameter (mm) :		≤ 2 mm		—
Object/Part No./Material	Manufacturer/trademark	Test temperature (°C)	Impression diameter (mm)	
--	--	--	--	
Supplementary information:				

5,4,2,2, 5,4,2,4 and 5,4,3	TABLE: Minimum Clearances/Creepage distance						N/A	
Clearance (cl) and creepage distance (cr) at/of/between:		Up (V)	U r,m,s, (V)	Frequenc y (kHz) ¹	Required cl (mm)	cl (mm) ²	Required ³ cr (mm)	cr (mm)
Basic/supplementary:								
--		--	--	--	--	--	--	--
Reinforced:								
--		--	--	--	--	--	--	--
Supplementary information:								

5,4,2,3	TABLE: Minimum Clearances distances using required withstand voltage					N/A	
	Overvoltage Category (OV):					II	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Pollution Degree:		2
Clearance distanced between:	Required withstand voltage	Required cl (mm)	Measured cl (mm)
Basic/supplementary:			
--	--	--	--
Reinforced:			
Supplementary information:			

5,4,2,4	TABLE: Clearances based on electric strength test			N/A
Test voltage applied between:		Required cl (mm)	Test voltage (kV) peak/ r,m,s, / d,c,	Breakdown Yes / No
--		--	--	--
--		--	--	--
--		--	--	--
Supplementary information:				

5,4,4,2, 5,4,4,5 c) 5,4,4,9	TABLE: Distance through insulation measurements					N/A
Distance through insulation di at/of:	Peak voltage (V)	Frequency (kHz)	Material	Required DTI (mm)	DTI (mm)	
--	--	--	--	--	--	
Supplementary information:						
1) For details refer to appended table 4.1.2.						

5,4,9	TABLE: Electric strength tests			P
Test voltage applied between:		Voltage shape (AC, DC)	Test voltage (V)	Breakdown Yes / No
Functional:				
--	--	--	--	
Basic/supplementary:				
Model: DS-A72024R-ICVS	--	--	--	
Primary to Earth (metal enclosure)	DC	2500V	No	
Model: DS-A72036R-ICVS	--	--	--	
Primary to Earth (metal enclosure)	DC	2500V	No	
Reinforced:				
Model: DS-A72024R-ICVS	--	--	--	

IEC 62368-1				
Clause	Requirement + Test	Result - Remark	Verdict	
5,4,9	TABLE: Electric strength tests		P	
Test voltage applied between:		Voltage shape (AC, DC)	Test voltage (V)	Breakdown Yes / No
Primary to secondary port		DC	4242	No
Model: DS-A72036R-ICVS		--	--	--
Primary to secondary port		DC	4242	No
Routine Tests:				
--		--	--	--
Supplementary information:				

5,5,2,2	TABLE: Stored discharge on capacitors					N/A
Supply Voltage (V), Hz	Test Location	Operating Condition (N, S)	Switch position On or off	Measured Voltage (after 2 seconds)	ES Classification	
--	--	--	--	--	--	
Supplementary information: refer to table 4.1.2						
X-capacitors installed for testing are:						
<input type="checkbox"/> bleeding resistor rating:						
<input type="checkbox"/> ICX:						
Notes:						
A, Test Location:						
Phase to Neutral; Phase to Phase; Phase to Earth; and/or Neutral to Earth						
B, Operating condition abbreviations:						
N – Normal operating condition (e.g., normal operation, or open fuse); S –Single fault condition						

5,6,6,2	TABLE: Resistance of protective conductors and terminations				P
Accessible part		Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)
Model: DS-A72024R-ICVS		--	--	--	--
Metal enclosure		40	2	1,02	0,0255
Model: DS-A72036R-ICVS		--	--	--	--
Earth pin of AC Inlet to metal enclosure farthest		40	2	1,04	0,0260
Supplementary information:					

5,7,2,2, 5,7,4	TABLE: Earthed accessible conductive part		P
Supply voltage	264V	—	
Location	Test conditions specified in 6,1 of IEC 60990 or Fault Condition No	Touch current	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
		in IEC 60990 clause 6,2,2,1 through 6,2,2,8, except for 6,2,2,7	(mA)
Metal enclosure for Model: DS-A72024R-ICVS/P with PSU(R1CA2551K)		1	Normal: 0,9480mA _{pk} Reverse: 0,928 2mA _{pk}
		2*	-
		3	-
		4	-
		5	-
		6	-
		8	-
Metal enclosure for Model: DS-A72036R-ICVS/P with PSU(R1CA2801A)		1	Normal: 1,2726 mA _{pk} Reverse: 1,287 4mA _{pk}
		2*	-
		3	-
		4	-
		5	-
		6	-
		8	-
Supplementary Information:			
Notes:			
[1] Supply voltage is the anticipated maximum Touch Voltage			
[2] Earthed neutral conductor [Voltage differences less than 1% or more]			
[3] Specify method used for measurement as described in IEC 60990 sub-clause 4,3			
[4] IEC60990, sub-clause 6,2,2,7, Fault 7 not applicable,			
[5] (*) IEC60990, sub-clause 6,2,2,2 is not applicable if switch or disconnect device (e.g., appliance coupler) provided,			
1) Worst case of normal and reverse condition.			

6,2,2	Table: Electrical power sources (PS) measurements for classification				P
Source	Description	Measurement	Max Power after 3 s	Max Power after 5 s ^{*)}	PS Classification
Input	--	Power (W) :	--	--	PS3 without test
		V _A (V) :	--	--	
		I _A (A) :	--	--	
USB upper port Of model DSA72048RICVS	Normal	Power (W) :	12,6	--	PS1
		V _A (V) :	5Vd.c.	--	
		I _A (A) :	2,53	--	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary Information:
(*) Measurement taken only when limits at 3 seconds exceed PS1 limits
SC: Short circuit

6,2,3,1	Table: Determination of Potential Ignition Sources (Arcing PIS)				P
Location	Open circuit voltage After 3 s (V _p)	Measured r,m,s current (I _{rms})	Calculated value (V _p x I _{rms})	Arcing PIS? Yes / No	
Primary circuit	--	--	--	Yes	
Supplementary information:					
All primary circuits are considered as Arcing PIS without test,					
An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V _p) and normal operating condition rms current (I _{rms}) is greater than 15,					

6,2,3,2	Table: Determination of Potential Ignition Sources (Resistive PIS)				P
Circuit Location (x-y)	Operating Condition (Normal / Describe Single Fault)	Measured wattage or VA During first 30 s (W / VA)	Measured wattage or VA After 30 s (W / VA)	Protective Circuit, Regulator, or PTC Operated? Yes / No (Comment)	Resistive PIS? Yes/No
All internal circuits	--	--	--	--	Yes
Supplementary Information:					
A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter,					
If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification,					
A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, <u>or</u> (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault,					

8,5,5	TABLE: High Pressure Lamp		N/A
Description	Values	Energy Source Classification	
Lamp type		—	
Manufacturer		—	
Cat no,		—	
Pressure (cold) (MPa).....		MS_	
Pressure (operating) (MPa)		MS_	
Operating time (minutes)		—	
Explosion method		—	
Max particle length escaping enclosure (mm) .:		MS_	
Max particle length beyond 1 m (mm).....		MS_	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Overall result			
Supplementary information:			

B,2,5	TABLE: Input test							P
U (V)	Hz	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
Model: DS-A72024R-ICVS Condition 1: Testing with one PSUs								
90 V a.c.	50Hz	5,601	--	500,2	--	F1	5,601	Max normal load
90 V a.c.	60Hz	5,631	--	504,6	--	F1	5,631	Max normal load
100 V a.c.	50Hz	4,955	7,0	494,5	--	F1	4,955	Max normal load
100 V a.c.	60Hz	4,987	7,0	496,3	--	F1	4,987	Max normal load
240 V a.c.	50Hz	2,038	3,5	483,2	--	F1	2,038	Max normal load
240 V a.c.	60Hz	2,035	3,5	482,9	--	F1	2,035	Max normal load
264 V a.c.	50Hz	1,864	--	486,0	--	F1	1,864	Max normal load
264 V a.c.	60Hz	1,865	--	485,2	--	F1	1,865	Max normal load
Model: DS-A72036R-ICVS Condition 1: Testing with one PSUs								
90 V a.c.	50Hz	7,240	--	642,2	--	F1	7,240	Max normal load
90 V a.c.	60Hz	7,279	--	647,2	--	F1	7,279	Max normal load
100 V a.c.	50Hz	6,451	10,0	640,6	--	F1	6,451	Max normal load
100 V a.c.	60Hz	6,654	10,0	646,8	--	F1	6,654	Max normal load
127 V a.c.	50Hz	5,013	10,0	629,7	--	F1	5,013	Max normal load
127 V a.c.	60Hz	4,964	10,0	626,6	--	F1	4,964	Max normal load
139.7 V a.c.	50Hz	4,456	--	620,3	--	F1	4,456	Max normal load
139.7 V a.c.	60Hz	4,530	--	629,2	--	F1	4,530	Max normal load
180 V a.c.	50Hz	3,437	--	615,0	--	F1	3,437	Max normal load
180 V a.c.	60Hz	3,457	--	519,4	--	F1	3,457	Max normal load
200 V a.c.	50Hz	3,108	5,0	615,9	--	F1	3,108	Max normal load
200 V a.c.	60Hz	3,114	5,0	617,1	--	F1	3,114	Max normal load
240 V a.c.	50Hz	2,601	5,0	611,1	--	F1	2,601	Max normal load
240 V a.c.	60Hz	2,644	5,0	618,9	--	F1	2,644	Max normal load
264 V a.c.	50Hz	2,387	--	613,5	--	F1	2,387	Max normal load
Supplementary information:								
Equipment may be have rated current or rated power or both, Both should be measured;								
Condition1: Work normally, with USB 3.0 loaded 4.5W and USB 2.0 loaded 2.5W, Connected with HDMI port								

IEC 62368-1								
Clause	Requirement + Test				Result - Remark			Verdict
B,3	TABLE: Abnormal operating condition tests							P
Ambient temperature (°C)					25°C			—
Power source for EUT: Manufacturer, model/type, output rating .:					--			—
Component No,	Abnormal Condition	Supply voltage, (V)	Test time (ms)	Fuse no,	Fuse current, (A)	T-coupl e	Temp, (°C)	Observation
Model: DS-A72024R-ICVS								
All inflow exhaust openings	Cover	264Vac/60Hz	1h57min	--	1,888	K	Max temperature: T1 primary winding: 50,3°C; T1 core: 53,9°C; T2 primary winding: 25,5°C; T2 core: 33,9°C; Metal enclosure upon the CPU: 32,4°C; Ambient: 22,6°C	Sample works properly. NB.NF
USB	Overload	264Vac/60Hz	2h16min	--	1,869- >1,881- >1,840	K	Max temperature: T1 primary winding: 44,2°C; T1 core: 42,9°C; T2 primary winding: 46,3°C; T2 core: 27,8°C; Metal enclosure upon the CPU: 29,0°C; Ambient: 23,3°C	Work normally stable Load:2.470 shutdown ,NF,NB,IP
USB	SC	264Vac/60Hz	5min	--	1,839	--	--	The current decreases NF, NB
Model: DS-A72036R-ICVS								
All inflow exhaust openings	Cover	264Vac/60Hz	58min	--	2,531	K	Max temperature: T201 primary winding: 35,1°C; T201 core: 35,0°C; T401 primary winding: 70,8°C; T401 core: 54,8°C; Metal enclosure upon the CPU: 32,2°C; Ambient: 23,1°C	Sample works properly. NB.NF

IEC 62368-1								
Clause	Requirement + Test				Result - Remark			Verdict
B,3	TABLE: Abnormal operating condition tests							P
Ambient temperature (°C)					25°C			—
Power source for EUT: Manufacturer, model/type, output rating .:					--			—
Component No,	Abnormal Condition	Supply voltage, (V)	Test time (ms)	Fuse no,	Fuse current, (A)	T-couple	Temp, (°C)	Observation
USB	Overload	264Vac/60Hz	2h19min	--	2,431- >2,446- >2,377	K	Max temperature: T201 primary winding: 29,1°C; T201 core: 28,7°C; T401 primary winding: 56,6°C; T401 core: 43,0°C; Metal enclosure upon the CPU: 27,1°C; Ambient: 22,9°C	Work normally until stable Load:2.410 A shutdown, NF, NB, IP
USB	SC	264Vac/60Hz	5min	--	2,397	--	--	The current decreases NF,NB
Supplementary information: Test table is provided to record abnormal and fault conditions for all applicable energy sources including Thermal burn injury. Column “Abnormal/Fault.” Specify if test condition by indicating “Abnormal” then the condition for a Clause B.3 test or “Single Fault” then the condition for Clause B.4. 1) Both USB 3.0 ports in back sides with same results.								

B,4	TABLE: Fault condition tests							P
Ambient temperature (°C)					25°C			—
Power source for EUT: Manufacturer, model/type, output rating .:					--			—
Component No,	Fault Condition	Supply voltage, (V)	Test time (ms)	Fuse no,	Fuse current, (A)	T-couple	Temp, (°C)	Observation
Model: DS-A72024R-ICVS/P								
All system Fan+ SSD Fan	Blocked	264vac60hz	1h34min	--	1,419	K	Max temperature: T1 primary winding: 55,2°C; T1 core: 58,8°C; T2 primary winding: 27,2°C; T2 core: 44,5°C; Metal enclosure upon the CPU: 41,5°C; Ambient: 22,8°C	Sample works properly. NB.NF

IEC 62368-1								
Clause	Requirement + Test					Result - Remark		Verdict
All mainboard Fan	Blocked	264vac60hz	44min	--	1,820	K	Max temperature: T1 primary winding: 43,5°C; T1 core: 46,6°C; T2 primary winding: 28,3°C; T2 core: 30,0°C; Metal enclosure upon the CPU: 29,5°C; Ambient: 24,2°C	Sample works properly. NB.NF
All PSU Fan	Blocked	264vac60hz	41min	--	1,669	K	Max temperature: T1 primary winding: 47,5°C; T1 core: 53,1°C; T2 primary winding: 27,1°C; T2 core: 28,3°C; Metal enclosure upon the CPU: 27,7°C; Ambient: 22,9°C	Sample works properly. NB.NF
Model: DS-A72036R-ICVS								
two system Fan+ SSD Fan	Blocked	264vac60hz	1h20min	--	2,115	K	Max temperature: T201 primary winding: 38,7°C; T201 core: 29,5°C; T401 primary winding: 69,4°C; T401 core: 55,4°C; Metal enclosure upon the CPU: 34,1°C; Ambient: 22,7°C	Sample works properly. NB.NF
one system Fan+ SSD Fan	Blocked	264vac60hz	57min	--	2,336	K	Max temperature: T201 primary winding: 29,0°C; T201 core: 25,8°C; T401 primary winding: 55,3°C; T401 core: 42,6°C; Metal enclosure upon the CPU: 27,8°C; Ambient: 23,2°C	Sample works properly. NB.NF

IEC 62368-1								
Clause	Requirement + Test					Result - Remark		Verdict
All mainboard Fan	Blocked	264vac60hz	44min	--	2,417	K	Max temperature: T201 primary winding: 27,7°C; T201 core: 27,4°C; T401 primary winding: 54,2°C; T401 core: 41,1°C; Metal enclosure upon the CPU: 26,9°C; Ambient: 23,0°C	Sample works properly. NB.NF
All PSU Fan	Blocked	264vac60hz	43min	--	2,393	K	Max temperature: T201 primary winding: 27,7°C; T201 core: 27,4°C; T401 primary winding: 54,2°C; T401 core: 41,1°C; Metal enclosure upon the CPU: 26,9°C; Ambient: 23,0°C	Sample works properly. NB.NF
Light board (SC U1 pin 8 to pin7)	SC	264Vac, 50Hz	5mins	F1/no	0,22	--	--	Unit normal work NF, No significant temperature increase
Light board (SC U1 pin 8 to pin6)	SC	264Vac, 50Hz	5mins	F1/no	0,22	--	--	Unit normal work NF, No significant temperature increase
Light board (SC U1 pin 8 to pin5)	SC	264Vac, 50Hz	5mins	F1/no	0,22	--	--	Unit normal work NF, No significant temperature increase
Light board (SC U1 pin 8 to pin1)	SC	264Vac, 50Hz	5mins	F1/no	0,22	--	--	After SC, SW2 light keep lighting, and recoverable NF
Light board (SC U1 pin 8 to pin2)	SC	264Vac, 50Hz	5mins	F1/no	0,22	--	--	After SC, SW2 light keep lighting or shutdown, and recoverable NF

IEC 62368-1								
Clause	Requirement + Test					Result - Remark		Verdict
Light board (SC U1 pin 8 to pin4)	SC	264Vac, 50Hz	5mins	F1/no	0,22>> 0,26	--	--	After SC, SW1 and SW2 lights shutdown, current increases to 0.26. and recoverable. NF
Supplementary information:								

Annex M	TABLE: Batteries								N/A		
The tests of Annex M are applicable only when appropriate battery data is not available									N/A		
Is it possible to install the battery in a reverse polarity position?..... :								N/A		N/A	
	Non-rechargeable batteries			Rechargeable batteries							
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging			
	Meas, current	Manuf, Specs,		Meas, current	Manuf, Specs,	Meas, current	Manuf, Specs,	Meas, current	Manuf, Specs,		
Max, current during normal condition	--	--	--	--	--	--	--	--	--		
Max, current during fault condition	--	--	--	--	--	--	--	--	--		
Test results:									Verdict		
- Chemical leaks							No		P		
- Explosion of the battery							No		P		
- Emission of flame or expulsion of molten metal							No		P		
- Electric strength tests of equipment after completion of tests									N/A		
Supplementary information:											
There are two diodes and one 1K resistor in the RTC protective circuits, the un-intentional charging current will not exceed 10mA under any single fault condition.											

Annex M,4	Table: Additional safeguards for equipment containing secondary lithium batteries					N/A
Battery/Cell No,	Test conditions	Measurements			Observation	
		U	I (A)	Temp (C)		
	Normal					
	Abnormal					
	Single fault –SC/OC					

IEC 62368-1					
Clause	Requirement + Test		Result - Remark		Verdict
	Normal				
	Abnormal				
	Single fault – SC/OC				
Supplementary Information:					
Battery identification	Charging at T _{lowest} (°C)	Observation	Charging at T _{highest} (°C)	Observation	
Supplementary Information:					

Annex Q,1	TABLE: Circuits intended for interconnection with building wiring (LPS)					P
Note: Measured UOC (V) with all load circuits disconnected:						
Output Circuit	Components	U _{oc} (V)	I _{sc} (A)		S (VA)	
			Meas,	Limit	Meas,	Limit
Model: DS-A72024R-ICVS						
HDMI	--	0	0	8	0	100
USB-1	--	5,04	2,97	8	12,66	100
USB-2	--	5,04	2,98	8	12,82	100
IPM 1	--	0	0	8	0	100
IPM 2	--	0	0	8	0	100
IPM 3	--	0	0	8	0	100
SAS	--	0	0	8	0	100
Data LAN 1	--	0	0	8	0	100
Data LAN 2	--	0	0	8	0	100
Data LAN 3	--	0	0	8	0	100
Data LAN 4	--	0	0	8	0	100
Data LAN 5	--	0	0	8	0	100
Model: DS-A72036R-ICVS						
HDMI	--	0	0	8	0	100
USB-1	--	5,05	2,92	8	12,44	100
USB-2	--	5,05	2,92	8	12,56	100
IPM 1	--	0	0	8	0	100
IPM 2	--	0	0	8	0	100
IPM 3	--	0	0	8	0	100
SAS	--	0	0	8	0	100
Data LAN 1	--	0	0	8	0	100

IEC 62368-1						
Clause	Requirement + Test			Result - Remark		Verdict
Data LAN 2	--	0	0	8	0	100
Data LAN 3	--	0	0	8	0	100
Data LAN 4	--	0	0	8	0	100
Data LAN 5	--	0	0	8	0	100
Supplementary Information: SC=Short circuit,						

T,2, T,3, T,4, T,5	TABLE: Steady force test					P
Part/Location	Material	Thickness (mm)	Force (N)	Test Duration (sec)	Observation	
Top enclosure near PSU (for all PSUs)	Metal	0,8	250	5	No damage, No Cracking	
Side enclosure near PSU (for all PSUs)	Metal	0,8	250	5	No damage, No Cracking	
Bottom enclosure near PSU (for all PSUs)	Metal	0,8	250	5	No damage, No Cracking	
Top of Fans module	Metal	0,8	250	5	No damage, No Cracking	
All sides of Fans module	Metal	0,8	250	5	No damage, No Cracking	
Supplementary information:						

T,6, T,9	TABLE: Impact tests				P
Part/Location	Material	Thickness (mm)	Vertical distance (mm)	Observation	
Top enclosure near PSU (for all PSUs)	Metal	0,8	1300	No damage, No cracking	
Side enclosure near PSU (for all PSUs)	Metal	0,8	1300	No damage, No cracking	
Bottom enclosure near PSU (for all PSUs)	Metal	0,8	1300	No damage, No cracking	
Top of Fans module	Metal	0,8	1300	No damage, No cracking	
All sides of Fans module	Metal	0,8	1300	No damage, No cracking	
Supplementary information:					


IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

T,7	TABLE: Drop tests				N/A
Part/Location	Material	Thickness (mm)	Drop Height (mm)	Observation	
--	--	--	--	--	
Supplementary information:					

T,8	TABLE: Stress relief test					N/A
Part/Location	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation	
--	--	--	--	--	--	
Supplementary information: All the materials in table 4.1.2 with the same results.						

---End of Report---

Details of: Overall view for model DS-A72024R-ICVS

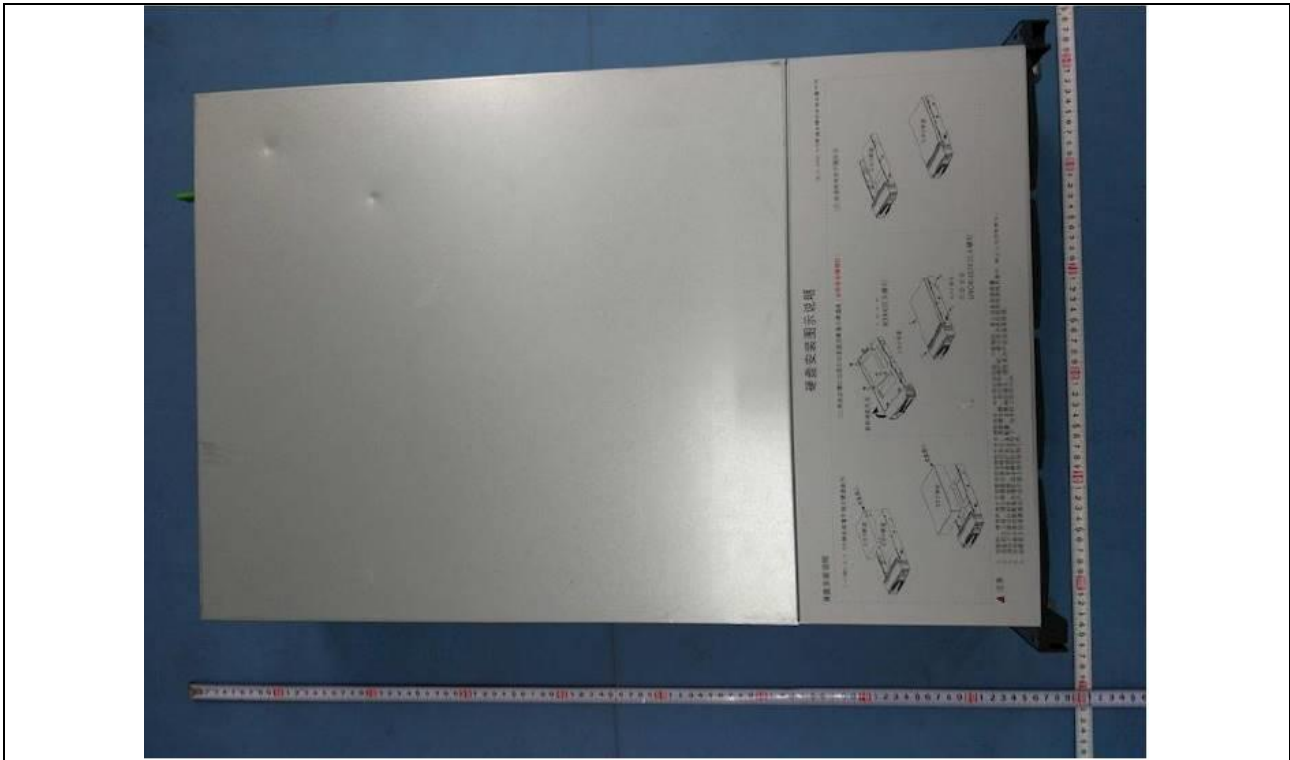

Details of: Overall view for model DS-A72024R-ICVS



Details of: Overall view for model DS-A72024R-ICVS



Details of: Overall view for model DS-A72024R-ICVS



Details of: Internal view for model DS-A72024R-ICVS



Details of: Internal view for model DS-A72024R-ICVS



Details of: Internal view for model DS-A72024R-ICVS




Details of: Mainboard view 1 for model DS-A72024R-ICVS




Details of: Mainboard view 2 for model DS-A72024R-ICVS



Details of: Internal board 1 view 1 for model DS-A72024R-ICVS

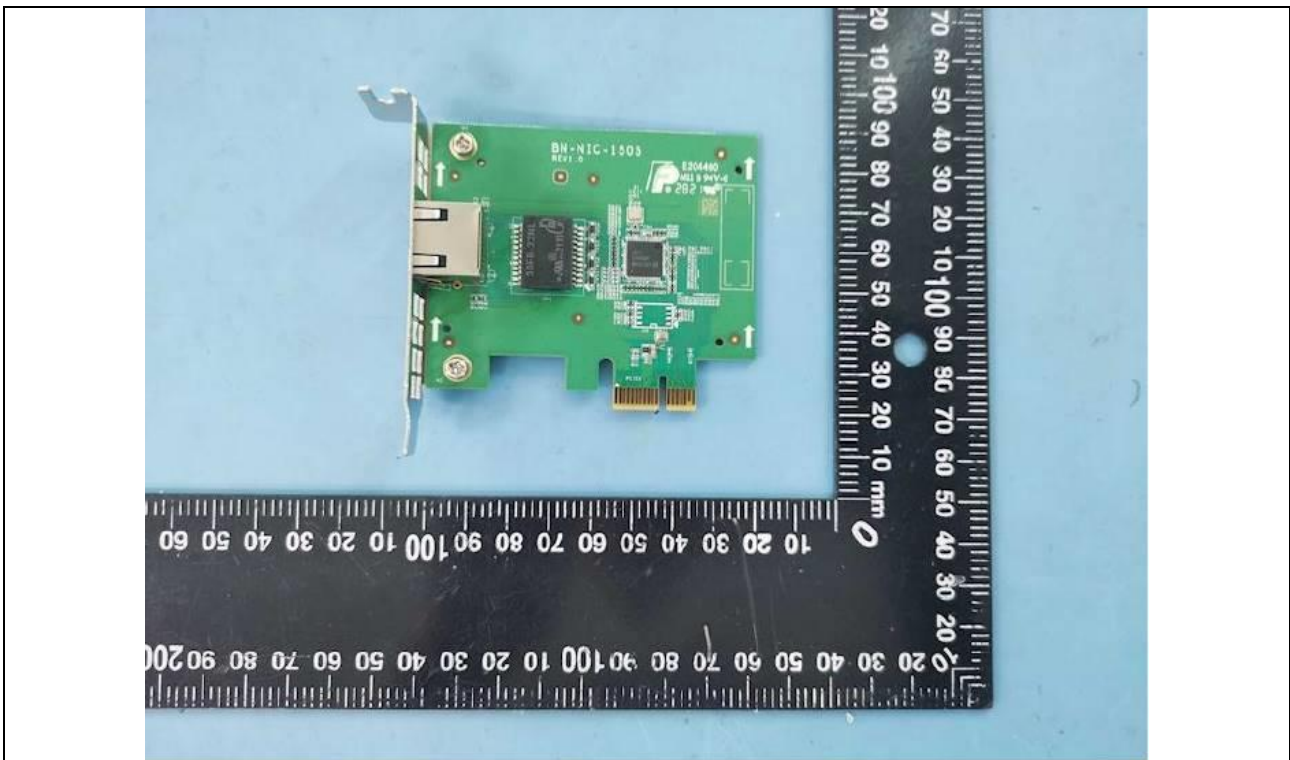

Details of: Internal board 1 view 2 for model DS-A72024R-ICVS

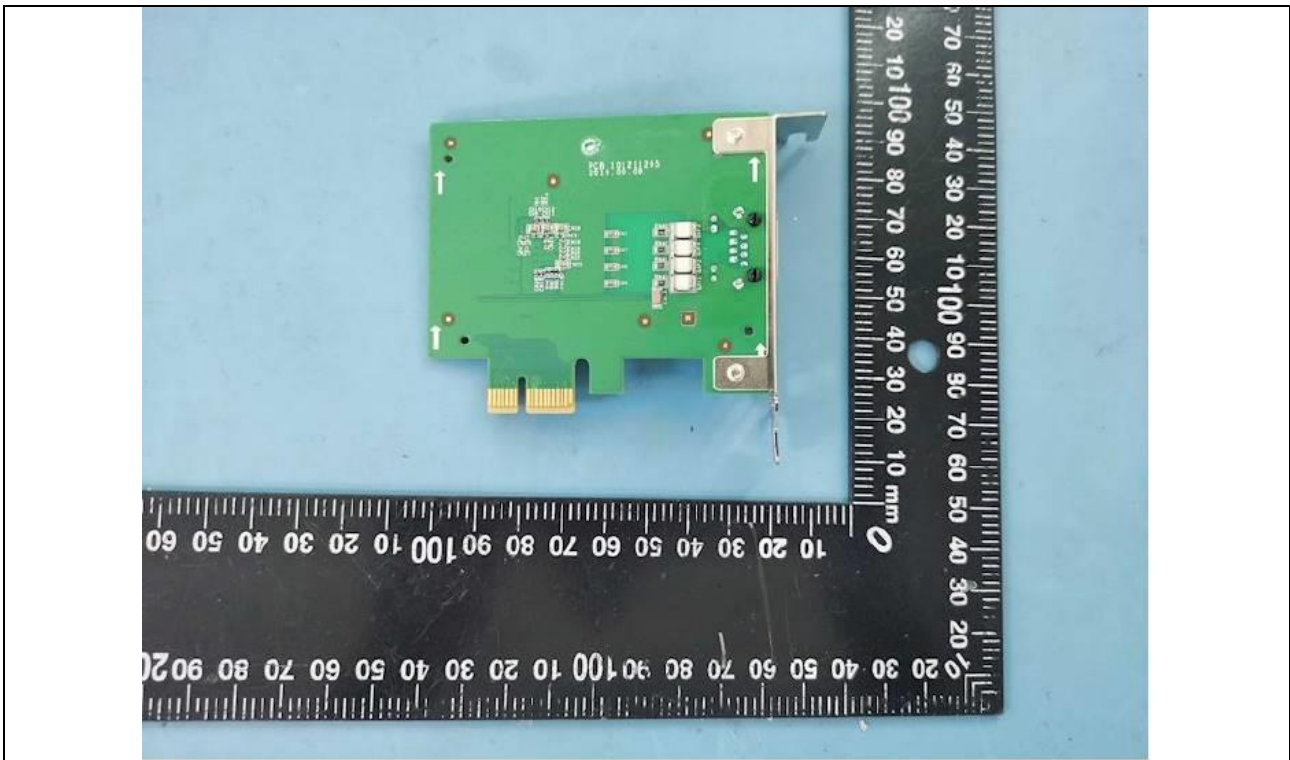

Details of: Internal board 2 view 1 for model DS-A72024R-ICVS




Details of: Internal board 2 view 2 for model DS-A72024R-ICVS




Details of: Internal board 3 view 1 for model DS-A72024R-ICVS



Details of: Internal board 3 view 2 for model DS-A72024R-ICVS

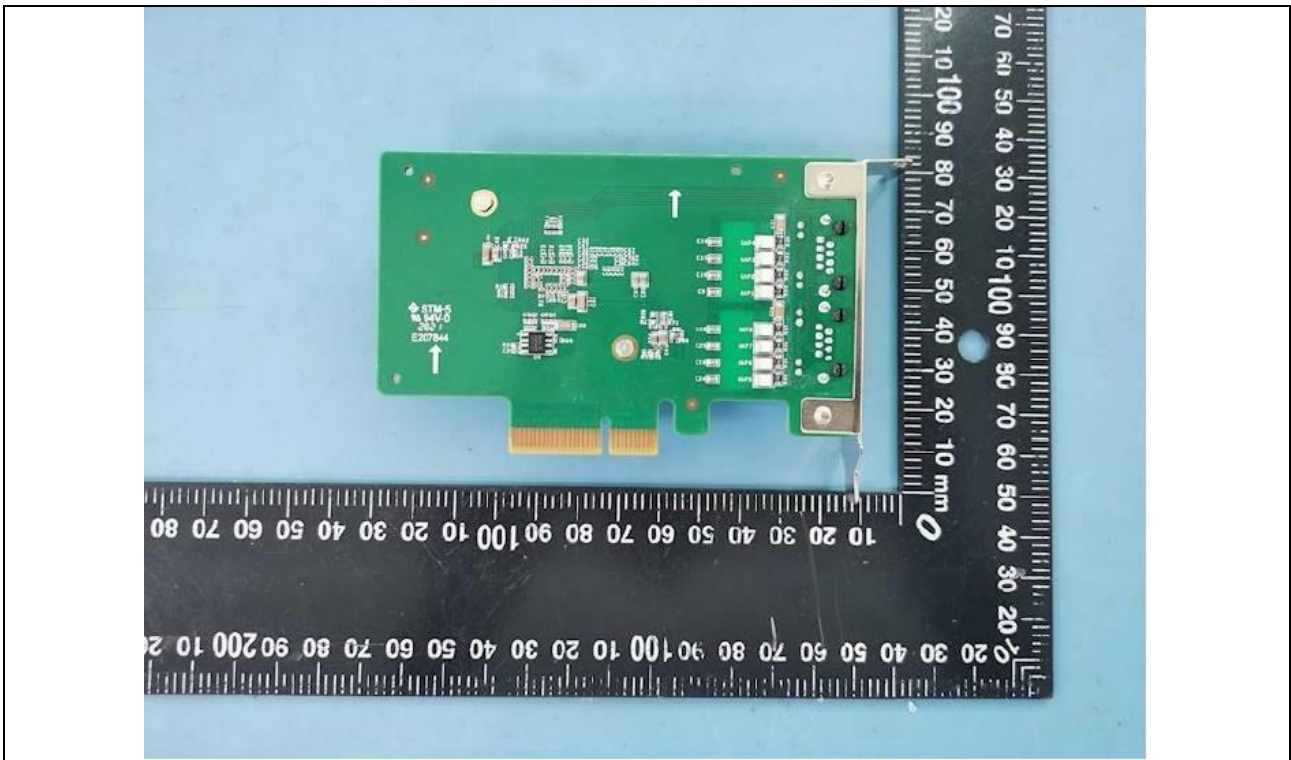


Details of: Internal board 4 view 1 for model DS-A72024R-ICVS

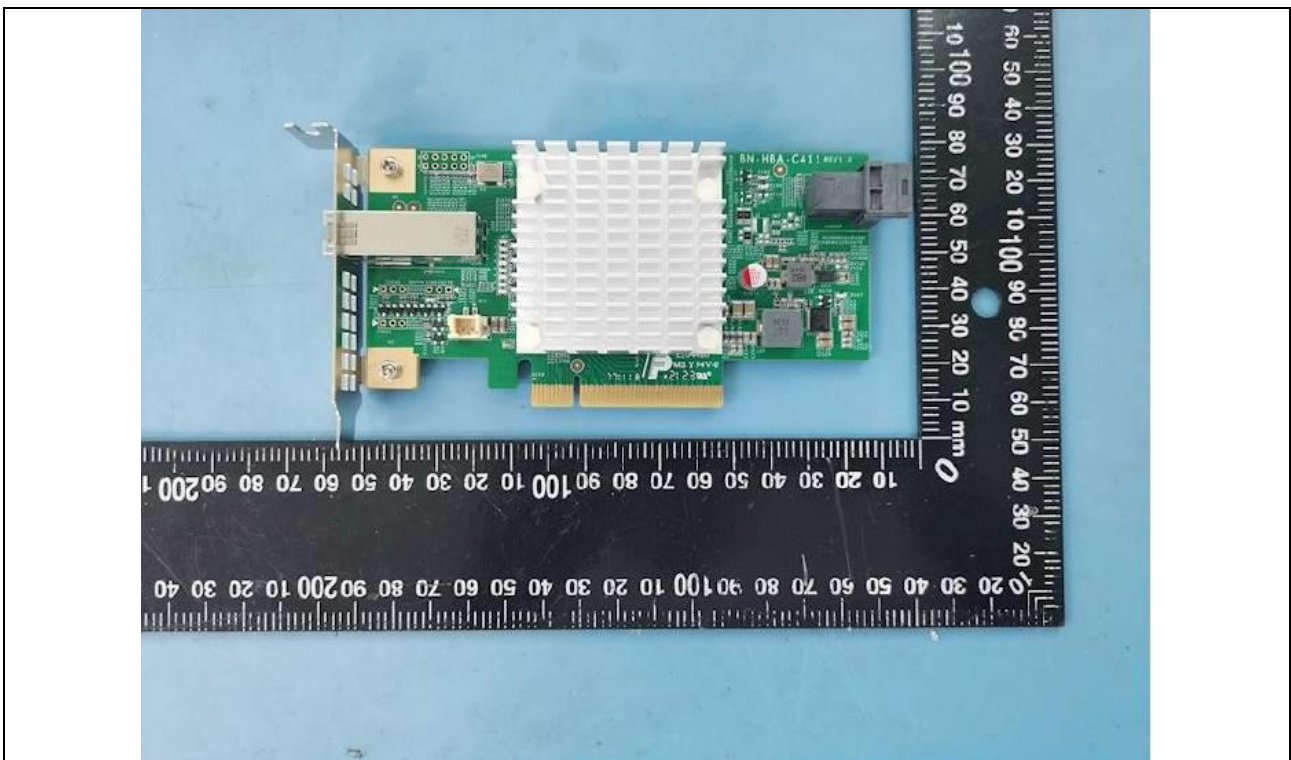


Details of: Internal board 4 view 2 for model DS-A72024R-ICVS




Details of: Internal board 5 view 1 for model DS-A72024R-ICVS

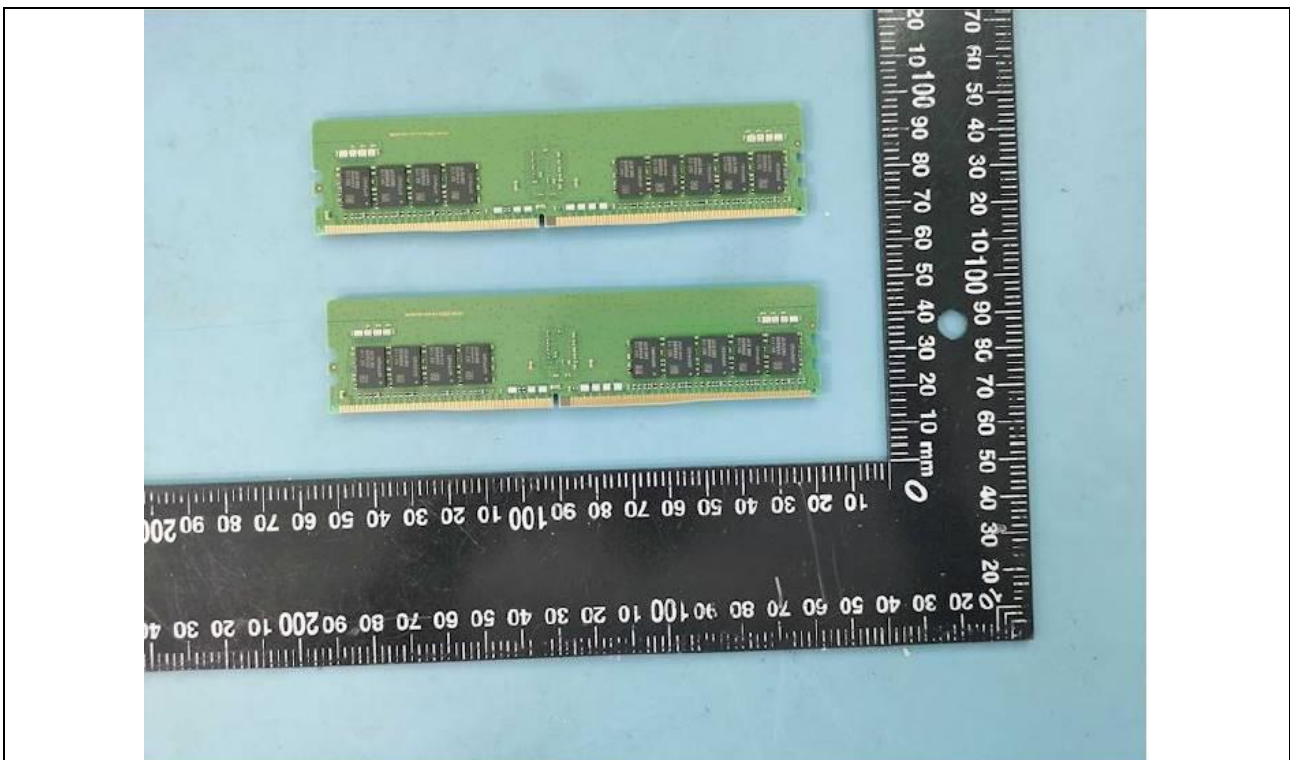


Details of: Internal board 5 view 2 for model DS-A72024R-ICVS

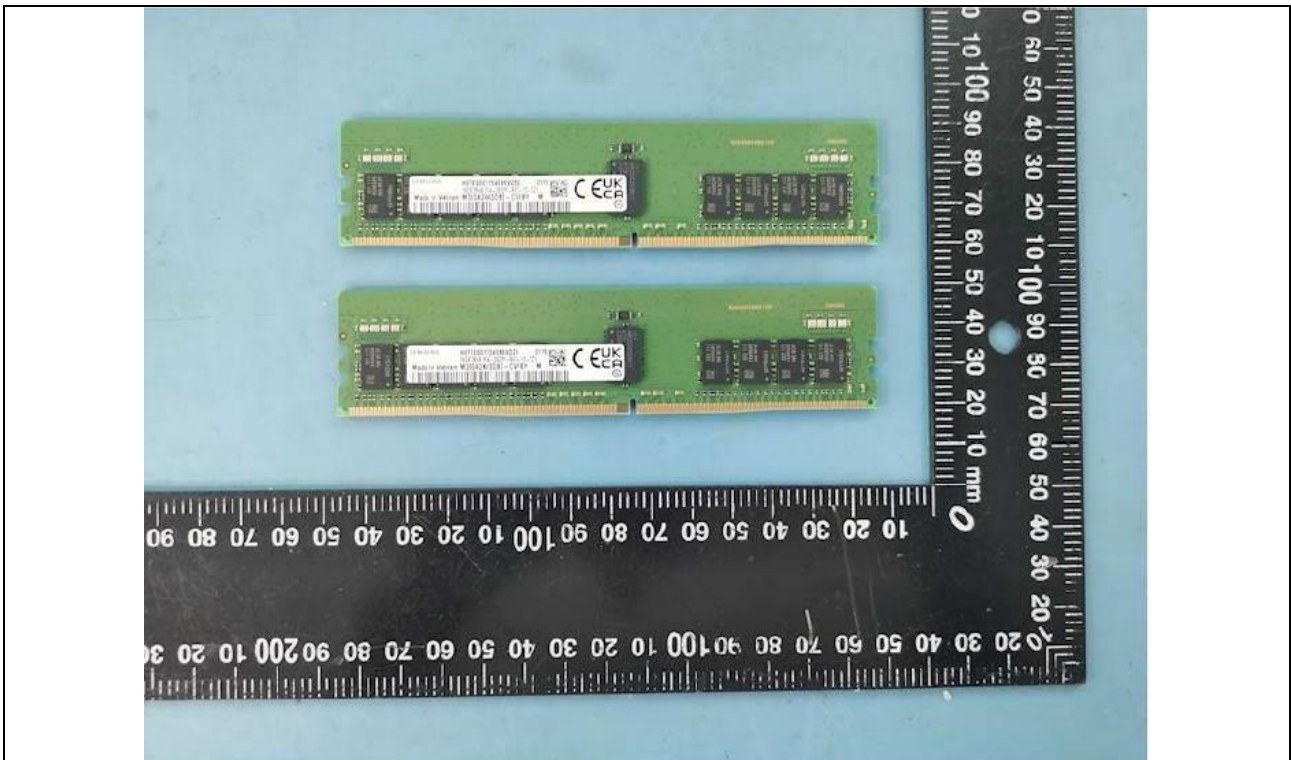


Details of: Internal board 6 view 1 for model DS-A72024R-ICVS

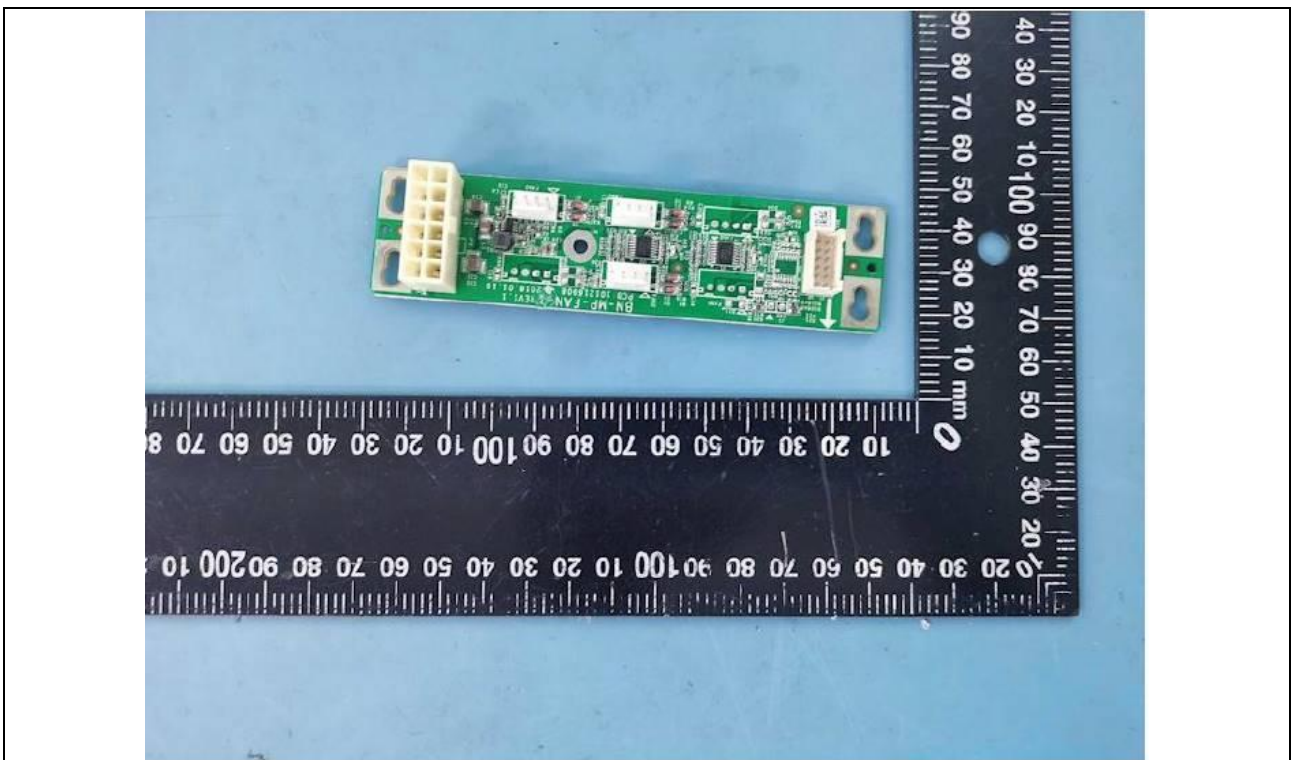


Details of: Internal board 6 view 2 for model DS-A72024R-ICVS

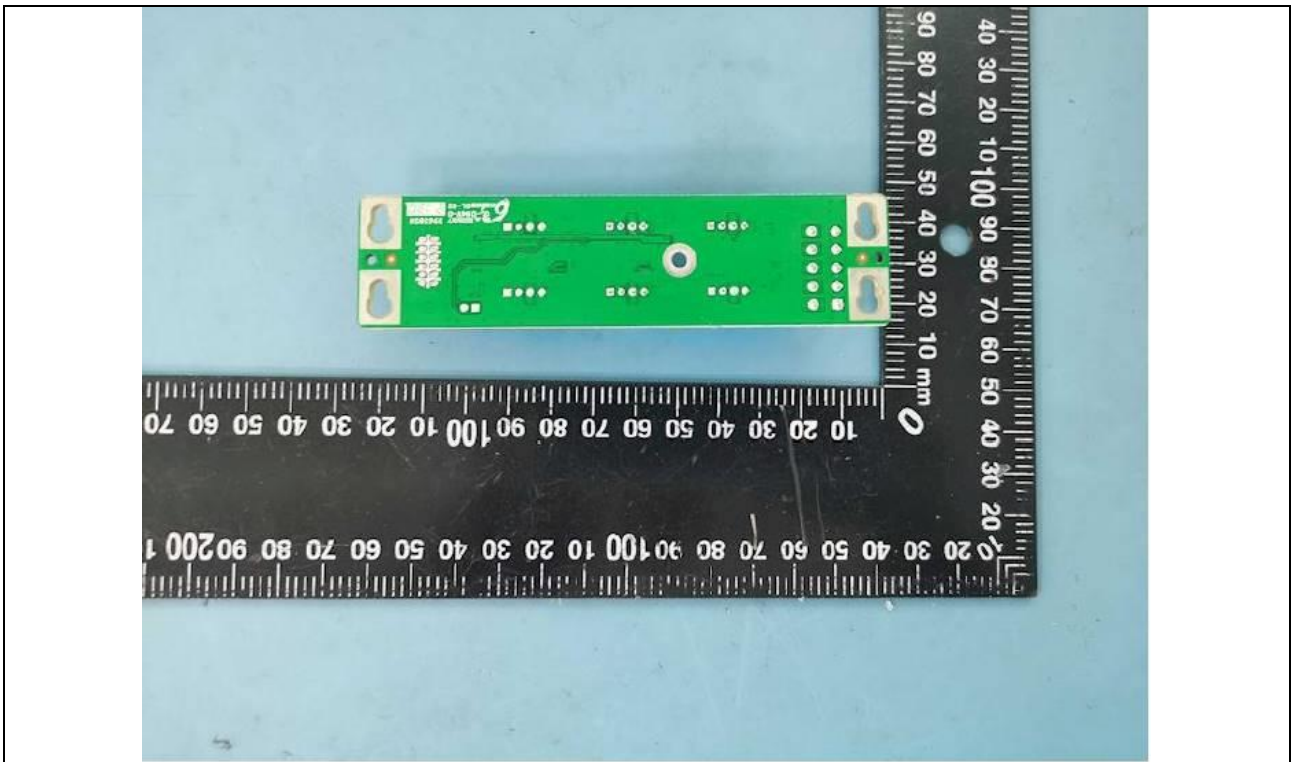

Details of: Indicator light board view 1 for model DS-A72024R-ICVS

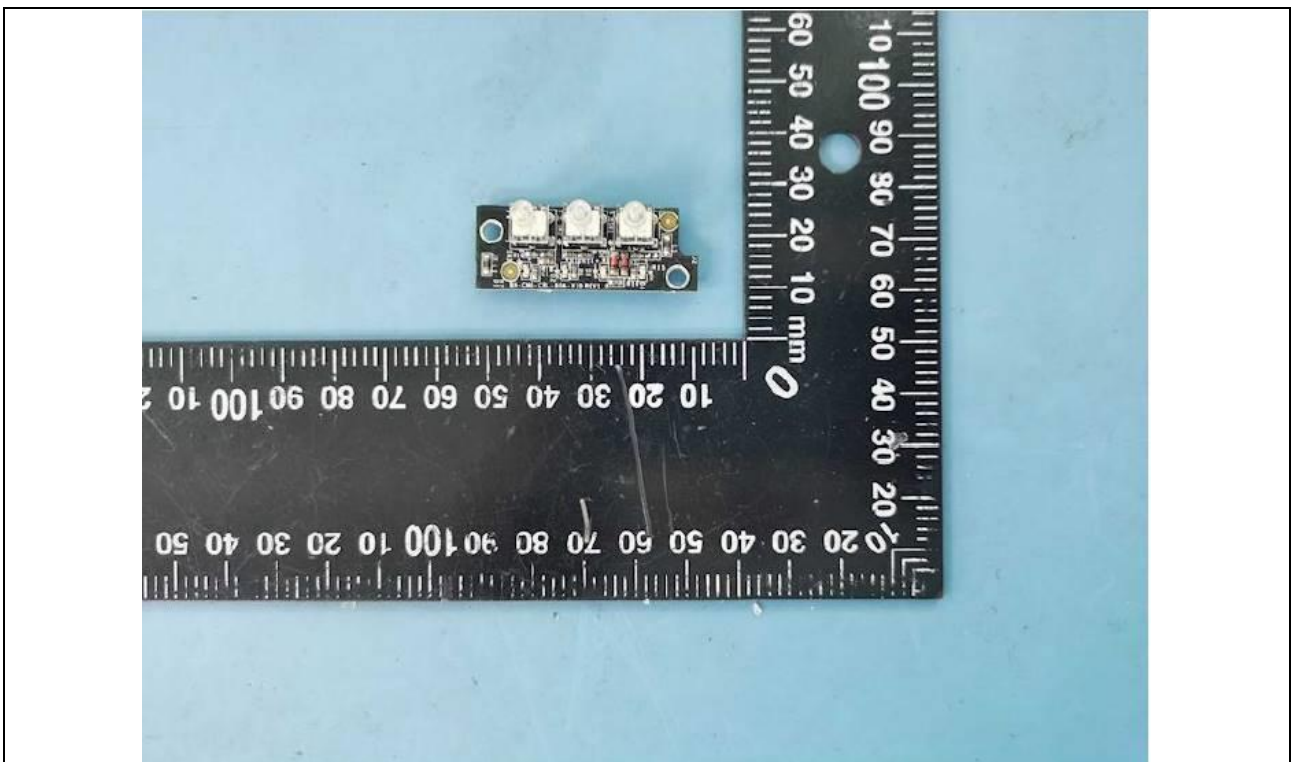


Details of: Indicator light board view 2 for model DS-A72024R-ICVS

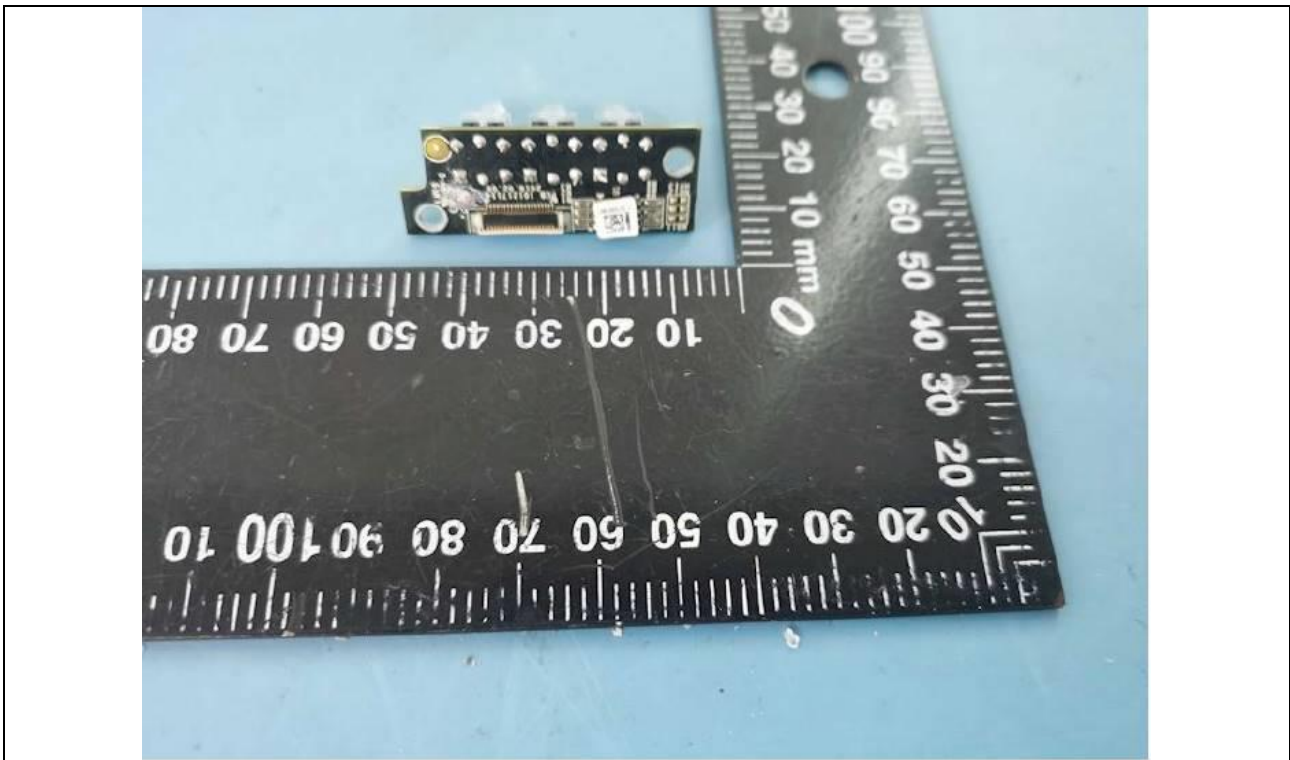

Details of: HDD board view 1 for model DS-A72024R-ICVS



Details of: HDD board view 2 for model DS-A72024R-ICVS

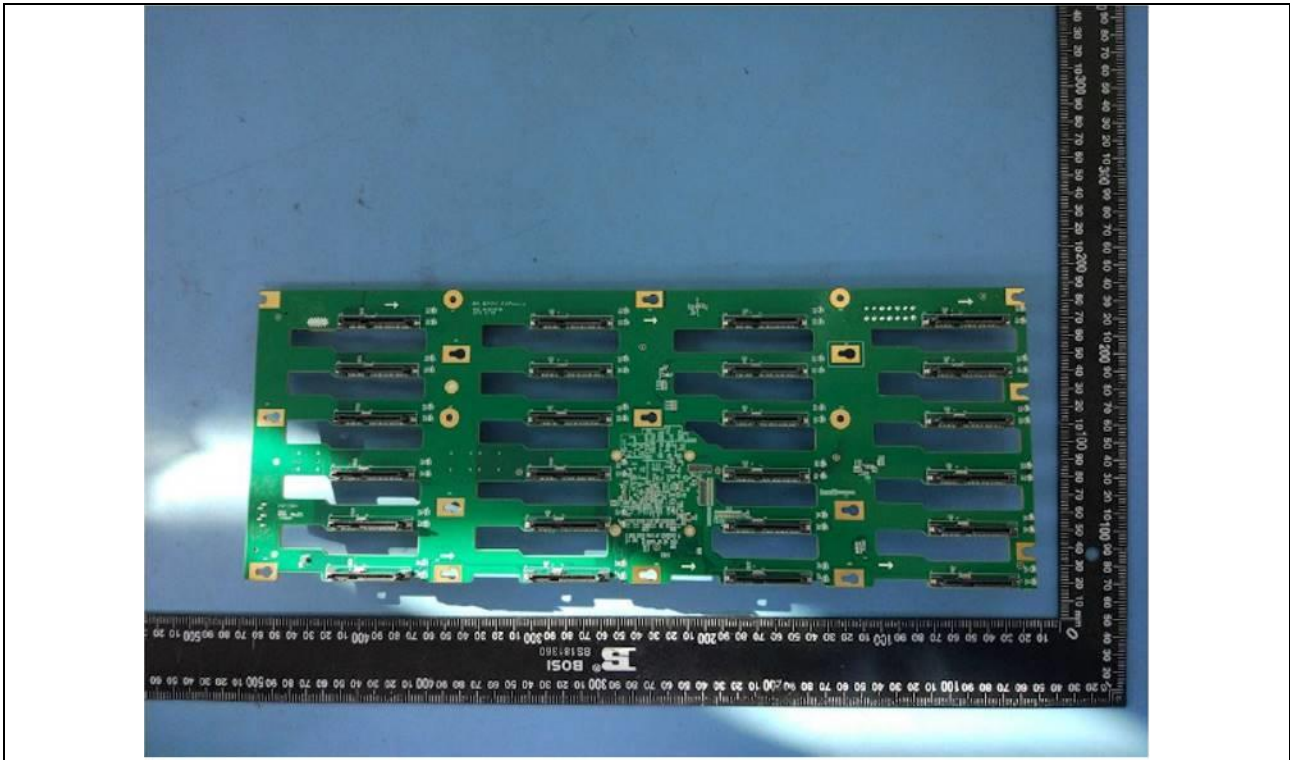

Details of: Overall view for model DS-A72036R-ICVS



Details of: Overall view for model DS-A72036R-ICVS




Details of: Overall view for model DS-A72036R-ICVS



Details of: Overall view for model DS-A72036R-ICVS



Details of: Internal view for model DS-A72036R-ICVS

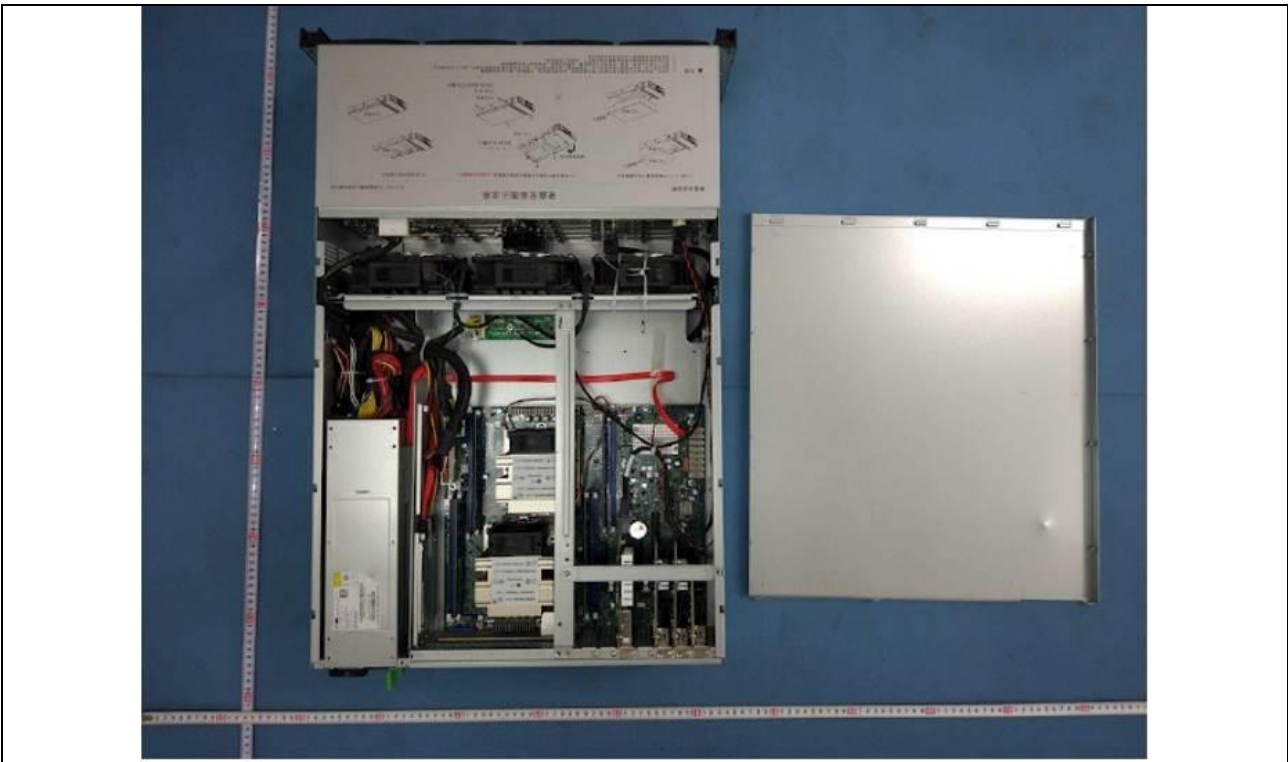


Details of: Internal view for model DS-A72036R-ICVS



Details of: Internal view for model DS-A72036R-ICVS



Details of: Mainboard view for model DS-A72036R-ICVS

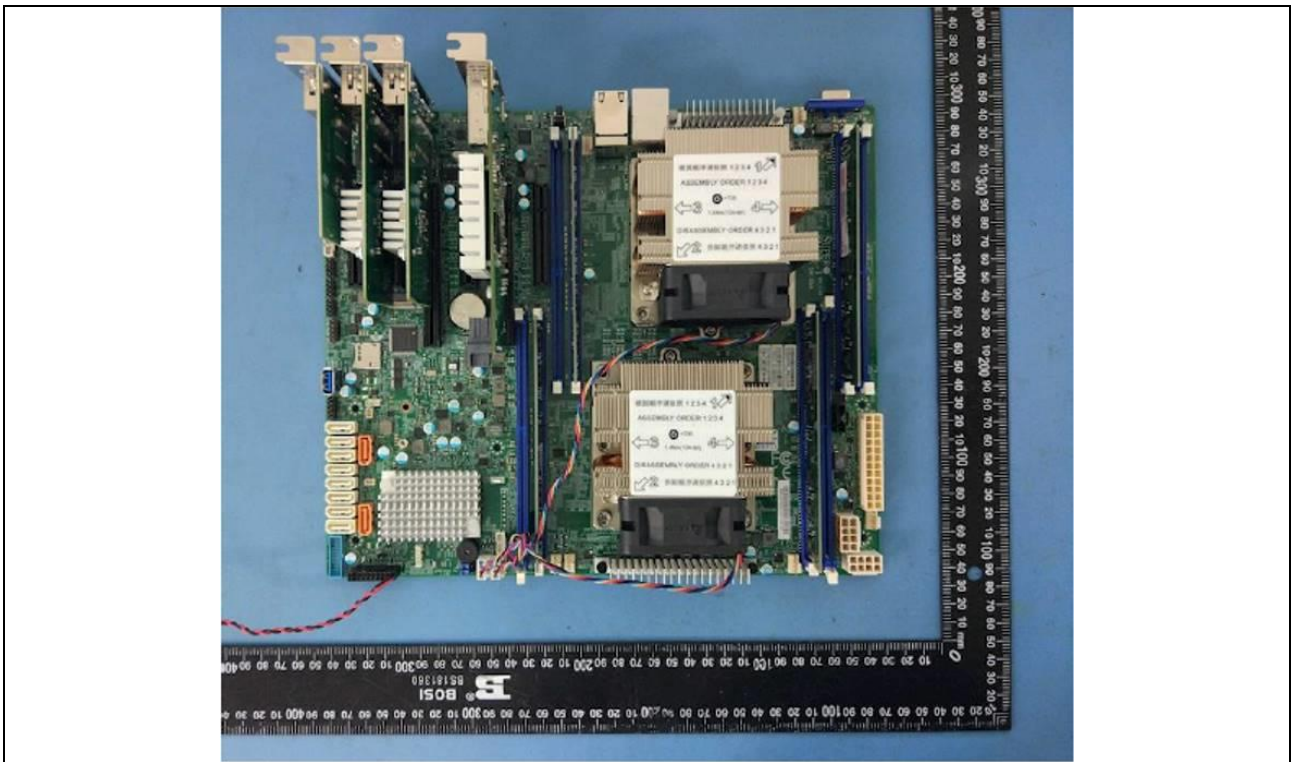


Details of: Mainboard view for model DS-A72036R-ICVS




Details of: Internal board 1 view 2 for model DS-A72036R-ICVS




Details of: Internal board 2 view 1 for model DS-A72036R-ICVS

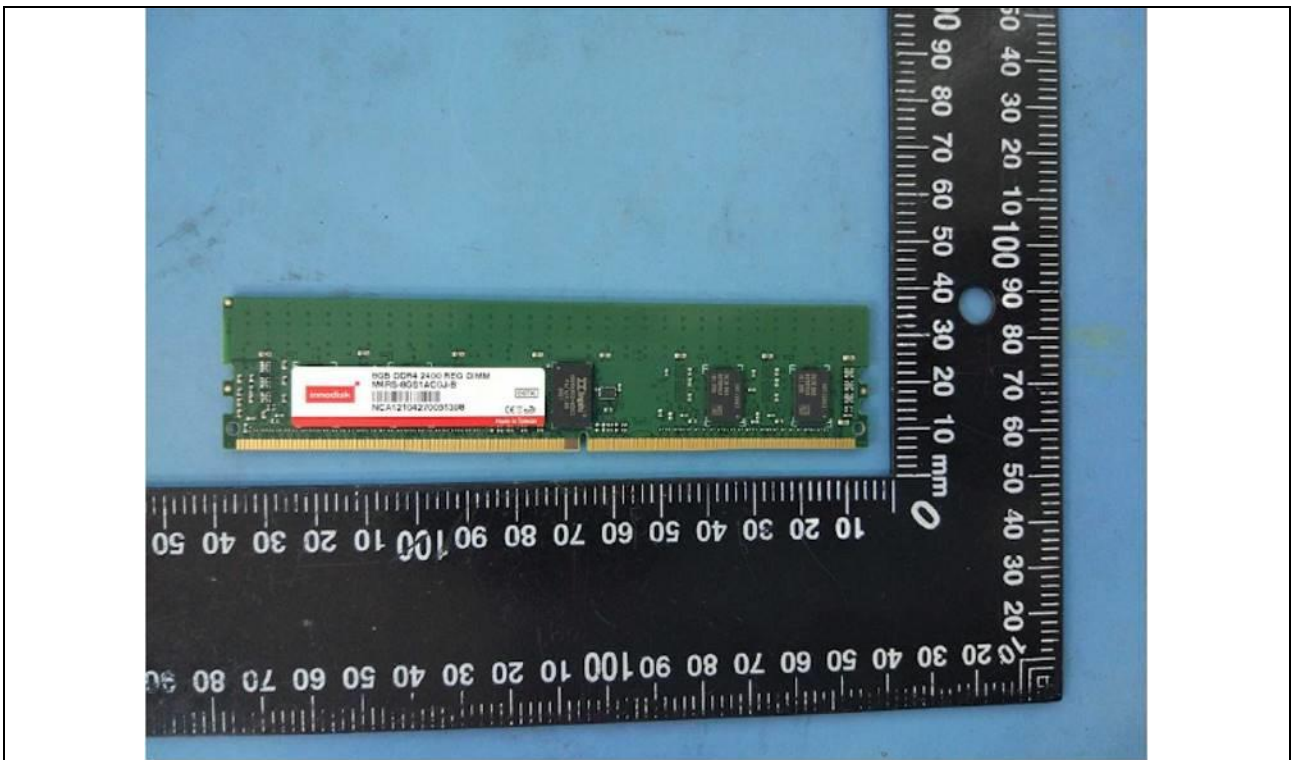


Details of: Internal board 2 view 2 for model DS-A72036R-ICVS

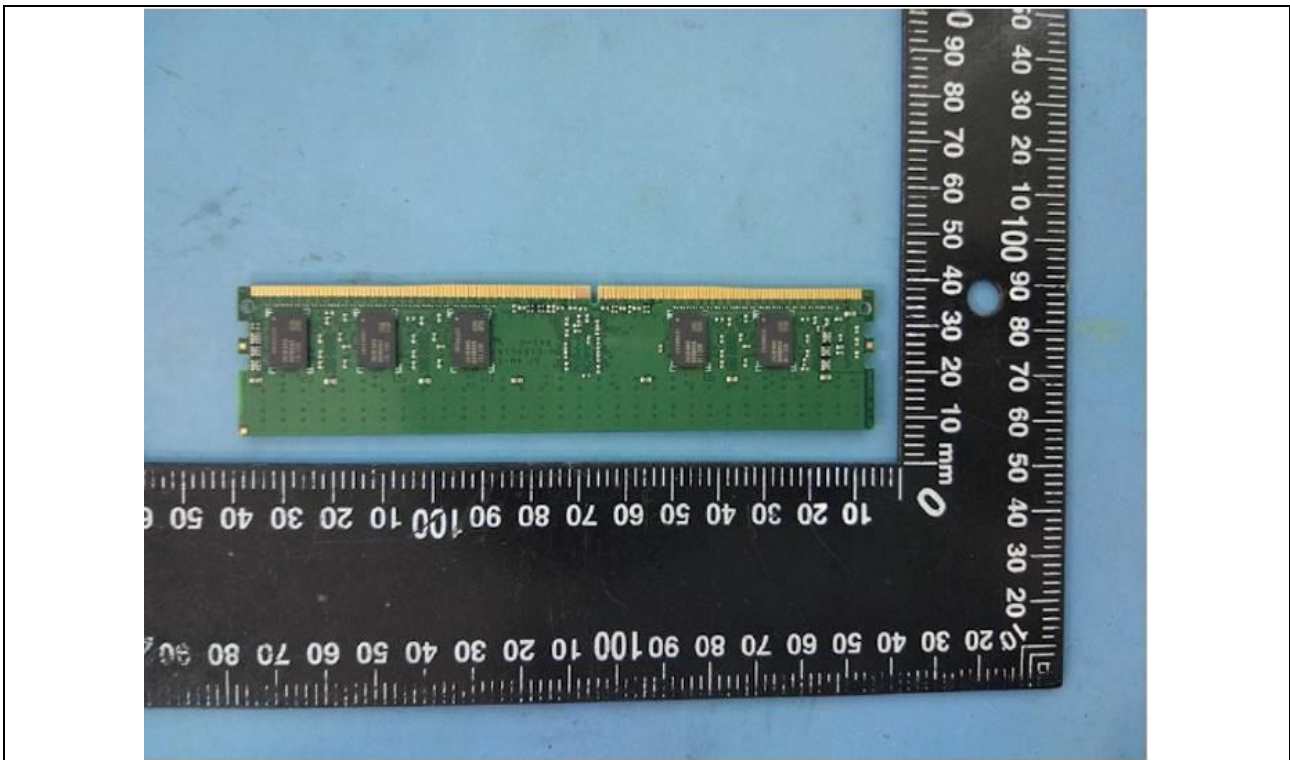

Details of: Internal board 3 view 1 for model DS-A72036R-ICVS

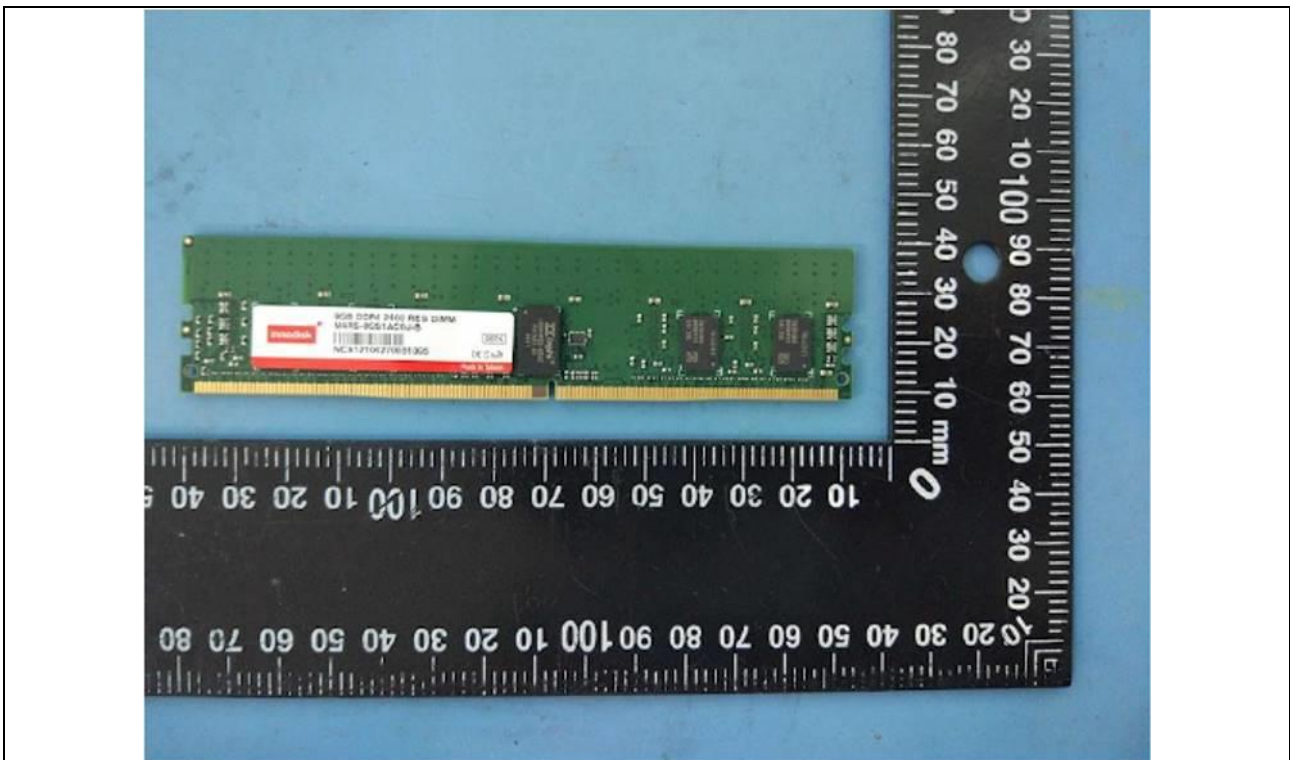

Details of: Internal board 3 view 2 for model DS-A72036R-ICVS

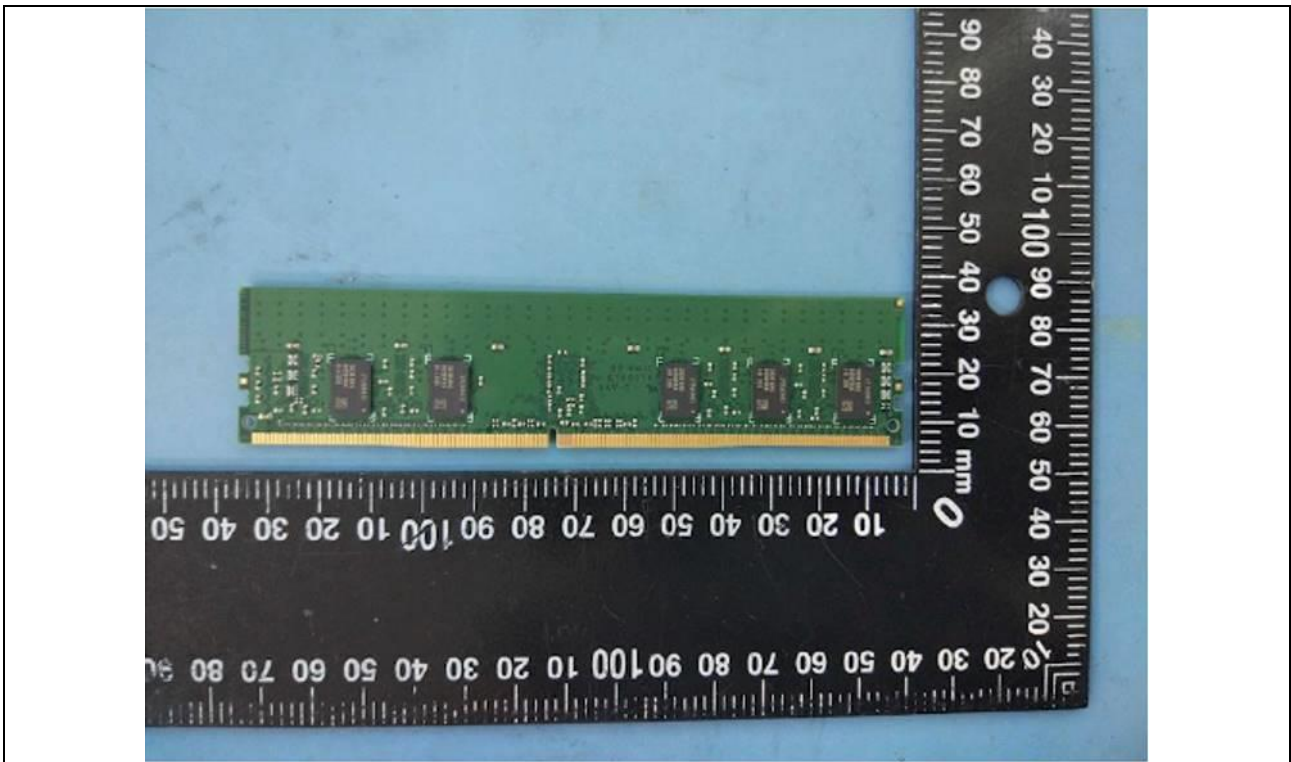

Details of: Internal board 4 view 1 for model DS-A72036R-ICVS




Details of: Internal board 4 view 2 for model DS-A72036R-ICVS




Details of: Internal board 5 view 1 for model DS-A72036R-ICVS




Details of: Internal board 5 view 2 for model DS-A72036R-ICVS

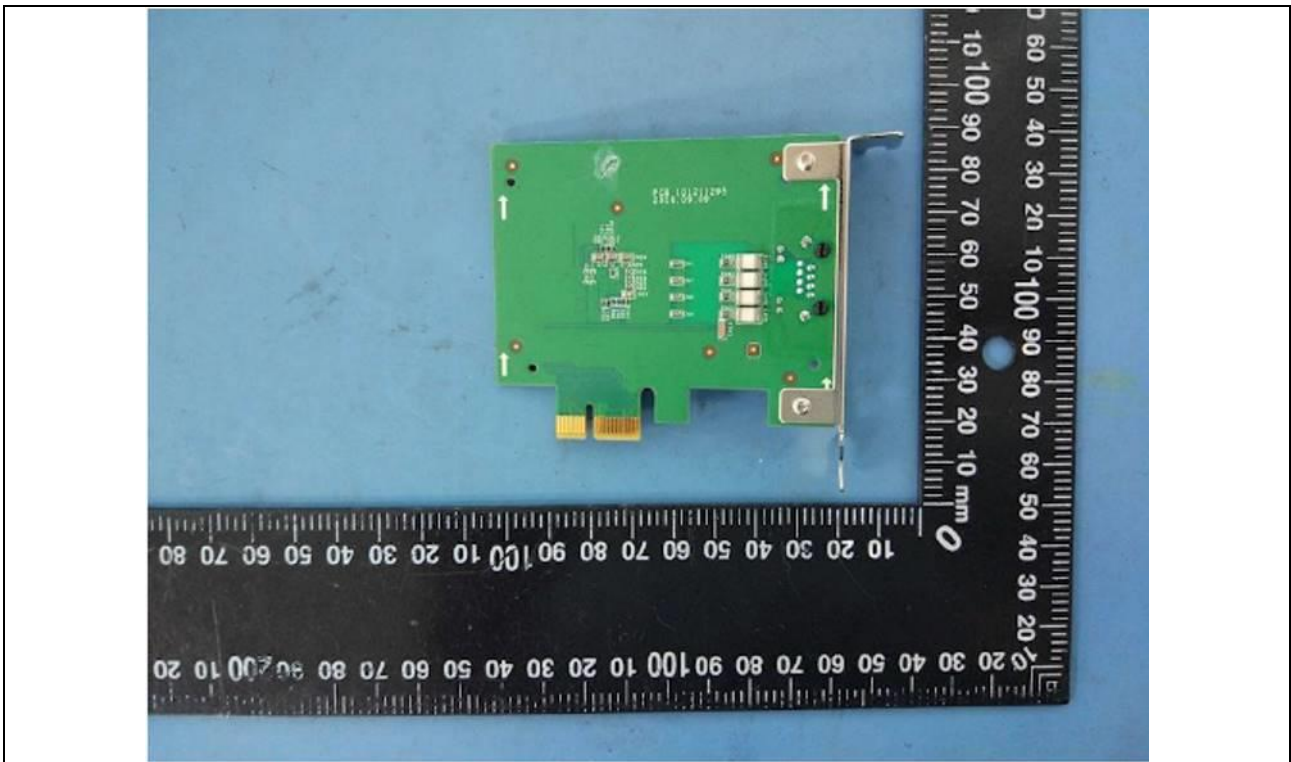

Details of: Internal board 6 view 1 for model DS-A72036R-ICVS

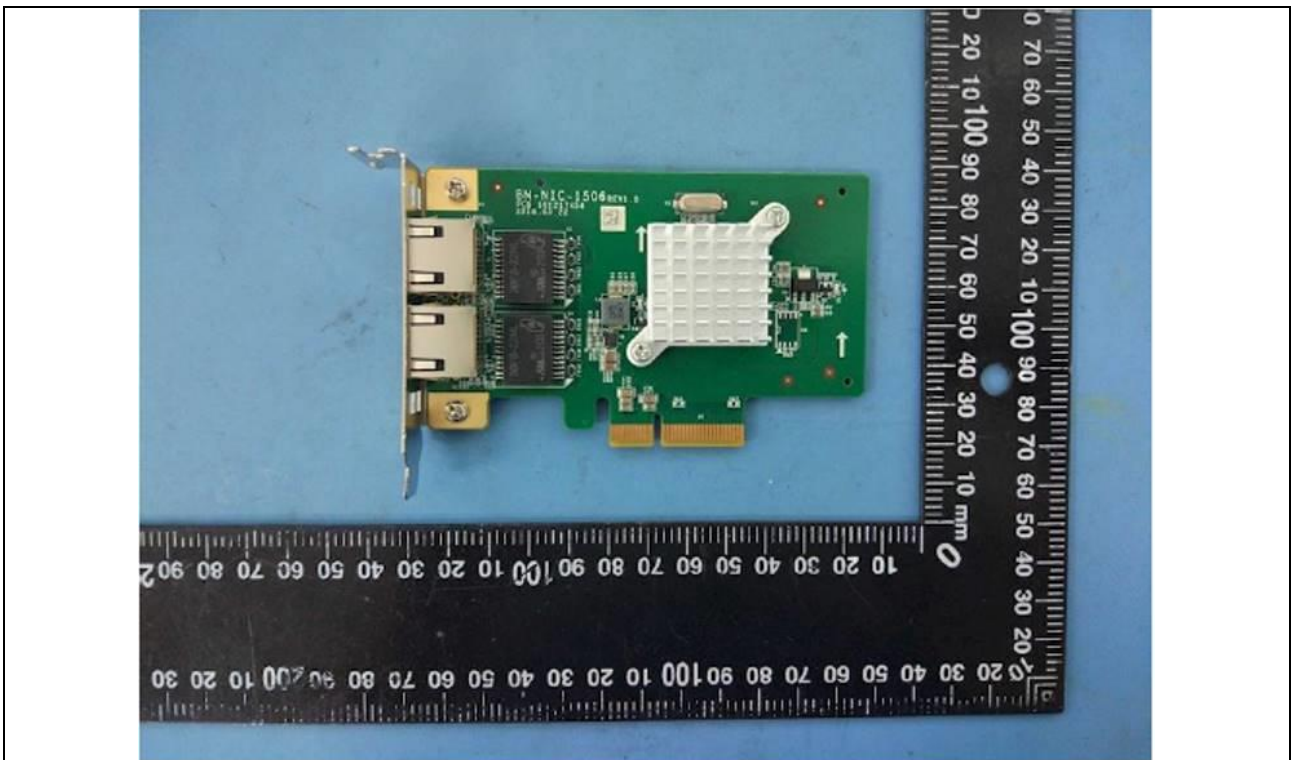

Details of: Internal board 6 view 2 for model DS-A72036R-ICVS

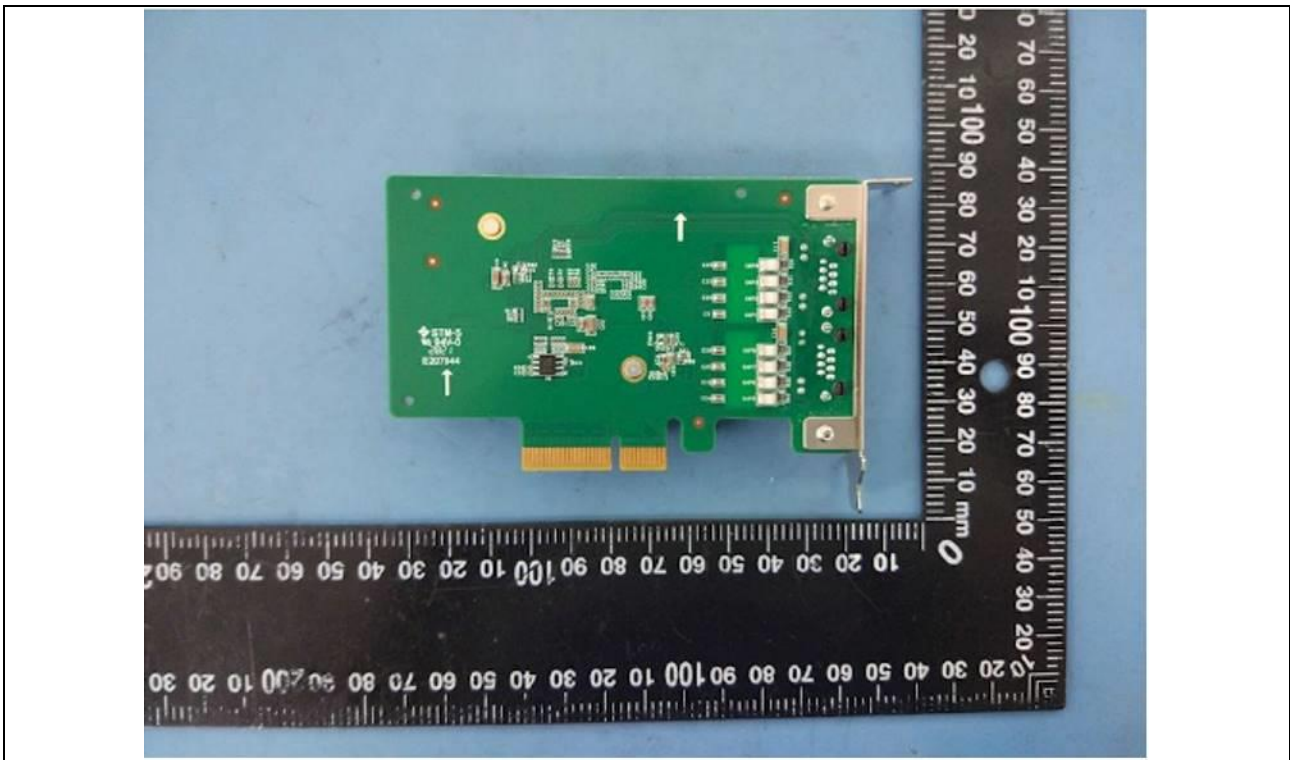


Details of: HDD board view 1 for model DS-A72036R-ICVS




Details of: HDD board view 2 for model DS-A72036R-ICVS




Details of: Indicator light board view 1 for model DS-A72036R-ICVS/

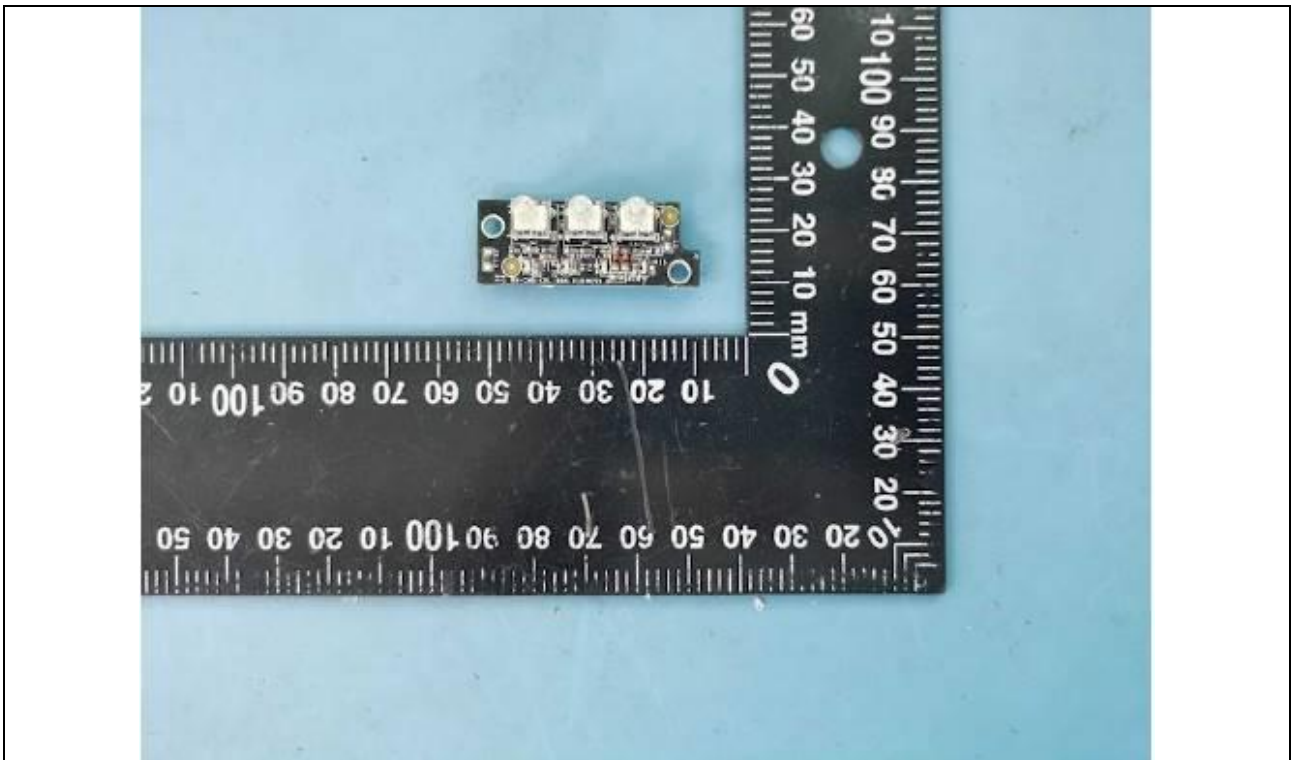


Details of: Indicator light board view 2 for model DS-A72036R-ICVS

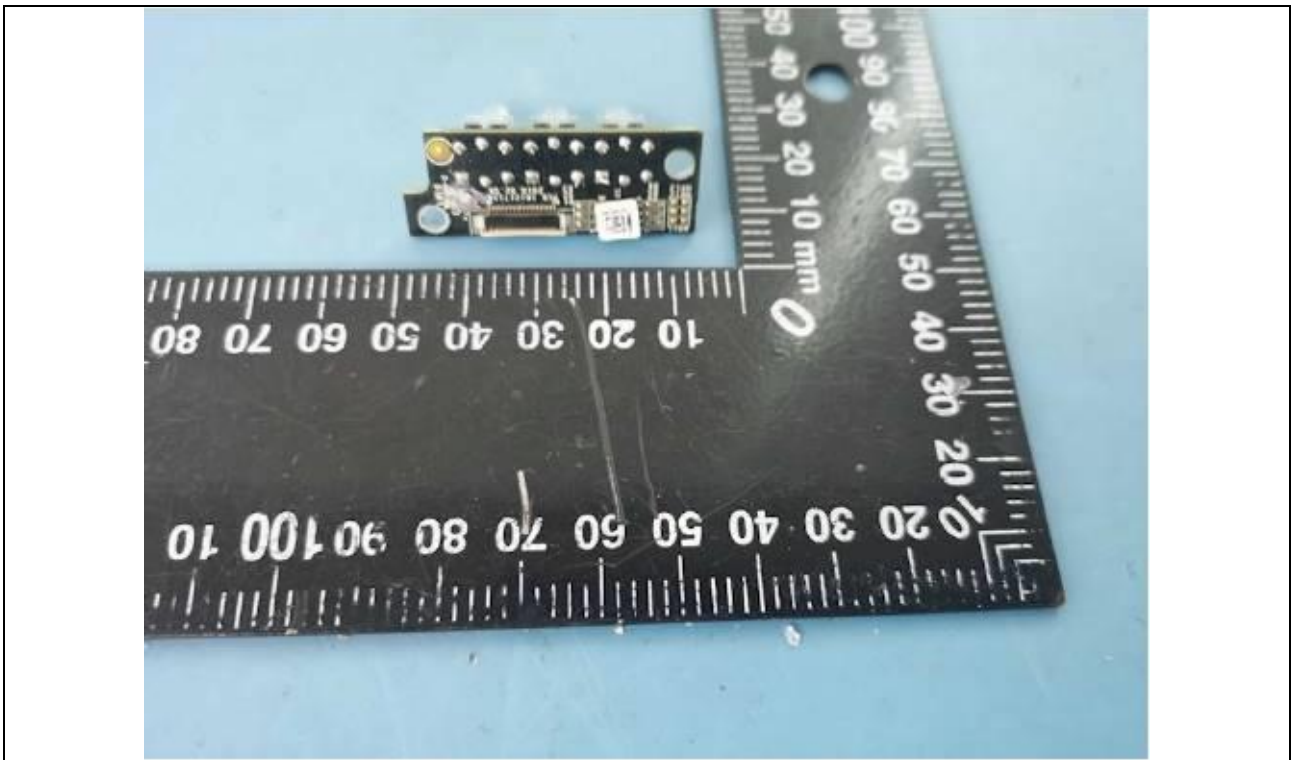


Details of: Internal board 7 view 1 for model DS-A72036R-ICVS

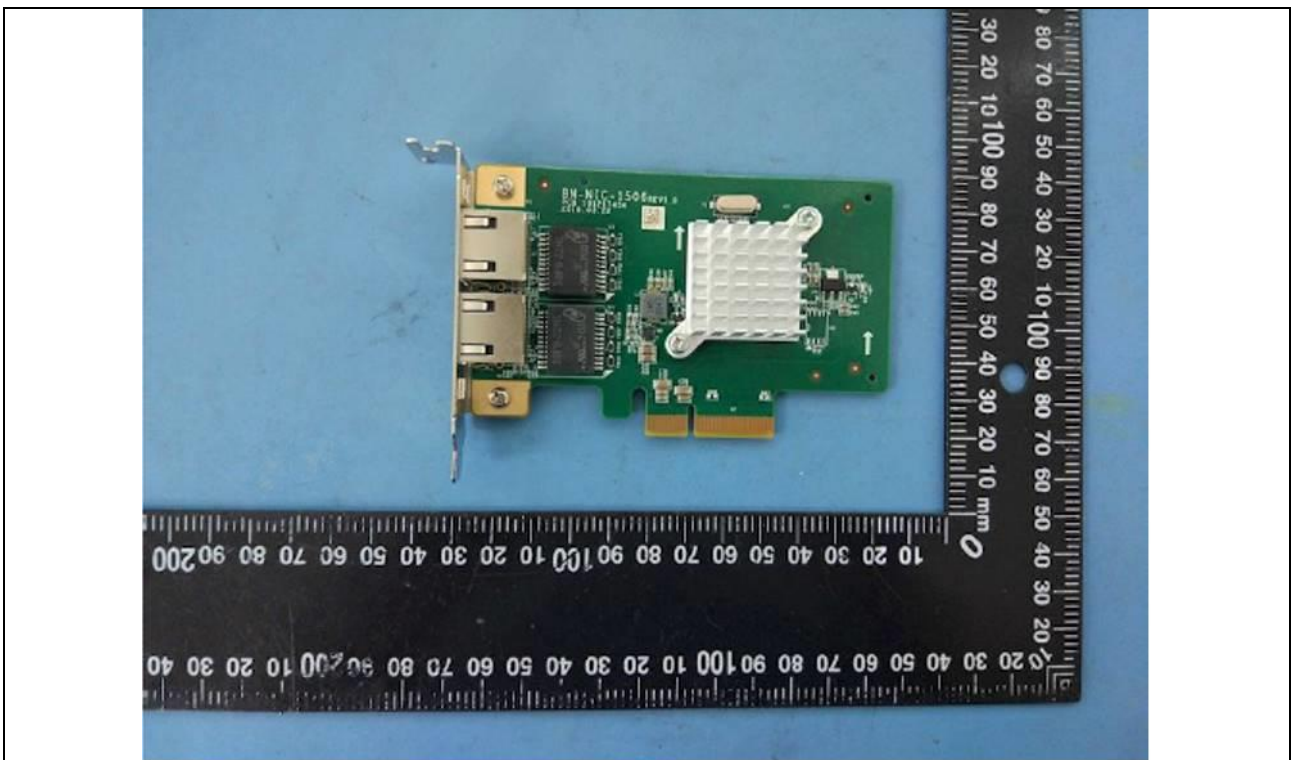


Details of: Internal board 7 view 2 for model DS-A72036R-ICVS

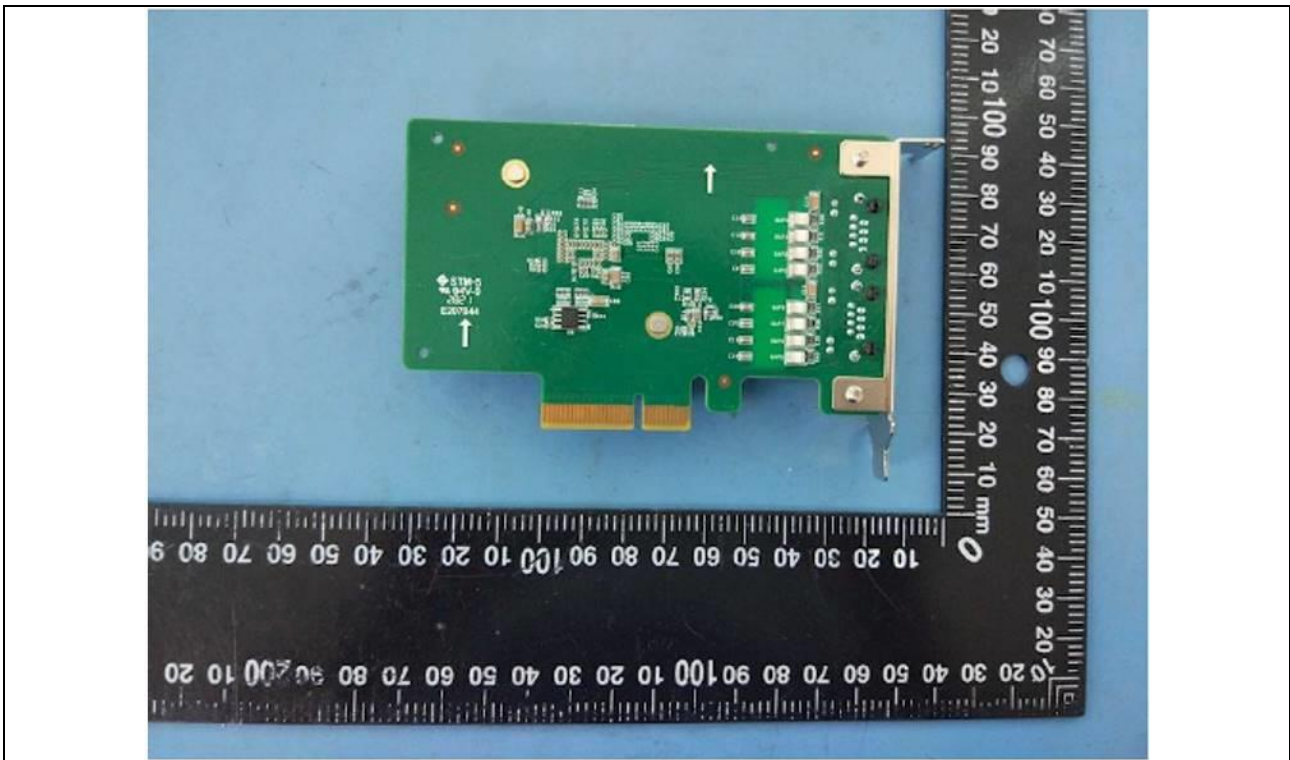

Details of: Internal board 8 view 1 for model DS-A72036R-ICVS

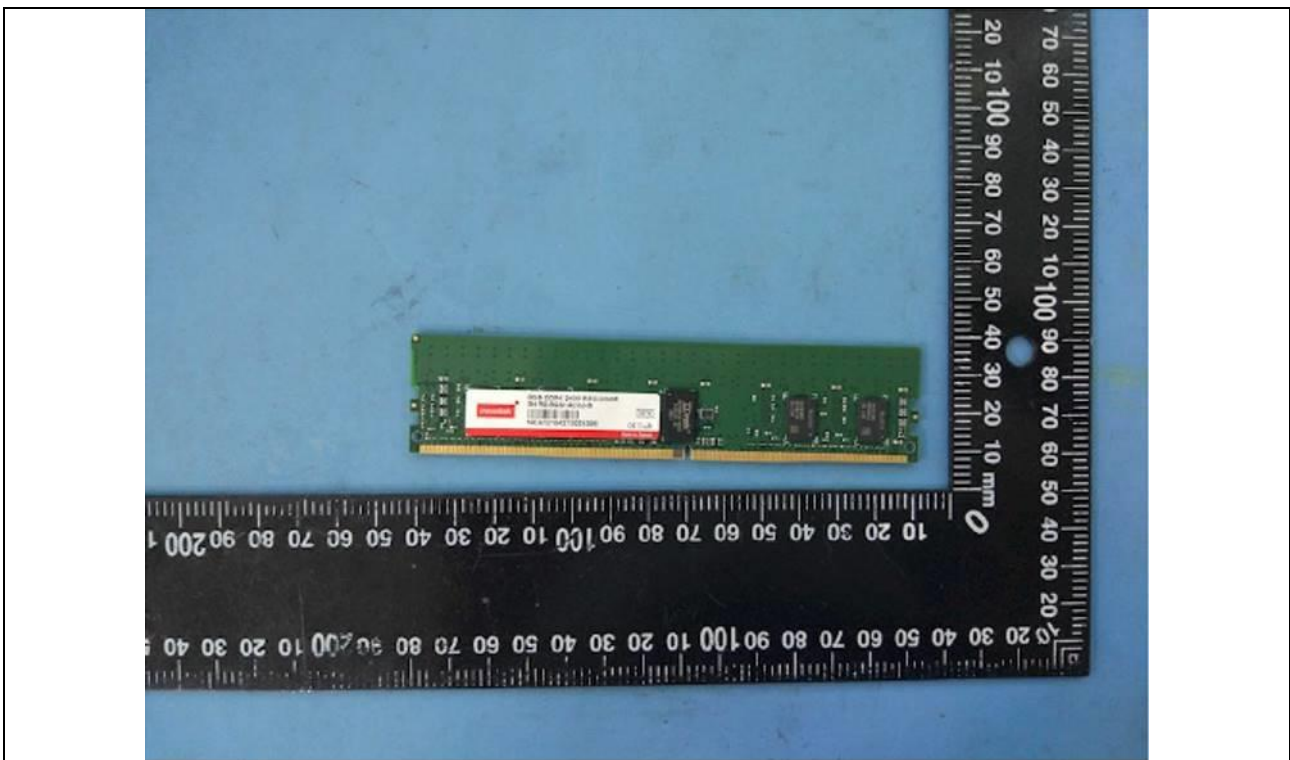


Details of: Internal board 7 view 2 for model DS-A72036R-ICVS

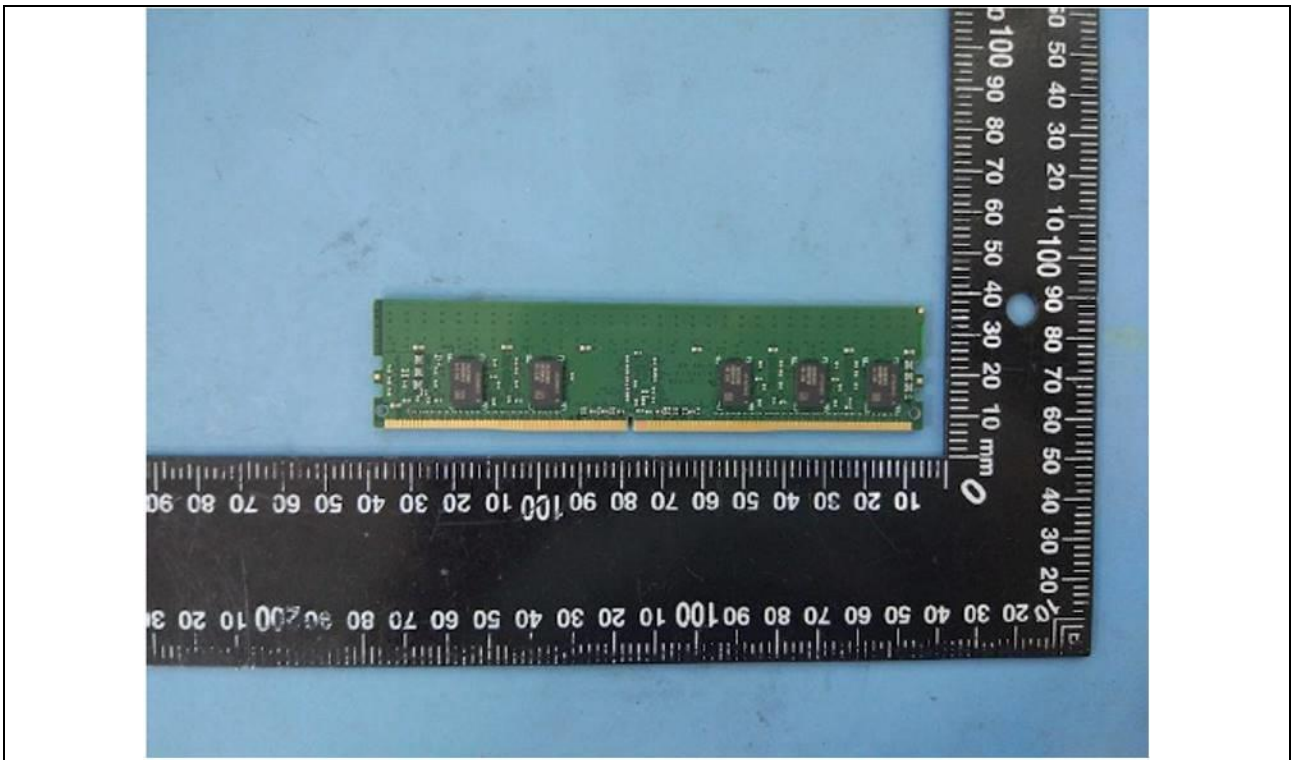


Details of: Internal board 8 view 1 for model DS-A72036R-ICVS




Details of: Internal board 8 view 2 for model DS-A72036R-ICVS

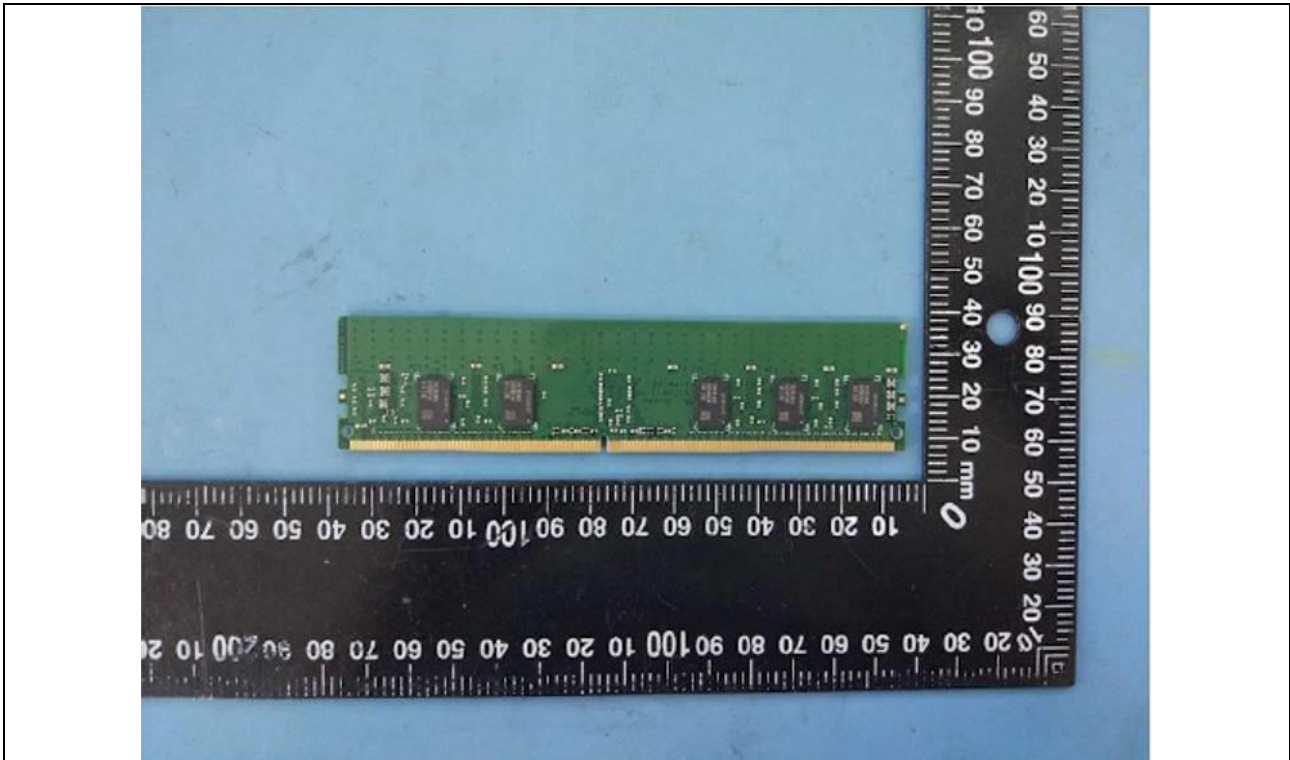

Details of: Internal board 9 view 1 for model DS-A72036R-ICVS

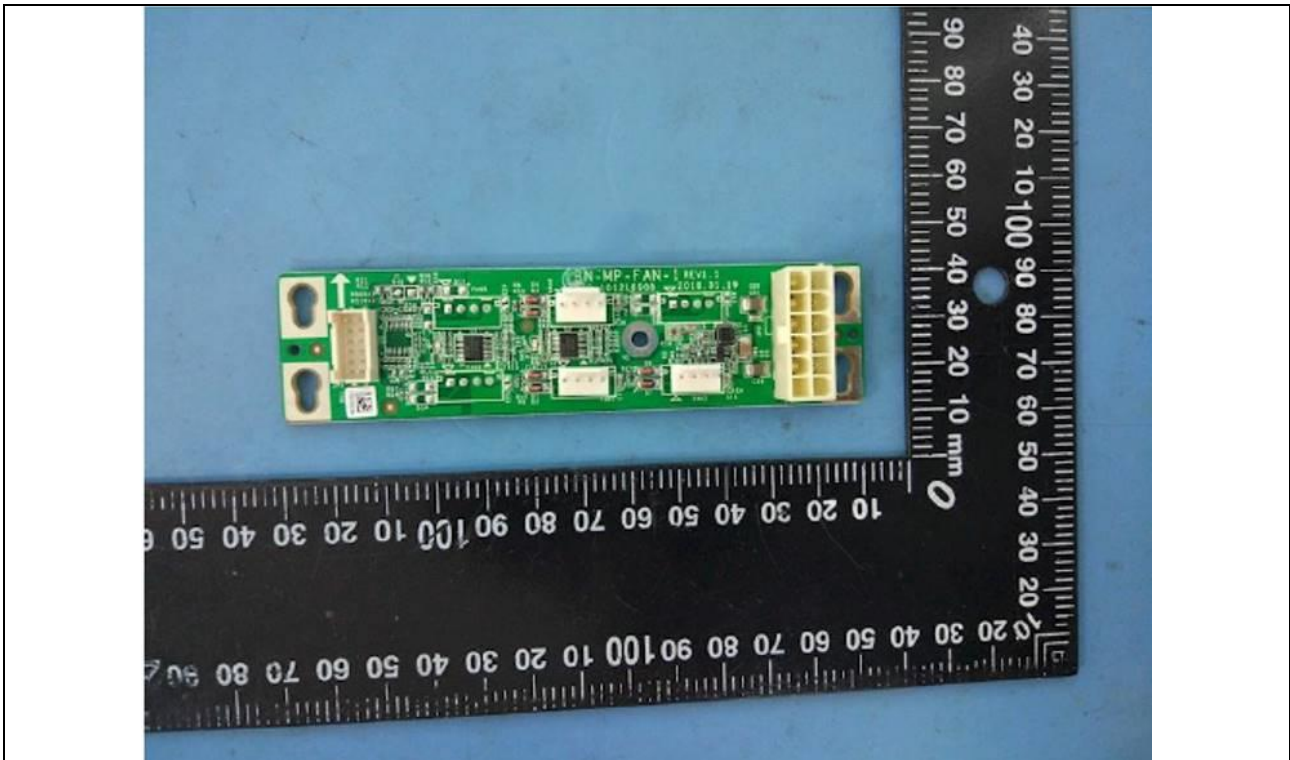

Details of: Internal board 9 view 2 for model DS-A72036R-ICVS

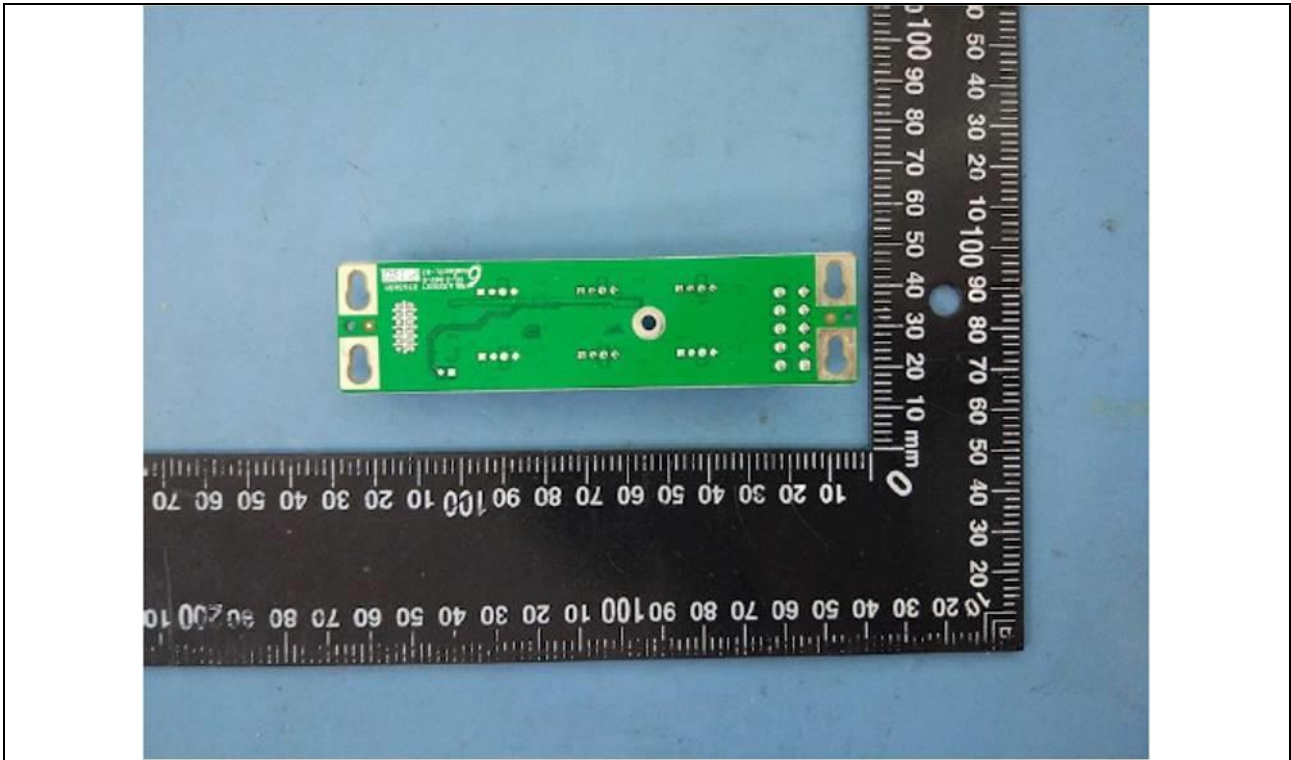

*****End of Attachment 1*****

Page 1 of 10				Report No.: SHES230400709801																																					
IEC62368_1D – ATTACHMENT 2																																									
Clause	Requirement + Test			Result - Remark	Verdict																																				
<div>ATTACHMENT TO TEST REPORT</div> <div>IEC 62368-1</div> <div>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</div> <div>(Audio/video, information and communication technology equipment - Part 1: Safety requirements)</div>																																									
Differences according to : EN 62368-1:2014+A11:2017																																									
Attachment Form No. : EU_GD_IEC62368_1D_II																																									
Attachment Originator : Nemko AS																																									
Master Attachment..... : Date 2021-02-04																																									
Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.																																									
	CENELEC COMMON MODIFICATIONS (EN)				P																																				
	Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2014 are prefixed “Z”.				P																																				
CONTENTS	<div>Add the following annexes:</div> <div><div>Annex ZA (normative)</div><div>Normative references to international publications with their corresponding European publications</div><div>Annex ZB (normative)</div><div>Special national conditions</div><div>Annex ZC (informative)</div><div>A-deviations</div><div>Annex ZD (informative)</div><div>IEC and CENELEC code designations for flexible cords</div></div>				P																																				
	<div>Delete all the “country” notes in the reference document (IEC 62368-1:2014) according to the following list:</div> <table><tr><td>0.2.1</td><td>Note</td><td>1</td><td>Note 3</td><td>4.1.15</td><td>Note</td></tr><tr><td>4.7.3</td><td>Note 1 and 2</td><td>5.2.2.2</td><td>Note</td><td>5.4.2.3.2.2 Table 13</td><td>Note c</td></tr><tr><td>5.4.2.3.2.4</td><td>Note 1 and 3</td><td>5.4.2.5</td><td>Note 2</td><td>5.4.5.1</td><td>Note</td></tr><tr><td>5.5.2.1</td><td>Note</td><td>5.5.6</td><td>Note</td><td>5.6.4.2.1</td><td>Note 2 and 3</td></tr><tr><td>5.7.5</td><td>Note</td><td>5.7.6.1</td><td>Note 1 and 2</td><td>10.2.1 Table 39</td><td>Note 2, 3 and 4</td></tr><tr><td>10.5.3</td><td>Note 2</td><td>10.6.2.1</td><td>Note 3</td><td>F.3.3.6</td><td>Note 3</td></tr></table>				0.2.1	Note	1	Note 3	4.1.15	Note	4.7.3	Note 1 and 2	5.2.2.2	Note	5.4.2.3.2.2 Table 13	Note c	5.4.2.3.2.4	Note 1 and 3	5.4.2.5	Note 2	5.4.5.1	Note	5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3	5.7.5	Note	5.7.6.1	Note 1 and 2	10.2.1 Table 39	Note 2, 3 and 4	10.5.3	Note 2	10.6.2.1	Note 3	F.3.3.6	Note 3	P
0.2.1	Note	1	Note 3	4.1.15	Note																																				
4.7.3	Note 1 and 2	5.2.2.2	Note	5.4.2.3.2.2 Table 13	Note c																																				
5.4.2.3.2.4	Note 1 and 3	5.4.2.5	Note 2	5.4.5.1	Note																																				
5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3																																				
5.7.5	Note	5.7.6.1	Note 1 and 2	10.2.1 Table 39	Note 2, 3 and 4																																				
10.5.3	Note 2	10.6.2.1	Note 3	F.3.3.6	Note 3																																				
	For special national conditions, see Annex ZB.				P																																				
1	<div>Add the following note:</div> <div>NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.</div>				P																																				

IEC62368_1D – ATTACHMENT 2

Clause	Requirement + Test	Result - Remark	Verdict
4.Z1	<p>Add the following new subclause after 4.9:</p> <p>To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. mains, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for pluggable equipment type B or permanently connected equipment, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for pluggable equipment type A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>		P
5.4.2.3.2.4	<p>Add the following to the end of this subclause:</p> <p>The requirement for interconnection with external circuit is in addition given in EN 50491-3:2009.</p>		N/A
10.2.1	<p>Add the following to c) and d) in table 39:</p> <p>For additional requirements, see 10.5.1.</p>		N/A

IEC62368_1D – ATTACHMENT 2

Clause	Requirement + Test	Result - Remark	Verdict
10.5.1	<p>Add the following after the first paragraph: <i>For RS 1 compliance is checked by measurement under the following conditions:</i></p> <p><i>In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or presets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made.</i></p> <p>NOTE Z1 Soldered joints and paint lockings are examples of adequate locking.</p> <p><i>The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus.</i></p> <p><i>Moreover, the measurement shall be made under fault conditions causing an increase of the high-voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made.</i></p> <p><i>For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level.</i></p> <p>NOTE Z2 These values appear in Directive 96/29/Euratom of 13 May 1996.</p>		N/A
10.6.1	<p>Add the following paragraph to the end of the subclause: EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.</p>		N/A
10.Z1	<p>Add the following new subclause after 10.6.5. 10.Z1 Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz</p> <p>The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz).</p> <p>For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body-mounted devices, attention is drawn to EN 50360 and EN 50566</p>		N/A
G.7.1	<p>Add the following note: NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.</p>		N/A

IEC62368_1D – ATTACHMENT 2			
Clause	Requirement + Test	Result - Remark	Verdict
Bibliography	<p>Add the following standards:</p> <p>Add the following notes for the standards indicated:</p> <p>IEC 60130-9 NOTE Harmonized as EN 60130-9.</p> <p>IEC 60269-2 NOTE Harmonized as HD 60269-2.</p> <p>IEC 60309-1 NOTE Harmonized as EN 60309-1.</p> <p>IEC 60364 NOTE some parts harmonized in HD 384/HD 60364 series.</p> <p>IEC 60601-2-4 NOTE Harmonized as EN 60601-2-4.</p> <p>IEC 60664-5 NOTE Harmonized as EN 60664-5.</p> <p>IEC 61032:1997 NOTE Harmonized as EN 61032:1998 (not modified).</p> <p>IEC 61508-1 NOTE Harmonized as EN 61508-1.</p> <p>IEC 61558-2-1 NOTE Harmonized as EN 61558-2-1.</p> <p>IEC 61558-2-4 NOTE Harmonized as EN 61558-2-4.</p> <p>IEC 61558-2-6 NOTE Harmonized as EN 61558-2-6.</p> <p>IEC 61643-1 NOTE Harmonized as EN 61643-1.</p> <p>IEC 61643-21 NOTE Harmonized as EN 61643-21.</p> <p>IEC 61643-311 NOTE Harmonized as EN 61643-311.</p> <p>IEC 61643-321 NOTE Harmonized as EN 61643-321.</p> <p>IEC 61643-331 NOTE Harmonized as EN 61643-331.</p>		--
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		--
4.1.15	<p>Denmark, Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Denmark: "Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord."</p> <p>In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In Norway: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In Sweden: "Apparaten skall anslutas till jordat uttag"</p>		N/A
4.7.3	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex</p>		N/A

IEC62368_1D – ATTACHMENT 2

Clause	Requirement + Test	Result - Remark	Verdict
5.2.2.2	<p>Denmark</p> <p>After the 2nd paragraph add the following: A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>		N/A
5.4.11.1 and Annex G	<p>Finland and Sweden</p> <p>To the end of the subclause the following is added: For separation of the telecommunication network from earth the following is applicable: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> • passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), and • is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5kV. <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> • the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11; • the additional testing shall be performed on all the test specimens as described in EN 60384-14; <p>the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</p>		N/A
5.5.2.1	<p>Norway</p> <p>After the 3rd paragraph the following is added: Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).</p>		P

IEC62368_1D – ATTACHMENT 2

Clause	Requirement + Test	Result - Remark	Verdict
5.5.6	Finland, Norway and Sweden To the end of the subclause the following is added: Resistors used as basic safeguard or bridging basic insulation in class I pluggable equipment type A shall comply with G.10.1 and the test of G.10.2.		N/A
5.6.1	Denmark Add to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment. <i>Justification:</i> In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.		N/A
5.6.4.2.1	Ireland and United Kingdom After the indent for pluggable equipment type A , the following is added: – the protective current rating is taken to be 13 A, this being the largest rating of fuse used in the mains plug.		N/A
5.6.5.1	To the second paragraph the following is added: The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1,25 mm ² to 1,5 mm ² in cross-sectional area.		N/A
5.7.5	Denmark To the end of the subclause the following is added: The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.		N/A

IEC62368_1D – ATTACHMENT 2

Clause	Requirement + Test	Result - Remark	Verdict
5.7.6.1	<p>Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>“Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)”</p> <p>NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.”</p> <p>Translation to Swedish:</p> <p>“Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”</p>		N/A

IEC62368_1D – ATTACHMENT 2			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.6.2	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA .</p>		N/A
B.3.1 and B.4	<p>Ireland and United Kingdom</p> <p>The following is applicable:</p> <p>To protect against excessive currents and short-circuits in the primary circuit of direct plug-in equipment, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the direct plug-in equipment, until the requirements of Annexes B.3.1 and B.4 are met</p>		N/A
G.4.2	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p><i>Justification:</i> Heavy Current Regulations, Section 6c</p>		N/A

IEC62368_1D – ATTACHMENT 2

Clause	Requirement + Test	Result - Remark	Verdict
G.4.2	United Kingdom To the end of the subclause the following is added: The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N/A
G.7.1	United Kingdom To the first paragraph the following is added: Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations. NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A
G.7.1	Ireland To the first paragraph the following is added: Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard		N/A
G.7.2	Ireland and United Kingdom To the first paragraph the following is added: A power supply cord with a conductor of 1,25 mm ² is allowed for equipment which is rated over 10 A and up to and including 13 A.		N/A

IEC62368_1D – ATTACHMENT 2

Clause	Requirement + Test	Result - Remark	Verdict
ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		--
10.5.2	<p>Germany</p> <p>The following requirement applies:</p> <p>For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking.</p> <p><i>Justification:</i></p> <p>German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM.</p> <p>NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int +49-531-592-6320, Internet: http://www.ptb.de</p>		N/A

---End of Attachment 2---

Battery Use Caution

- When battery is used, avoid:
 - High or low extreme temperatures during use, storage and transportation;
 - Extremely low air pressure, or low air pressure at high altitude.
 - Battery replacement.
- Use the battery properly. Improper use of the battery such as the following may cause risks of fire, explosion or leakage of flammable liquid or gas.
 - Replace battery with an incorrect type;
 - Dispose of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery;
- Dispose the used battery according to your local regulations or the battery manufacturer's instructions
- **Personal safety warnings:**
 - Chemical Burn Hazard. This product contains a coin cell battery. Do not ingest battery. If the coin cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
 - Keep new and used batteries away from children.
 - If the battery compartment does not close securely, stop using the product and keep it away from children.
 - If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

Avertissement de l'utilisation de la batterie

- Lorsque utiliser la batterie, évitez:
 - Températures extrêmement élevées ou basses pendant l'utilisation, le stockage et le transport;
 - Pression d'air extrêmement basse, ou pression d'air basse à haute altitude.
 - Remplacement de la batterie.
- Utilisez la batterie correctement. Mauvaise utilisation de la batterie comme celles mentionnées ici, peut entraîner des risques d'incendie, d'explosion ou de fuite liquide de gaz inflammables.
 - Remplacer la batterie par un type incorrect;
 - Disposer d'une batterie dans le feu ou un four chaud, écraser mécaniquement ou couper la batterie;
- Disposer la batterie utilisée conformément à vos règlements locaux ou aux instructions du fabricant de la batterie
- **Avertissements de sécurité personnelle:**
 - Risque de brûlure chimique. Ce produit contient une batterie de

cellules. N'ingérer pas la batterie. Si la batterie de cellule est avalée, elle peut causer de graves brûlures internes en seulement 2 heures et peut entraîner la mort.

- Gardez les batteries nouvelles ou utilisées à l'écart des enfants.
- Si le compartiment de la batterie ne se ferme pas en toute sécurité, cessez d'utiliser le produit et gardez-le à l'écart des enfants.
- Si vous pensez que des piles ont pu être avalées ou placées à l'intérieur d'une partie du corps, consultez immédiatement un médecin.

*****End of attachment 3*****