







## TEST REPORT IEC 62368-1

# Audio/video, information and communication technology equipment Part 1: Safety requirements

Report Number. ....: SUES240300016701

Date of issue .....: 2024-04-09

Total number of pages .....: 55 pages

Name of Testing Laboratory SGS-CSTC Standards Technical Services Co., Ltd. Suzhou Branch

preparing the Report .....:

Applicant's name.....: Hangzhou Hikvision Digital Technology Co., Ltd.

Address .....: No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China

Test specification:

**Standard** .....: IEC 62368-1:2018

Test procedure....: CB Scheme

Non-standard test method....:: N/A

TRF template used .....: IECEE OD-2020-F1:2021, Ed.1.4

Test Report Form No.....: IEC62368 1E

Test Report Form(s) Originator....: UL(US)

Master TRF .....: Dated 2022-04-14

Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

#### General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test	item description:	LCD D	Display Unit	
Trad	e Mark(s):	HIF	K <i>VISION</i>	
Man	ufacturer:	Same	as applicant	
Mod	el/Type reference:	See pa	age 8	
Ratir	ngs:	100-24	40 V a.c.; 50/60 Hz; 5,0A; Class I	
		pplicat	ble), testing procedure and testing location(s):	
	CB Testing Laboratory:		SGS-CSTC Standards Technical Services Co., Ltd. Suzhou Branch	
Testi	ng location/ address	:	No. 10, Weiye Rd, Kunshan Development Zone, Jiar China	ngsu,
Test	ed by (name, function, signature)	:	Sara Chen Sona Chem	
			Project Engineer	
Appr	oved by (name, function, signatu	ıre) :	Ade Wu	
			Reviewer	
П	Testing procedure: CTF Stage 1:			
Testi	ng location/ address			
1000	ng rocation, address illinininini			
Test	ed by (name, function, signature)	:		
Appr	oved by (name, function, signatu	re):		
П	Testing procedure: CTF Stage 2:			
Testi	ng location/ address			
Test	ed by (name, function, signature)			
Witn	essed by (name, function, signate	ure).:		
Appr	oved by (name, function, signatu	ire) :		
	Testing procedure: CTF Stage 3:			
	Testing procedure: CTF Stage 4:			
Testi	ng location/ address	:		
Test	ed by (name, function, signature)	:		
Witn	essed by (name, function, signate	ure).:		
Appr	oved by (name, function, signatu	re):		
Supe	ervised by (name, function, signa	ture) :		

## List of Attachments (including a total number of pages in each attachment):

Attachment 1 – 12 pages of Photos documents;

Attachment 2 – 23 pages of European group differences and national differences;

Attachment 3 – 5 pages of Safety information in user manual

#### Summary of test

The sample(s) tested complies with the requirements of IEC 62368-1: 2018 and EN IEC 62368-1:2020+ A11:2020.

All test data are copied from SGS CB test report SHES230200266901 dated on 2023-05-15, with the following change:

- Add new models DS-D2046UL-0A, DS-D2046UL-0C, DS-D2046TL-0B, DS-D2046EL-0A, DS-D2046RL-0A and DS-D2046NH-F/Y, DS-D2046UL-1A, DS-D2046UL-1C, DS-D2046TL-1B which is identical to previous model except for model name which have no impact for safety.
- Change Product Rear Shell Appearance. Details see Photo documents.

After evaluation, no additional test was considered necessarily.

#### Heating test:

Tma =  $40^{\circ}$ C (declared by manufacturer)

K-type thermocouple used for temperature measurement.

## Tests performed (name of test and test clause): Te

- ☑ 7. Injury caused by hazardous substances
- □ 9. Thermal burn injury

- □ Annex F.3.9. Performance of Marking test
- Annex M Equipment containing batteries and their protection circuits
- Annex Q. Limited Power Source
- Annex T. Mechanical strength tests
- Annex V. Determination of accessible parts

## Testing location:

SGS-CSTC Standards Technical Services Co., Ltd. Suzhou Branch

No. 10, Weiye Rd, Kunshan Development Zone, Jiangsu, China

## Summary of compliance with National Differences (List of countries addressed):

- 1. EU Group Differences (EN IEC 62368-1:2020+A11:2020)
- 2. EU Special National Conditions, EU A-deviations: DE, DK, FI, FR, GB, IE, NO, SE

Explanation of used codes: DE=Germany, DK=Denmark, FI=Finland, FR=France, GB= United Kingdom, IE=Ireland, NO=Norway, SE=Sweden
☑ The products fulfil the requirements.
Use of uncertainty of measurement for decisions on conformity (decision rule) :
No decision rule is specified by the IEC standard, when comparing the measurement result with th applicable limit according to the specification in that standard. The decisions on conformity are mad without applying the measurement uncertainty ("simple acceptance" decision rule, previously known a "accuracy method").
☐ Other: (to be specified, for example when required by the standard or client, or if national

## Information on uncertainty of measurement:

accreditation requirements apply)

The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

## Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective National Certification Body that own these marks.

Marking for DS-D2046LU-Y



#### Remark:

- 1) The Height of CE logo shall not be less than 5 mm; Height of WEEE logo shall not be less than 7 mm.
- 2) The marking plates for other models are of the same pattern except for model name.
- 3) As declared by the applicant, the importer (and manufacturer, if it is different)'s name, registered trade name or registered trade mark and the postal address will be marked on the products before being place on the market. The contact details shall be in a language easily understood by end-users and market surveillance authorities.

Product group	Test item particulars:	
Classification of use by	•	⊠ end product □ built-in component
Instructed person		·
Skilled person	Classification of use by:	
Supply connection		•
not mains connected:	Supply connection:	<del></del> ·
Supply tolerance           +10%/-10%   +20%/-15%   + %/ - %   None   None   Pluggable equipment type A -		<del>_</del>
+20%/-15%		☐ ES1 ☐ ES2 ☐ ES3
Supply connection – type	Supply tolerance:	
Supply connection – type		<del></del>
Supply connection – type		
non-detachable supply cord   appliance coupler   direct plug-in   pluggable equipment type B -   non-detachable supply cord   appliance coupler   direct plug-in   pluggable equipment type B -   non-detachable supply cord   appliance coupler   permanent connection   mating connector   other:   16 A;   Location:   building   equipment   N/A   Equipment mobility   movable   hand-held   transportable   direct plug-in   stationary   for building-in   wall/ceilling-mounted   SRME/rack-mounted   other:   Ovc Iv   other:   Ovc Iv   other:   Ovc Iv   other:   Class of equipment   Special installation location   N/A   restricted access area   outdoor location   Pollution degree (PD)   PD 1   PD 2   PD 3   Manufacturer's specified T <sub>mat</sub>   40°C   Outdoor: minimum   °C   Protection class   N/A   TT   TT   V LL   not AC mains   Altitude during operation (m)   N/A   Clook   100 m   Clook   N/A		
	Supply connection – type:	
direct plug-in   pluggable equipment type B -   non-detachable supply cord   appliance coupler   permanent connection   mating connector   other:    Considered current rating of protective device		• • •
pluggable equipment type B -		··
non-detachable supply cord   appliance coupler   permanent connection   mating connector   other:   16 A;   Location:   building   equipment   N/A   Equipment mobility   movable   hand-held   transportable   direct plug-in   stationary   for building-in   wall/ceiling-mounted   SRME/rack-mounted   other:   OVC I   OVC II   OVC III   OVC IV   other:   Class of equipment   Special installation location   N/A   restricted access area   outdoor location   PD 1   PD 2   PD 3   PD 3   Manufacturer's specified T <sub>ma</sub>   40°C   Outdoor: minimum   °C   IPX0   IP   IP   Power systems   IPX0   IP   IT   IT   V   L   Not AC mains   Altitude during operation (m)   2000 m or less   100 m   IV   Maltitude of test laboratory (m)   2000 m or less   100 m   IV   IV   IV   IV   IV   IV   IV		
appliance coupler   permanent connection   mating connector   other:   16 A;   Location:   building   equipment   N/A   Equipment mobility   movable   hand-held   transportable   direct plug-in   stationary   for building-in   wall/ceiling-mounted   SRME/rack-mounted   other:   OVC I   OVC II   OVC III   OVC III   OVC IV   other:   Class of equipment   Special installation location   N/A   restricted access area   outdoor location   PD 1   PD 2   PD 3   PD 1   PD 2   PD 3   PD 4   PD 5   PD 6   PD 7   PD 7   PD 8   PD 9   PD		, , , , , , , , , , , , , , , , , , , ,
mating connector other:  Considered current rating of protective device		
Considered current rating of protective device		permanent connection
Location:   building   equipment   N/A		☐ mating connector☐ other:
Equipment mobility		
Equipment mobility ::	device:	_ •
direct plug-in   stationary   for building-in   wall/ceiling-mounted   SRME/rack-mounted   other:  Overvoltage category (OVC)   OVC   O		_
Wall/ceiling-mounted □ SRME/rack-mounted   □ other: □ OVC I □ OVC II □ OVC III   □ OVC IV □ other:   Class of equipment □ Class I □ Class II □ Class III   □ Not classified □ restricted access area   □ outdoor location □ PD 1 □ PD 2 □ PD 3   Manufacturer's specified Tma. □ 40°C □ Outdoor: minimum °C   IP protection class □ IP   Power systems □ IP   □ not AC mains   Altitude during operation (m) □ 2000 m or less □ m   Altitude of test laboratory (m) □ 2000 m or less □ 100 m	Equipment mobility:	
Overvoltage category (OVC)		
Overvoltage category (OVC) :: OVC I OVC II OVC III OVC IV other:  Class of equipment :: Class I Class II Class III Not classified Outdoor location  Pollution degree (PD) :: PD 1 PD 2 PD 3  Manufacturer's specified T <sub>ma</sub> :: 40°C Outdoor: minimum °C  IP protection class :: IPX0 IP Power systems :: IPX0 IP Over systems IP Over systems IV Over III Over		
Class of equipment :	Overvoltage category (OVC):	<del></del>
Not classified   restricted access area   outdoor location   Pollution degree (PD)   PD 1   PD 2   PD 3		
Special installation location       :	Class of equipment:	☐ Class II ☐ Class III
Outdoor location   Pollution degree (PD)   PD 1		<b>—</b>
Pollution degree (PD)       : □ PD 1       □ PD 2       □ PD 3         Manufacturer's specified Tma       : 40°C □ Outdoor: minimum       °C         IP protection class       : □ IPX0 □ IP         Power systems       : □ TN □ IT - V L-L         □ not AC mains         Altitude during operation (m)       : □ 2000 m or less □ m         Altitude of test laboratory (m)       : □ 2000 m or less □ 100 m	Special installation location:	
Manufacturer's specified T <sub>ma</sub> : 40°C ☐ Outdoor: minimum °C  IP protection class: ☐ IPX0 ☐ IP  Power systems: ☐ TN ☐ TT ☐ IT - V L-L ☐ not AC mains  Altitude during operation (m): ☐ 2000 m or less ☐ m  Altitude of test laboratory (m): ☐ 2000 m or less ☐ 100 m		<u> </u>
IP protection class : □ IPX0 □ IP   Power systems : □ TN □ TT □ IT - V L-L   □ not AC mains   Altitude during operation (m) : □ 2000 m or less □ m   Altitude of test laboratory (m) : □ 2000 m or less □ 100 m	Pollution degree (PD):	☐ PD 1 ☐ PD 2 ☐ PD 3
Power systems: : N N TT IT - V L-L  Inot AC mains  Altitude during operation (m): 2000 m or less  _ m  Altitude of test laboratory (m): 2000 m or less  _ 100 m	Manufacturer's specified T <sub>ma</sub> :	40°C ☐ Outdoor: minimum °C
☐ not AC mains  Altitude during operation (m):	IP protection class:	
☐ not AC mains  Altitude during operation (m):	Power systems:	N TN NTT IT - V L-L
Altitude of test laboratory (m):   2000 m or less 100 m		
	Altitude during operation (m):	□ 2000 m or less   □ m
	Altitude of test laboratory (m):	
Mass of equipment (kg): 🖂 20,1 kg		

Possible test case verdicts:	
- test case does not apply to the test object:	N/A
- test object does meet the requirement:	P (Pass)
- test object does not meet the requirement:	F (Fail)
Testing:	
Date of receipt of test item	2024-03-01
Date (s) of performance of tests	2024-03-02 to 2024-03-10
General remarks:	
"(See Enclosure #)" refers to additional information "(See appended table)" refers to a table appended	
Throughout this report a 🗵 comma / 🗌 point i	is used as the decimal separator.
available on request or accessible at <a href="http://www.sg">http://www.sg</a> . format documents, subject to Terms and Conditions <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter">http://www.sgs.com/en/Terms-and-Conditions/Ter</a> of liability, indemnification and jurisdiction issues do Any holder of this document is advised that informathe time of its intervention only and within the limits responsibility is to its Client and this document does their rights and obligations under the transaction do full, without prior written approval of the Company. content or appearance of this document is unlawful the law.	ms-e-Document.aspx. Attention is drawn to the limitation
Manufacturer's Declaration per sub-clause 4.2.5	of IECEE 02:
The application for obtaining a CB Test Certificate includes more than one factory location and a	⊠ Yes
declaration from the Manufacturer stating that the	☐ Not applicable
sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	Factory declaration Declaration letter- LCD Display Unit.pdf, dated 2024-03-27.
When differences exist; they shall be identified	in the General product information section.
Name and address of factory (ies)::	<ol> <li>Hangzhou Hikvision Technology Co., Ltd. No. 700, Dongliu Road, Binjiang District, Hangzhou City, Zhejiang, 310052, China.</li> </ol>
	<ol> <li>Hangzhou Hikvision Electronics Co., Ltd. No. 299, Qiushi Road, Tonglu Economic Development Zone, Tonglu County, Hangzhou, Zhejiang, 311500, China.</li> </ol>
	3. Chongqing Hikvision Technology Co., Ltd. No. 118, Haikang Road, Area C, Jianqiao Industrial Park, Dadukou District, Chongqing, 401325, China.

## **General product information:**

## **Product Description –**

Functions	The EUT are serials Class I LCD Display Unit, which is powered by building-in power supply through detachable power cord set.
Material of enclosure	Metal & glass
Model difference	All models are the same except model No. which is not affect for safety.
Other features	Indoor use only

Model / Type Ref.			Model remark
DS-D2046LU-Y	DS-D2046HR-Y	DS-D2046NH-C	
DS-D2046LR-Y	DS-D2046NL-C	DS-D2046NH-C/Y	
DS-D2049LU-G	DS-D2046NL-C/Y	DS-D2046NH-F/Y	
DS-D2046NH-E	DS-D2046NL-F/Y	DS-D2046HE-Y	
DS-D2046NH-E/Y	DS-D2049NL-B	DS-D2049HU-Y	/"*" -td- f 0 0 0 7 /
DS-D2049NH-B/Y	DS-D2046LE-Y	DS-D2046NL-E	("*" stands for 0-9, A-Z, /, - or blank.)
DS-D2046HU-Y	DS-D2049LU-Y	DS-D2046NL-E/Y	Diarik.)
DS-D2049NL-B/Y	DS-D2046UL-0A	DS-D2046UL-0C	
DS-D2046TL-0B	DS-D2046EL-0A	DS-D2046RL-0A	
DS-D2046TL-1B	DS-D2046UL-1A	DS-D2046UL-1C	
DS-D2046*****			

## Model Differences -

See above


Additional application considerations – (Considerations used to test a component or sub-assembly) –

Clause	Possible Hazard			
5	Electrically-caused injury			
Class and Energy Source	Body Part		Safeguards	
(e.g. ES3: Primary circuit)	(e.g. Ordinary)	В	S	R
ES3: Internal circuits	Ordinary person	Basic Insulation	Protective Earthing	N/A
ES1: Other internal circuits	Ordinary person	N/A	N/A	N/A
ES1: Enclosure	Ordinary person	N/A	N/A	N/A
6	Electrically-caused fire			
Class and Energy Source	Material part	_	Safeguards	- 1-2
(e.g. PS2: 100 Watt circuit) PS3: All internal circuits	(e.g. Printed board)  Enclosure, materials inside	B 1. No ignition	1 <sup>st</sup> S 1. PCB is of	2 <sup>nd</sup> S N/A
	and outside the enclosure	occurred.  2. No parts exceeding 90% of its spontaneous ignition temperature.  3. combustible material outside fire enclosure is of min HB	min V-1 material  2. All other components were mounted on min V-1 PCB or of min V-2 or small parts of combustible material less than 4g.  3. Fire enclosure provided	
PS1: Output port	Output port	N/A	N/A	N/A
7	Injury caused by hazardous	substances		
Class and Energy Source	Body Part		Safeguards	
(e.g. Ozone)	(e.g., Skilled)	В	S	R
Lithium coin battery	Ordinary person	N/A	N/A	Comply with Annex M
8	Mechanically-caused injury			
Class and Energy Source (e.g. MS3: Plastic fan blades)	Body Part (e.g. Ordinary)		Safeguards	
, -	, ,	B	S	R
MS1: Sharp edges and corners	Ordinary person	N/A	N/A	N/A
MS2: Equipment mass	Ordinary person	N/A	N/A	N/A
MS1: DC fan MS3: Wall mount	Ordinary person Ordinary person	N/A N/A	N/A N/A	N/A Comply with clause 8.7.2

9	Thermal burn			
Class and Energy Source	Body Part	Safeguards		
(e.g. TS1: Keyboard caps)			S	R
TS1: All accessible parts	Ordinary person	N/A	N/A	N/A
10	Radiation			
Class and Energy Source	Body Part	Safeguards		
(e.g. RS1: PMP sound output)	(e.g., Ordinary)	В	S	R
RS1: LEDs	Ordinary person	N/A	N/A	N/A

Supplementary Information:

<sup>&</sup>quot;B" - Basic Safeguard; "S" - Supplementary Safeguard; "R" - Reinforced Safeguard

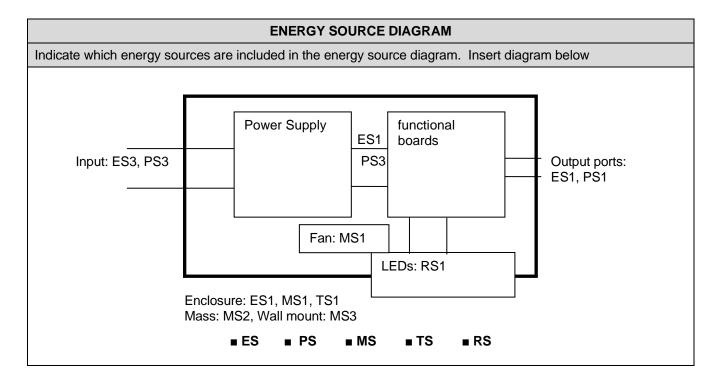

		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

4	GENERAL REQUIREMENTS			
4.1.1	Acceptance of materials, components and subassemblies		Р	
4.1.2	Use of components	Certified components are used in accordance with their ratings, certifications and they comply with applicable parts of this standard.	Р	
		Components not certified are used in accordance with their ratings and they comply with applicable parts of this standard and the relevant component standard.		
		Components, for which no relevant IEC-standard exists, have been tested under the conditions occurring in the equipment, using applicable parts of this standard.		
4.1.3	Equipment design and construction		Р	
4.1.4	Specified ambient temperature for outdoor use (°C)		N/A	
4.1.5	Constructions and components not specifically covered	No such part	N/A	
4.1.8	Liquids and liquid filled components (LFC)		N/A	
4.1.15	Markings and instructions	(See Annex F)	Р	
4.4.3	Safeguard robustness		Р	
4.4.3.1	General		Р	
4.4.3.2	Steady force tests	(See Annex T.5)	Р	
4.4.3.3	Drop tests		N/A	
4.4.3.4	Impact tests	(See Annex T.6)	Р	
4.4.3.5	Internal accessible safeguard tests		N/A	
4.4.3.6	Glass impact tests	(See Annex T.6)	Р	
4.4.3.7	Glass fixation tests		N/A	
	Glass impact test (1J)		N/A	
	Push/pull test (10 N)		N/A	
4.4.3.8	Thermoplastic material tests		N/A	
4.4.3.9	Air comprising a safeguard		N/A	
4.4.3.10	Accessibility, glass, safeguard effectiveness		Р	

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
4.4.4	Displacement of a safeguard by an insulating liquid		N/A
4.4.5	Safety interlocks		N/A
4.5	Explosion		Р
4.5.1	General		Р
4.5.2	No explosion during normal/abnormal operating condition	(See Clause B.2, B.3)	Р
	No harm by explosion during single fault conditions	(See Clause B.4)	Р
4.6	Fixing of conductors		N/A
	Fix conductors not to defeat a safeguard		N/A
	Compliance is checked by test:	(See Clause T.2)	N/A
4.7	Equipment for direct insertion into mains socket	-outlets	N/A
4.7.2	Mains plug part complies with relevant standard:		N/A
4.7.3	Torque (Nm)		N/A
4.8	Equipment containing coin/button cell batteries		Р
4.8.1	General		Р
4.8.2	Instructional safeguard:		Р
4.8.3	Battery compartment door/cover construction		N/A
	Open torque test		N/A
4.8.4.2	Stress relief test		N/A
4.8.4.3	Battery replacement test		N/A
4.8.4.4	Drop test		N/A
4.8.4.5	Impact test		Р
4.8.4.6	Crush test		N/A
4.8.5	Compliance		Р
	30N force test with test probe		Р
	20N force test with test hook		N/A
4.9	Likelihood of fire or shock due to entry of condu	ctive object	Р
4.10	Component requirements		Р
4.10.1	Disconnect Device	(See Annex L)	Р
4.10.2	Switches and relays		N/A

5	ELECTRICALLY-CAUSED INJURY		Р
5.2	Classification and limits of electrical energy source	es	Р
5.2.2	ES1, ES2 and ES3 limits		Р
5.2.2.2	Steady-state voltage and current limits:	(See appended table 5.2)	Р

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
5.2.2.3	Capacitance limits:	approved internal power supply	Р
5.2.2.4	Single pulse limits:		N/A
5.2.2.5	Limits for repetitive pulses:		N/A
5.2.2.6	Ringing signals		N/A
5.2.2.7	Audio signals		N/A
5.3	Protection against electrical energy sources		Р
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons		Р
5.3.1 a)	Accessible ES1/ES2 derived from ES2/ES3 circuits		N/A
5.3.1 b)	Skilled persons not unintentional contact ES3 bare conductors		Р
5.3.2.1	Accessibility to electrical energy sources and safeguards		Р
	Accessibility to outdoor equipment bare parts		N/A
5.3.2.2	Contact requirements		Р
	Test with test probe from Annex V		-
5.3.2.2 a)	Air gap – electric strength test potential (V):		N/A
5.3.2.2 b)	Air gap – distance (mm):		N/A
5.3.2.3	Compliance		Р
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	Insulation materials and requirements		Р
5.4.1.2	Properties of insulating material		Р
5.4.1.3	Material is non-hygroscopic	approved internal power supply	Р
5.4.1.4	Maximum operating temperature for insulating materials:	(See appended table)	Р
5.4.1.5	Pollution degrees:	2	Р
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling test		N/A
5.4.1.6	Insulation in transformers with varying dimensions		N/A
5.4.1.7	Insulation in circuits generating starting pulses		N/A
5.4.1.8	Determination of working voltage:	approved internal power supply	Р
5.4.1.9	Insulating surfaces		N/A
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		N/A
5.4.1.10.2	Vicat test:		N/A

	IEC 62368-1	T	1
Clause	Requirement + Test	Result - Remark	Verdict
5.4.1.10.3	Ball pressure test		N/A
5.4.2	Clearances	evaluated in internal power supply report	Р
5.4.2.1	General requirements		Р
	Clearances in circuits connected to AC Mains, Alternative method		N/A
5.4.2.2	Procedure 1 for determining clearance	(See appended table 5.4.2.2)	Р
	Temporary overvoltage	(See appended table 5.4.2.3)	
5.4.2.3	Procedure 2 for determining clearance		Р
5.4.2.3.2.2	a.c. mains transient voltage	2500Vpk	_
5.4.2.3.2.3	d.c. mains transient voltage:		
5.4.2.3.2.4	External circuit transient voltage:		
5.4.2.3.2.5	Transient voltage determined by measurement:		_
5.4.2.4	Determining the adequacy of a clearance using an electric strength test:		N/A
5.4.2.5	Multiplication factors for clearances and test voltages		N/A
5.4.2.6	Clearance measurement	(See appended table 5.4.2)	N/A
5.4.3	Creepage distances	(See appended table 5.4.3)	Р
5.4.3.1	General		Р
5.4.3.3	Material group:	IIIb	_
5.4.3.4	Creepage distances measurement		N/A
5.4.4	Solid insulation		N/A
5.4.4.1	General requirements		N/A
5.4.4.2	Minimum distance through insulation:	(See appended table 5.4.4.2)	N/A
5.4.4.3	Insulating compound forming solid insulation		N/A
5.4.4.4	Solid insulation in semiconductor devices		N/A
5.4.4.5	Insulating compound forming cemented joints		N/A
5.4.4.6	Thin sheet material		N/A
5.4.4.6.1	General requirements		N/A
5.4.4.6.2	Separable thin sheet material		N/A
	Number of layers (pcs):		N/A
5.4.4.6.3	Non-separable thin sheet material		N/A
	Number of layers (pcs):		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material	(See appended table 5.4.9)	N/A

	IEC 62368-1	T	
Clause	Requirement + Test	Result - Remark	Verdict
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components		N/A
5.4.4.9	Solid insulation at frequencies >30 kHz, <i>E</i> <sub>P</sub> , <i>K</i> <sub>R</sub> , <i>d</i> , <i>V</i> <sub>PW</sub> (V)	(See appended Table 5.4.4.9)	N/A
	Alternative by electric strength test, tested voltage (V), $K_R$		N/A
5.4.5	Antenna terminal insulation		N/A
5.4.5.1	General		N/A
5.4.5.2	Voltage surge test		N/A
5.4.5.3	Insulation resistance (MΩ):		N/A
	Electric strength test		N/A
5.4.6	Insulation of internal wire as part of supplementary safeguard		N/A
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning		N/A
	Relative humidity (%), temperature (°C), duration (h):		_
5.4.9	Electric strength test		Р
5.4.9.1	Test procedure for type test of solid insulation:	(See appended table 5.4.9)	N/A
5.4.9.2	Test procedure for routine test		N/A
5.4.10	Safeguards against transient voltages from external circuits		N/A
5.4.10.1	Parts and circuits separated from external circuits		N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test:		N/A
5.4.10.2.3	Steady-state test:		N/A
5.4.10.3	Verification for insulation breakdown for impulse test:		N/A
5.4.11	Separation between external circuits and earth		N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	SPDs bridge separation between external circuit and earth		N/A
	Rated operating voltage U <sub>op</sub> (V):		_
	Nominal voltage U <sub>peak</sub> (V):		_

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
	Max increase due to variation ΔU <sub>sp</sub> :		_
	Max increase due to ageing ΔUsa:		_
5.4.11.3	Test method and compliance:		N/A
5.4.12	Insulating liquid		N/A
5.4.12.1	General requirements		N/A
5.4.12.2	Electric strength of an insulating liquid:		N/A
5.4.12.3	Compatibility of an insulating liquid:		N/A
5.4.12.4	Container for insulating liquid:		N/A
5.5	Components as safeguards		N/A
5.5.1	General	approved internal power supply	N/A
5.5.2	Capacitors and RC units		N/A
5.5.2.1	General requirement		N/A
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector:		N/A
5.5.3	Transformers		N/A
5.5.4	Optocouplers		N/A
5.5.5	Relays		N/A
5.5.6	Resistors		N/A
5.5.7	SPDs		N/A
5.5.8	Insulation between the mains and an external circuit consisting of a coaxial cable:		N/A
5.5.9	Safeguards for socket-outlets in outdoor equipment		N/A
	RCD rated residual operating current (mA):		_
5.6	Protective conductor		Р
5.6.2	Requirement for protective conductors	evaluated in internal power supply report	Р
5.6.2.1	General requirements		Р
5.6.2.2	Colour of insulation		Р
5.6.3	Requirement for protective earthing conductors	Certified AC inlet	Р
	Protective earthing conductor size (mm²):	min. 0,75	_
	Protective earthing conductor serving as a reinforced safeguard		N/A
	Protective earthing conductor serving as a double safeguard		N/A
5.6.4	Requirements for protective bonding conductors		Р
5.6.4.1	Protective bonding conductors		Р

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
	Protective bonding conductor size (mm²):	See table 4.1.2	
5.6.4.2	Protective current rating (A):	<25A	N/A
5.6.5	Terminals for protective conductors		N/A
5.6.5.1	Terminal size for connecting protective earthing conductors (mm):		N/A
	Terminal size for connecting protective bonding conductors (mm):		N/A
5.6.5.2	Corrosion		N/A
5.6.6	Resistance of the protective bonding system		Р
5.6.6.1	Requirements		Р
5.6.6.2	Test Method	(See appended table 5.6.6)	Р
5.6.6.3	Resistance ( $\Omega$ ) or voltage drop:	(See appended table 5.6.6)	Р
5.6.7	Reliable connection of a protective earthing conductor		N/A
5.6.8	Functional earthing		N/A
	Conductor size (mm²):		N/A
	Class II with functional earthing marking:		N/A
	Appliance inlet cl & cr (mm):		N/A
5.7	Prospective touch voltage, touch current and pro	otective conductor current	Р
5.7.2	Measuring devices and networks		Р
5.7.2.1	Measurement of touch current	evaluated in internal power supply report	Р
5.7.2.2	Measurement of voltage		N/A
5.7.3	Equipment set-up, supply connections and earth connections		Р
5.7.4	Unearthed accessible parts:		N/A
5.7.5	Earthed accessible conductive parts:	(See appended table 5.7.5)	Р
5.7.6	Requirements when touch current exceeds ES2 limits		N/A
	Protective conductor current (mA)		N/A
	Instructional Safeguard:		N/A
5.7.7	Prospective touch voltage and touch current associated with external circuits		N/A
5.7.7.1	Touch current from coaxial cables		N/A
5.7.7.2	Prospective touch voltage and touch current associated with paired conductor cables		N/A
5.7.8	Summation of touch currents from external circuits		N/A

	IEC 62368-1				
Clause	Requirement + Test	Result - Remark	Verdict		
	a) Equipment connected to earthed external circuits, current (mA):		N/A		
	b) Equipment connected to unearthed external circuits, current (mA):		N/A		
5.8	Backfeed safeguard in battery backed up supplie	es	N/A		
	Mains terminal ES	(See appended table 5.8)	N/A		
	Air gap (mm)		N/A		

6	ELECTRICALLY- CAUSED FIRE		Р
6.2	Classification of PS and PIS		Р
6.2.2	Power source circuit classifications:	The internal circuit is considered as PS3 without test.	Р
6.2.3	Classification of potential ignition sources		Р
6.2.3.1	Arcing PIS	(See appended table 6.2.3.1)	Р
6.2.3.2	Resistive PIS	(See appended table 6.2.3.2)	Р
6.3	Safeguards against fire under normal operating a conditions	nd abnormal operating	Р
6.3.1	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials:	(See appended table B.1.5 and B.3)	Р
	Combustible materials outside fire enclosure:	The enclosure is metal and glass.	Р
6.4	Safeguards against fire under single fault conditions		Р
6.4.1	Safeguard method	Control fire spread.	Р
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits		N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits		N/A
6.4.3.1	Supplementary safeguards		N/A
6.4.3.2	Single Fault Conditions:	(See appended table B.4)	N/A
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		Р
6.4.5	Control of fire spread in PS2 circuits		N/A
6.4.5.2	Supplementary safeguards		N/A
6.4.6	Control of fire spread in PS3 circuits		Р
6.4.7	Separation of combustible materials from a PIS		N/A
6.4.7.2	Separation by distance		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers		Р
6.4.8.2	Fire enclosure and fire barrier material properties		Р
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure		Р
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		Р
6.4.8.3.1	Fire enclosure and fire barrier openings		Р
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top openings and properties		Р
	Openings dimensions (mm):	Top side:no openings.	Р
6.4.8.3.4	Bottom openings and properties		Р
	Openings dimensions (mm):	Bottom side:no openings.	Р
	Flammability tests for the bottom of a fire enclosure	(See Clause S.3)	N/A
	Instructional Safeguard:		N/A
6.4.8.3.5	Side openings and properties		Р
	Openings dimensions (mm):	Openings in rear side enclosure do not allow foreign objects entering the equipment to fall on bare parts.	Р
6.4.8.3.6	Integrity of a fire enclosure, condition met: a), b) or c):		N/A
6.4.8.4	Separation of a PIS from a fire enclosure and a fire barrier distance (mm) or flammability rating:	[ ] minimum 5mm from resistive PIS, [ X ] enclosure is metal or V-0	Р
6.4.9	Flammability of insulating liquid:	Control fire spread.	N/A
6.5	Internal and external wiring	1	Р
6.5.1	General requirements		Р
6.5.2	Requirements for interconnection to building wiring		N/A
6.5.3	Internal wiring size (mm²) for socket-outlets:		N/A
6.6	Safeguards against fire due to the connection to	additional equipment	Р

7	INJURY CAUSED BY HAZARDOUS SUBSTANCES	Р
7.2	Reduction of exposure to hazardous substances	N/A
7.3	Ozone exposure	N/A

	IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict	
7.4	Use of personal safeguards or personal protective equipment (PPE)		N/A	
	Personal safeguards and instructions:		_	
7.5	Use of instructional safeguards and instructions		N/A	
	Instructional safeguard (ISO 7010)		_	
7.6	Batteries and their protection circuits		Р	

8	MECHANICALLY-CAUSED INJURY		Р
8.2	Mechanical energy source classifications		Р
8.3	Safeguards against mechanical energy sources		Р
8.4	Safeguards against parts with sharp edges and corners		Р
8.4.1	Safeguards	No sharp edges or corners.	N/A
	Instructional Safeguard:		N/A
8.4.2	Sharp edges or corners		N/A
8.5	Safeguards against moving parts		Р
8.5.1	Fingers, jewellery, clothing, hair, etc., contact with MS2 or MS3 parts	The DC Fan is within the limits under normal and fault conditions.	N/A
		DC Fan EFC-09D12M in system:	
		K=6x10 <sup>-7</sup> (0,081 x 46 <sup>2</sup> x 2100 <sup>2</sup> ) =453,51	
		2100/15000+453,51/2400	
		=0,14+0,19	
		=0,33 < 1	
	MS2 or MS3 part required to be accessible for the function of the equipment		N/A
	Moving MS3 parts only accessible to skilled person		N/A
8.5.2	Instructional safeguard:		N/A
8.5.4	Special categories of equipment containing moving parts		N/A
8.5.4.1	General		N/A
8.5.4.2	Equipment containing work cells with MS3 parts		N/A
8.5.4.2.1	Protection of persons in the work cell		N/A
8.5.4.2.2	Access protection override		N/A
8.5.4.2.2.1	Override system		N/A
8.5.4.2.2.2	Visual indicator		N/A

	IEC 62368-1	T	
Clause	Requirement + Test	Result - Remark	Verdict
8.5.4.2.3	Emergency stop system		N/A
	Maximum stopping distance from the point of activation (m)		N/A
	Space between end point and nearest fixed mechanical part (mm):		N/A
8.5.4.2.4	Endurance requirements		N/A
	Mechanical system subjected to 100 000 cycles of operation		N/A
	- Mechanical function check and visual inspection		N/A
	- Cable assembly		N/A
8.5.4.3	Equipment having electromechanical device for destruction of media		N/A
8.5.4.3.1	Equipment safeguards		N/A
8.5.4.3.2	Instructional safeguards against moving parts:		N/A
8.5.4.3.3	Disconnection from the supply		N/A
8.5.4.3.4	Cut type and test force (N)		N/A
8.5.4.3.5	Compliance		N/A
8.5.5	High pressure lamps		N/A
	Explosion test		N/A
8.5.5.3	Glass particles dimensions (mm)		N/A
8.6	Stability of equipment		N/A
8.6.1	General		N/A
	Instructional safeguard:		N/A
8.6.2	Static stability		N/A
8.6.2.2	Static stability test		N/A
8.6.2.3	Downward force test		N/A
8.6.3	Relocation stability		N/A
	Wheels diameter (mm):		_
	Tilt test		N/A
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test		N/A
8.7	Equipment mounted to wall, ceiling or other struc	ture	Р
8.7.1	Mount means type		Р
8.7.2	Test methods		Р
	Test 1, additional downwards force (N):		N/A

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
	Test 2, number of attachment points and test force (N)	197N	Р
	Test 3 Nominal diameter (mm) and applied torque (Nm)	5,85mm, 2,5Nm	Р
8.8	Handles strength		N/A
8.8.1	General		N/A
8.8.2	Handle strength test		N/A
	Number of handles:		_
	Force applied (N)		_
8.9	Wheels or casters attachment requirements	- 1	N/A
8.9.2	Pull test		N/A
8.10	Carts, stands and similar carriers		N/A
8.10.1	General		N/A
8.10.2	Marking and instructions		N/A
8.10.3	Cart, stand or carrier loading test		N/A
	Loading force applied (N)		N/A
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Force applied (N)		_
8.10.6	Thermoplastic temperature stability		N/A
8.11	Mounting means for slide-rail mounted equipmen	nt (SRME)	N/A
8.11.1	General		N/A
8.11.2	Requirements for slide rails		N/A
	Instructional Safeguard		N/A
8.11.3	Mechanical strength test		N/A
8.11.3.1	Downward force test, force (N) applied:		N/A
8.11.3.2	Lateral push force test		N/A
8.11.3.3	Integrity of slide rail end stops		N/A
8.11.4	Compliance		N/A
8.12	Telescoping or rod antennas		N/A
	Button/ball diameter (mm)		_

9	THERMAL BURN INJURY	Р
9.2	Thermal energy source classifications	Р
9.3	Touch temperature limits	Р

IEC 62368-1				
Clause	Requirement + Test Result - Remark			
9.3.1	Touch temperatures of accessible parts:	(See appended table)	Р	
9.3.2	Test method and compliance		Р	
9.4	Safeguards against thermal energy sources		Р	
9.5	Requirements for safeguards		Р	
9.5.1	Equipment safeguard		Р	
9.5.2	Instructional safeguard:		N/A	
9.6	Requirements for wireless power transmitters		N/A	
9.6.1	General		N/A	
9.6.2	Specification of the foreign objects		N/A	
9.6.3	Test method and compliance:	(See appended table 9.6)	N/A	

10	RADIATION		Р
10.2	Radiation energy source classification		Р
10.2.1	General classification		Р
	Lasers		_
	Lamps and lamp systems	RS1 for LEDs.	
	Image projectors:	No such part	
	X-Ray:	No such part	
	Personal music player:	No such part	_
10.3	Safeguards against laser radiation		N/A
	The standard(s) equipment containing laser(s) comply:		N/A
10.4	Safeguards against optical radiation from lamps and lamp systems (including LED types)		Р
10.4.1	General requirements		Р
	Instructional safeguard provided for accessible radiation level needs to exceed		Р
	Risk group marking and location	RS1 for LEDs.	Р
	Information for safe operation and installation		Р
10.4.2	Requirements for enclosures		N/A
	UV radiation exposure		N/A
10.4.3	Instructional safeguard:		N/A
10.5	Safeguards against X-radiation		N/A
10.5.1	Requirements		N/A
	Instructional safeguard for skilled persons:		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.5.3	Maximum radiation (pA/kg):	(See appended tables B.3 & B.4)	_
10.6	Safeguards against acoustic energy sources		N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output L <sub>Aeq,T</sub> , dB(A):		N/A
	Unweighted RMS output voltage (mV)		N/A
	Digital output signal (dBFS):		N/A
10.6.3	Requirements for dose-based systems		N/A
10.6.3.1	General requirements		N/A
10.6.3.2	Dose-based warning and automatic decrease		N/A
10.6.3.3	Exposure-based warning and requirements		N/A
	30 s integrated exposure level (MEL30):		N/A
	Warning for MEL ≥ 100 dB(A):		N/A
10.6.4	Measurement methods		N/A
10.6.5	Protection of persons		N/A
	Instructional safeguards:		N/A
10.6.6	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.6.1	Corded listening devices with analogue input		N/A
	Listening device input voltage (mV):		N/A
10.6.6.2	Corded listening devices with digital input		N/A
	Max. acoustic output L <sub>Aeq,T</sub> , dB(A)		N/A
10.6.6.3	Cordless listening devices		N/A
	Max. acoustic output L <sub>Aeq,T</sub> , dB(A):		N/A

В	NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS		Р
B.1	General	General	
B.1.5	Temperature measurement conditions (See appended table B.1.5)		Р
B.2	Normal operating conditions	Normal operating conditions	
B.2.1	General requirements:	(See Test Item Particulars and appended test tables)	Р
	Audio Amplifiers and equipment with audio amplifiers:		N/A
B.2.3	Supply voltage and tolerances	10%	Р

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
B.2.5	Input test:	(See appended table B.2.5)	Р
B.3	Simulated abnormal operating conditions		Р
B.3.1	General		Р
B.3.2	Covering of ventilation openings	(See appended table B.3)	Р
	Instructional safeguard:		Р
B.3.3	DC mains polarity test		N/A
B.3.4	Setting of voltage selector		N/A
B.3.5	Maximum load at output terminals		Р
B.3.6	Reverse battery polarity		N/A
B.3.7	Audio amplifier abnormal operating conditions		N/A
B.3.8	Safeguards functional during and after abnormal operating conditions:	(See appended table B.3)	Р
B.4	Simulated single fault conditions		Р
B.4.1	General		Р
B.4.2	Temperature controlling device		N/A
B.4.3	Blocked motor test	DC fan	Р
B.4.4	Functional insulation		N/A
B.4.4.1	Short circuit of clearances for functional insulation		N/A
B.4.4.2	Short circuit of creepage distances for functional insulation		N/A
B.4.4.3	Short circuit of functional insulation on coated printed boards		N/A
B.4.5	Short-circuit and interruption of electrodes in tubes and semiconductors		N/A
B.4.6	Short circuit or disconnection of passive components		Р
B.4.7	Continuous operation of components		N/A
B.4.8	Compliance during and after single fault conditions	(See appended table B.4)	Р
B.4.9	Battery charging and discharging under single fault conditions		Р
С	UV RADIATION		N/A
C.1	Protection of materials in equipment from UV rac	diation	N/A
C.1.2	Requirements		N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus:		N/A

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure test		N/A
C.2.4	Xenon-arc light-exposure test		N/A
D	TEST GENERATORS		N/A
D.1	Impulse test generators		N/A
D.2	Antenna interface test generator		N/A
D.3	Electronic pulse generator		N/A
E	TEST CONDITIONS FOR EQUIPMENT CONTAINII	NG AUDIO AMPLIFIERS	N/A
E.1	Electrical energy source classification for audio	signals	N/A
	Maximum non-clipped output power (W):		_
	Rated load impedance (Ω):		_
	Open-circuit output voltage (V):		_
	Instructional safeguard:		_
E.2	Audio amplifier normal operating conditions		N/A
	Audio signal source type:		_
	Audio output power (W):		_
	Audio output voltage (V):		_
	Rated load impedance (Ω):		_
	Requirements for temperature measurement		N/A
E.3	Audio amplifier abnormal operating conditions		N/A
F	EQUIPMENT MARKINGS, INSTRUCTIONS, AND I SAFEGUARDS	NSTRUCTIONAL	Р
F.1	General		Р
	Language:	With all target countries local language	
F.2	Letter symbols and graphical symbols		Р
F.2.1	Letter symbols according to IEC60027-1	The Unit of Voltage, Current and frequency used.	Р
F.2.2	Graphic symbols according to IEC, ISO or manufacturer specific		Р
F.3	Equipment markings		Р
F.3.1	Equipment marking locations		Р
F.3.2	Equipment identification markings		Р
F.3.2.1	Manufacturer identification:	See copy of marking plate	Р
F.3.2.2	Model identification:	See copy of marking plate	Р

	IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict	
F.3.3	Equipment rating markings		Р	
F.3.3.1	Equipment with direct connection to mains		Р	
F.3.3.2	Equipment without direct connection to mains		N/A	
F.3.3.3	Nature of the supply voltage:	AC	Р	
F.3.3.4	Rated voltage:	See copy of marking plate	Р	
F.3.3.5	Rated frequency:	50/60Hz	Р	
F.3.3.6	Rated current or rated power:	See copy of marking plate	Р	
F.3.3.7	Equipment with multiple supply connections		Р	
F.3.4	Voltage setting device		N/A	
F.3.5	Terminals and operating devices		N/A	
F.3.5.1	Mains appliance outlet and socket-outlet markings		N/A	
F.3.5.2	Switch position identification marking:		N/A	
F.3.5.3	Replacement fuse identification and rating markings		N/A	
	Instructional safeguards for neutral fuse:		N/A	
F.3.5.4	Replacement battery identification marking:		N/A	
F.3.5.5	Neutral conductor terminal		N/A	
F.3.5.6	Terminal marking location		N/A	
F.3.6	Equipment markings related to equipment classification		Р	
F.3.6.1	Class I equipment		Р	
F.3.6.1.1	Protective earthing conductor terminal:	Certified appliance inlet used.	Р	
F.3.6.1.2	Protective bonding conductor terminals:		N/A	
F.3.6.2	Equipment class marking:		N/A	
F.3.6.3	Functional earthing terminal marking:		N/A	
F.3.7	Equipment IP rating marking:	IPX0 not marked	N/A	
F.3.8	External power supply output marking:		N/A	
F.3.9	Durability, legibility and permanence of marking	The label was subject to the permanence of marking test. The label was rubbed with cloth soaked with water for 15 sec. And then again for 15 sec. with cloth soaked with petroleum spirit. After this test there was no damage to the label. The marking on the label did not fade. There was no curling and lifting of the label edge.	P	

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
F.3.10	Test for permanence of markings		Р
F.4	Instructions	1	Р
	a) Information prior to installation and initial use		Р
	b) Equipment for use in locations where children not likely to be present		N/A
	c) Instructions for installation and interconnection		N/A
	d) Equipment intended for use only in restricted access area		N/A
	e) Equipment intended to be fastened in place		N/A
	f) Instructions for audio equipment terminals		N/A
	g) Protective earthing used as a safeguard		Р
	h) Protective conductor current exceeding ES2 limits		N/A
	i) Graphic symbols used on equipment	See marking plate for detail	Р
	j) Permanently connected equipment not provided with all-pole mains switch		N/A
	k) Replaceable components or modules providing safeguard function		N/A
	I) Equipment containing insulating liquid		N/A
	m) Installation instructions for outdoor equipment		N/A
F.5	Instructional safeguards	1	Р
G	COMPONENTS		Р
G.1	Switches		Р
G.1.1	General		Р
G.1.2	Ratings, endurance, spacing, maximum load	See table 4.1.2	Р
G.1.3	Test method and compliance		N/A
G.2	Relays		N/A
G.2.1	Requirements	See table 4.1.2	N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supplying power to other equipment		N/A

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
G.2.4	Test method and compliance		N/A
G.3	Protective devices		N/A
G.3.1	Thermal cut-offs		N/A
	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Test method and compliance		N/A
G.3.2	Thermal links		N/A
G.3.2.1	a) Thermal links tested separately according to IEC 60691 with specifics		N/A
	b) Thermal links tested as part of the equipment		N/A
G.3.2.2	Test method and compliance		N/A
G.3.3	PTC thermistors		N/A
G.3.4	Overcurrent protection devices		N/A
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.4		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions:	(See appended table B.4)	N/A
G.4	Connectors		Р
G.4.1	Spacings		Р
G.4.2	Mains connector configuration:	The appliance inlet complied with IEC 60320-1	Р
G.4.3	Plug is shaped that insertion into mains socket- outlets or appliance coupler is unlikely		N/A
G.5	Wound components		Р
G.5.1	Wire insulation in wound components		N/A
G.5.1.2	Protection against mechanical stress		N/A
G.5.2	Endurance test		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Test time (days per cycle):		
	Test temperature (°C):		_
G.5.2.3	Wound components supplied from the mains		N/A
G.5.2.4	No insulation breakdown		N/A
G.5.3	Transformers		N/A

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
G.5.3.1	Compliance method:		N/A
	Position:		N/A
	Method of protection:		N/A
G.5.3.2	Insulation		N/A
	Protection from displacement of windings:		_
G.5.3.3	Transformer overload tests		N/A
G.5.3.3.1	Test conditions		N/A
G.5.3.3.2	Winding temperatures		N/A
G.5.3.3.3	Winding temperatures - alternative test method		N/A
G.5.3.4	Transformers using FIW		N/A
G.5.3.4.1	General		N/A
	FIW wire nominal diameter:		_
G.5.3.4.2	Transformers with basic insulation only		N/A
G.5.3.4.3	Transformers with double insulation or reinforced insulation:		N/A
G.5.3.4.4	Transformers with FIW wound on metal or ferrite core		N/A
G.5.3.4.5	Thermal cycling test and compliance		N/A
G.5.3.4.6	Partial discharge test		N/A
G.5.3.4.7	Routine test		N/A
G.5.4	Motors		Р
G.5.4.1	General requirements	DC fan	Р
G.5.4.2	Motor overload test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4.2	Locked-rotor overload test		N/A
	Test duration (days)		_
G.5.4.5	Running overload test for DC motors		N/A
G.5.4.5.2	Tested in the unit		N/A
G.5.4.5.3	Alternative method		N/A
G.5.4.6	Locked-rotor overload test for DC motors		Р
G.5.4.6.2	Tested in the unit		Р
	Maximum Temperature:	(See table B.3,B.4)	Р
G.5.4.6.3	Alternative method		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
G.5.4.9	Series motors		N/A
	Operating voltage:		
G.6	Wire Insulation		N/A
G.6.1	General	See G.5 for insulation in wound component.	N/A
G.6.2	Enamelled winding wire insulation		N/A
G.7	Mains supply cords		Р
G.7.1	General requirements		Р
	Type:		
G.7.2	Cross sectional area (mm² or AWG):	See critical components table	Р
G.7.3	Cord anchorages and strain relief for non- detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N):		N/A
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm):		N/A
G.7.3.2.4	Strain relief and cord anchorage material		N/A
G.7.4	Cord Entry		N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Test method and compliance		N/A
	Overall diameter or minor overall dimension, <i>D</i> (mm):		_
	Radius of curvature after test (mm):		
G.7.6	Supply wiring space		N/A
G.7.6.1	General requirements		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Requirements		N/A
G.7.6.2.2	Test with 8 mm strand		N/A
G.8	Varistors		N/A
G.8.1	General requirements		N/A
G.8.2	Safeguards against fire		N/A
G.8.2.1	General		N/A
G.8.2.2	Varistor overload test	Metal enclosure	N/A

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
G.8.2.3	Temporary overvoltage test		N/A
G.9	Integrated circuit (IC) current limiters		Р
G.9.1	Requirements		Р
	IC limiter output current (max. 5A):	1100 mA	_
	Manufacturers' defined drift:		_
G.9.2	Test Program		N/A
G.9.3	Compliance		N/A
G.10	Resistors	1	N/A
G.10.1	General		N/A
G.10.2	Conditioning		N/A
G.10.3	Resistor test		N/A
G.10.4	Voltage surge test		N/A
G.10.5	Impulse test		N/A
G.10.6	Overload test		N/A
G.11	Capacitors and RC units		N/A
G.11.1	General requirements		N/A
G.11.2	Conditioning of capacitors and RC units		N/A
G.11.3	Rules for selecting capacitors		N/A
G.12	Optocouplers		N/A
	Optocouplers comply with IEC 60747-5-5 with specifics		N/A
	Type test voltage V <sub>ini,a</sub> :		_
	Routine test voltage, V <sub>ini, b</sub> :		
G.13	Printed boards		Р
G.13.1	General requirements		Р
G.13.2	Uncoated printed boards		Р
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation:		N/A
	Number of insulation layers (pcs):		_
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2	Test method and compliance		N/A

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
G.14	Coating on components terminals		N/A
G.14.1	Requirements:		N/A
G.15	Pressurized liquid filled components		N/A
G.15.1	Requirements		N/A
G.15.2	Test methods and compliance		N/A
G.15.2.1	Hydrostatic pressure test		N/A
G.15.2.2	Creep resistance test		N/A
G.15.2.3	Tubing and fittings compatibility test		N/A
G.15.2.4	Vibration test		N/A
G.15.2.5	Thermal cycling test		N/A
G.15.2.6	Force test		N/A
G.15.3	Compliance		N/A
G.16	IC including capacitor discharge function (ICX)		N/A
G.16.1	Condition for fault tested is not required	No such part	N/A
	ICX with associated circuitry tested in equipment		N/A
	ICX tested separately		N/A
G.16.2	Tests		N/A
	Smallest capacitance and smallest resistance specified by ICX manufacturer for impulse test:		_
	Mains voltage that impulses to be superimposed on:		_
	Largest capacitance and smallest resistance for ICX tested by itself for 10000 cycles test:		_
G.16.3	Capacitor discharge test:		N/A
Н	CRITERIA FOR TELEPHONE RINGING SIGNALS		N/A
H.1	General		N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringing signal		N/A
H.3.1.1	Frequency (Hz):		_
H.3.1.2	Voltage (V):		_
H.3.1.3	Cadence; time (s) and voltage (V):		_
H.3.1.4	Single fault current (mA)::		_
H.3.2	Tripping device and monitoring voltage		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V):		N/A
J	INSULATED WINDING WIRES FOR USE WITHOU	T INTERLEAVED INSULATION	N/A
J.1	General		N/A
	Winding wire insulation:		
	Solid round winding wire, diameter (mm):		N/A
	Solid square and rectangular (flatwise bending) winding wire, cross-sectional area (mm²):		N/A
J.2/J.3	Tests and Manufacturing	(See separate test report)	
K	SAFETY INTERLOCKS		N/A
K.1	General requirements		N/A
	Instructional safeguard:		N/A
K.2	Components of safety interlock safeguard mechanism		N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
K.5.1	Under single fault condition		N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Test method and compliance:		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements		N/A
	In circuit connected to mains, separation distance for contact gaps (mm):		N/A
	In circuit isolated from mains, separation distance for contact gaps (mm):		N/A
	Electric strength test before and after the test of K.7.2:		N/A
K.7.2	Overload test, Current (A):		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test		N/A
L	DISCONNECT DEVICES		Р
L.1	General requirements		Р
L.2	Permanently connected equipment		N/A
L.3	Parts that remain energized		Р

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
L.4	Single-phase equipment	Appliance inlet	Р
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices		N/A
L.8	Multiple power sources		N/A
	Instructional safeguard:		N/A
М	EQUIPMENT CONTAINING BATTERIES AND THE	IR PROTECTION CIRCUITS	Р
M.1	General requirements	General requirements	
M.2	Safety of batteries and their cells		Р
M.2.1	Batteries and their cells comply with relevant IEC standards:		Р
M.3	Protection circuits for batteries provided within the equipment		Р
M.3.1	Requirements		Р
M.3.2	Test method		Р
	Overcharging of a rechargeable battery		N/A
	Excessive discharging		N/A
	Unintentional charging of a non-rechargeable battery		Р
	Reverse charging of a rechargeable battery		Р
M.3.3	Compliance	(See appended Tables and Annex M and M.4)	Р
M.4	Additional safeguards for equipment containing a portable secondary lithium battery		N/A
M.4.1	General	[ x ] The battery is not rechargeable	N/A
		[ ] The average resistance of the lithium coin battery is larger than $3\Omega$ according to IEC 62133-2 Annex D.	
M.4.2	Charging safeguards		N/A
M.4.2.1	Requirements		N/A
M.4.2.2	Compliance ::	(See appended table M.4.2)	N/A
M.4.3	Fire enclosure:		N/A
M.4.4	Drop test of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation and procedure for the drop test		N/A

	IEC 62368-1	
Clause	Requirement + Test Result - Remark	Verdict
M.4.4.3	Drop, Voltage on reference and dropped batteries (V); voltage difference during 24 h period (%)::	N/A
M.4.4.4	Check of the charge/discharge function	N/A
M.4.4.5	Charge / discharge cycle test	N/A
M.4.4.6	Compliance	N/A
M.5	Risk of burn due to short-circuit during carrying	N/A
M.5.1	Requirement	N/A
M.5.2	Test method and compliance	N/A
M.6	Safeguards against short-circuits	Р
M.6.1	External and internal faults	Р
M.6.2	Compliance	Р
M.7	Risk of explosion from lead acid and NiCd batteries	N/A
M.7.1	Ventilation preventing explosive gas concentration	N/A
	Calculated hydrogen generation rate:	N/A
M.7.2	Test method and compliance	N/A
	Minimum air flow rate, Q (m³/h):	N/A
M.7.3	Ventilation tests	N/A
M.7.3.1	General	N/A
M.7.3.2	Ventilation test – alternative 1	N/A
	Hydrogen gas concentration (%):	N/A
M.7.3.3	Ventilation test – alternative 2	N/A
	Obtained hydrogen generation rate:	N/A
M.7.3.4	Ventilation test – alternative 3	N/A
	Hydrogen gas concentration (%):	N/A
M.7.4	Marking:	N/A
M.8	Protection against internal ignition from external spark sources of batteries with aqueous electrolyte	N/A
M.8.1	General	N/A
M.8.2	Test method	N/A
M.8.2.1	General	N/A
M.8.2.2	Estimation of hypothetical volume $V_Z$ (m³/s):	_
M.8.2.3	Correction factors:	_
M.8.2.4	Calculation of distance d (mm):	_
M.9	Preventing electrolyte spillage	N/A
M.9.1	Protection from electrolyte spillage	N/A

	IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict	
M.9.2	Tray for preventing electrolyte spillage		N/A	
M.10	Instructions to prevent reasonably foreseeable misuse		N/A	
	Instructional safeguard:		N/A	
N	ELECTROCHEMICAL POTENTIALS		N/A	
	Material(s) used:			
0	MEASUREMENT OF CREEPAGE DISTANCES ANI	D CLEARANCES	N/A	
	Value of X (mm):		_	
Р	SAFEGUARDS AGAINST CONDUCTIVE OBJECTS	3	Р	
P.1	General		Р	
P.2	Safeguards against entry or consequences of entry of a foreign object			
P.2.1	General		Р	
P.2.2	Safeguards against entry of a foreign object		Р	
	Location and Dimensions (mm):	Openings in rear side enclosure do not allow foreign objects entering the equipment to fall on bare parts.	_	
P.2.3	Safeguards against the consequences of entry of a foreign object		N/A	
P.2.3.1	Safeguard requirements		N/A	
	The ES3 and PS3 keep-out volume in Figure P.3 not applicable to transportable equipment		N/A	
	Transportable equipment with metalized plastic parts:		N/A	
P.2.3.2	Consequence of entry test:		N/A	
P.3	Safeguards against spillage of internal liquids		N/A	
P.3.1	General		N/A	
P.3.2	Determination of spillage consequences		N/A	
P.3.3	Spillage safeguards		N/A	
P.3.4	Compliance		N/A	
P.4	Metallized coatings and adhesives securing parts	<b>S</b>	N/A	
P.4.1	General		N/A	
P.4.2	Tests		N/A	
	Conditioning, T <sub>C</sub> (°C):		_	
	Duration (weeks):		_	
Q	CIRCUITS INTENDED FOR INTERCONNECTION W	WITH BUILDING WIRING	Р	
Q.1	Limited power sources		Р	

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
Q.1.1	Requirements		Р
	a) Inherently limited output		N/A
	b) Impedance limited output		N/A
	c) Regulating network limited output		N/A
	d) Overcurrent protective device limited output		N/A
	e) IC current limiter complying with G.9		Р
Q.1.2	Test method and compliance:	(See appended table Q.1)	Р
	Current rating of overcurrent protective device (A)		N/A
Q.2	Test for external circuits – paired conductor cable		N/A
	Maximum output current (A):		N/A
	Current limiting method:		
R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General		N/A
R.2	Test setup		N/A
	Overcurrent protective device for test:		_
R.3	Test method		N/A
	Cord/cable used for test:		
R.4	Compliance		N/A
S	TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
S.1	Flammability test for fire enclosures and fire barr where the steady state power does not exceed 4		N/A
	Samples, material:		
	Wall thickness (mm)		
	Conditioning (°C):		
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrie	er integrity	N/A
	Samples, material:		_
	Wall thickness (mm):		_
	Conditioning (°C):		

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
S.3	Flammability test for the bottom of a fire enclosu	re	N/A
S.3.1	Mounting of samples		N/A
S.3.2	Test method and compliance		N/A
	Mounting of samples:		_
	Wall thickness (mm):		_
S.4	Flammability classification of materials		N/A
S.5	Flammability test for fire enclosure materials of equipment with a steady state power exceeding 4 000 W		N/A
	Samples, material:		_
	Wall thickness (mm):		_
	Conditioning (°C)		
Т	MECHANICAL STRENGTH TESTS		Р
T.1	General		Р
T.2	Steady force test, 10 N:		N/A
T.3	Steady force test, 30 N:		N/A
T.4	Steady force test, 100 N:		N/A
T.5	Steady force test, 250 N:	(See appended table T.5)	Р
T.6	Enclosure impact test	(See appended table T.6)	Р
	Fall test		Р
	Swing test		N/A
T.7	Drop test:		N/A
T.8	Stress relief test:		N/A
T.9	Glass Impact Test:	(See table T.6,T.9)	Р
T.10	Glass fragmentation test		N/A
	Number of particles counted:		N/A
T.11	Test for telescoping or rod antennas	,	N/A
	Torque value (Nm):		N/A
U	MECHANICAL STRENGTH OF CATHODE RAY TU AGAINST THE EFFECTS OF IMPLOSION	BES (CRT) AND PROTECTION	N/A
U.1	General		N/A
	Instructional safeguard :		N/A
U.2	Test method and compliance for non-intrinsically	protected CRTs	N/A
U.3	Protective screen		N/A

	IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict	
٧	DETERMINATION OF ACCESSIBLE PARTS		Р	
V.1	Accessible parts of equipment		Р	
V.1.1	General	Not accessible without tool	Р	
V.1.2	Surfaces and openings tested with jointed test probes		Р	
V.1.3	Openings tested with straight unjointed test probes		Р	
V.1.4	Plugs, jacks, connectors tested with blunt probe	No such plugs, jacks, connectors	N/A	
V.1.5	Slot openings tested with wedge probe		N/A	
V.1.6	Terminals tested with rigid test wire		Р	
V.2	Accessible part criterion		Р	
X	ALTERNATIVE METHOD FOR DETERMINING CLE CIRCUITS CONNECTED TO AN AC MAINS NOT EX RMS)		N/A	
	Clearance:	(See appended table X)	N/A	
Υ	CONSTRUCTION REQUIREMENTS FOR OUTDOOR ENCLOSURES			
Y.1	General		N/A	
Y.2	Resistance to UV radiation		N/A	
Y.3	Resistance to corrosion		N/A	
Y.3	Resistance to corrosion		N/A	
Y.3.1	Metallic parts of outdoor enclosures are resistant to effects of water-borne contaminants by:		N/A	
Y.3.2	Test apparatus		N/A	
Y.3.3	Water – saturated sulphur dioxide atmosphere		N/A	
Y.3.4	Test procedure:		N/A	
Y.3.5	Compliance		N/A	
Y.4	Gaskets		N/A	
Y.4.1	General		N/A	
Y.4.2	Gasket tests		N/A	
Y.4.3	Tensile strength and elongation tests		N/A	
	Alternative test methods:		N/A	
Y.4.4	Compression test		N/A	
Y.4.5	Oil resistance		N/A	
Y.4.6	Securing means	(See Annex P.4)	N/A	
Y.5	Protection of equipment within an outdoor enclos	ure	N/A	
Y.5.1	General		N/A	
Y.5.2	Protection from moisture		N/A	

IEC 62368-1					
Clause	Requirement + Test	Result - Remark	Verdict		
	Relevant tests of IEC 60529 or Y.5.3:		N/A		
Y.5.3	Water spray test		N/A		
Y.5.4	Protection from plants and vermin		N/A		
Y.5.5	Protection from excessive dust		N/A		
Y.5.5.1	General		N/A		
Y.5.5.2	IP5X equipment		N/A		
Y.5.5.3	IP6X equipment		N/A		
Y.6	Mechanical strength of enclosures		N/A		
Y.6.1	General		N/A		
Y.6.2	Impact test:	(See Table T.6)	N/A		

			<u> </u>	
		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

5.2	TABLE: Classification of electrical energy sources						N/A
Supply Location (e.g. circuit designation )		Test conditions	Parameters				ES Class
		U (V)	I (mA)	Type <sup>1)</sup>	Additional Info <sup>2)</sup>		

# Supplementary information:

- 1) Type: Steady state (SS), Capacitance (CP), Single pulse (SP), Repetitive pulses (RP), etc.
- 2) Additional Info: Frequency, Pulse duration, Pulse off time, Capacitance value, etc.

5.4.1.8 TABLE: Working voltage measurement						
Location		RMS voltage (V)	Peak voltage (V)	Frequency (Hz)	Comments	5
Supplementary information:						

5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics					N/A
Method			ISO 306 / B50		_	
Object/ Part No./Material Manufact		Manufacturer/trademark	-	Thickness (mm) T soft		ng (°C)
Supplementary information:						

5.4.1.10.3 TABLE: Bal	10.3 TABLE: Ball pressure test of thermoplastics					
Allowed impression diameter (mm) ≤ 2 mm						_
Object/Part No./Material Manufacturer/trademark		Thickness (mm)		Test temperature (°C)	Impression diameter (mm)	
Supplementary information:						
Phenolic material used.						

5.4.2, 5.4.3	TABLE: Minimum Clearances/Creepage distance	Р	ĺ
--------------	---	---	---

rago ri oi oo kapairita aa a									
				IEC 62	368-1				
Clause	Requirem	ent + Test				Result - Remark Verd			Verdict
Clearance (creepage dis(cr) at/of/bet	stance	U <sub>p</sub> (V)	U <sub>rms</sub> (V)	Freq 1) (Hz)	Required cl (mm)	cl (mm)	E.S. <sup>2)</sup> (V)	Required cr (mm)	cr (mm)
Functional:									
Basic/supple	Basic/supplementary:								
LP4 to meta enclosure	I	420	250	60	1,9	12,45		2,5	>12,45
Reinforced:									
Supplement	Supplementary information:								
Supplement	Supplementary information:								

5.4.4.2	TABLE: Minimun	TABLE: Minimum distance through insulation						
Distance through insulation (DTI) at/of		Peak voltage (V)	Insulation	Required DTI (mm)				
Supplement	ary information:							

5.4.4.9	TABLE: Solid insulation at frequencies >30 kHz						N/A
Insulation material		E₽	Frequency (kHz)	<b>K</b> R	Thickness d (mm)	Insulation	V <sub>PW</sub> (Vpk)
Supplement	ary information:						
For frequen	For frequencies >30 kHz:						

5.4.9	TABLE: Electric strength tests			Р
Test voltage	applied between:	Voltage shape (Surge, Impulse, AC, DC, etc.)	Test voltage (V)	Breakdown Yes / No
Functional:				
Basic/supple	ementary:			

Clause	Requirement + Test		Result - Remark	Verdict
L/N to pro	tective earthing	DC	2500	No
Reinforce	d:	1		<b>.</b>
L&N to en	closure	DC	4000	No
L&N to ou	tput terminals	DC	4000	No
Suppleme	entary information:			1

5.5.2.2	TABLE:	TABLE: Stored discharge on capacitors					
Location		Supply voltage (V)	Operating and fault condition 1)	Switch position	Measured voltage (Vpk)	ES Class	

### Supplementary information:

X-capacitors installed for testing are: See table 4.1.2.

- [x] bleeding resistor rating: See table 4.1.2
- [ ] ICX:
- 1) Normal operating condition (e.g., normal operation, or open fuse), SC= short circuit, OC= open circuit

5.6.6	TABLE: Resistance of protective conductors and terminations					Р	
Location		Test current (A)	Duration (min)	Voltage drop (V)	Re	sistance (Ω)	
Metal enclosure		32	2	0,352	(	0,011	
Supplement	Supplementary information:						

5.7.4	TABLE	E: Unearthed acces	ssible parts				N/A
Location	Operating and		Supply	F	ES		
		fault conditions	Voltage (V)	Voltage (V <sub>rms</sub> or V <sub>pk</sub> )	Current (A <sub>rms</sub> or A <sub>pk</sub> )	Freq. (Hz)	class
Supplementary information:							

5.7.5	TABLE: Earthed access	ble conductive part	Р
Supply voltage (V):		264	_
Phase(s):		[X ] Single Phase; [ ] Three Phase: [ ] Delta [ ] Wye	_
Power Distr	ibution System:	[X ] TN [x]TT [] IT	_

		IEC 62368-1	·	
Clause	Requirement + Test		Result - Remark	Verdict

	Fault Condition No in IEC 60990 clause 6.2.2	Touch current (mA)	Comment
Earthing Pin		0,315	

### Supplementary Information:

### Notes:

- [1] Supply voltage is the anticipated maximum Touch Voltage
- [2] Earthed neutral conductor [Voltage differences less than 1% or more]

5.8	TABLE: Backfeed safeguard in battery backed up supplies					N/A	
Location		Supply voltage (V)	Operating and fault condition	Time (s)	Open-circuit voltage (V)	Touch current (A)	ES Class
Supplement	Supplementary information:						
Abbreviation	Abbreviation: SC= short circuit, OC= open circuit						

6.2.2	TAB	LE: Power source	circuit classifica	tions			Р		
Location		Operating and fault condition	Voltage (V)	Current (A)	Max. Power <sup>1)</sup> (W)	Time (S)	PS class		
Internal circuits							PS3 without testing		
USB output		Normal	4,69	1,1	5,16	3	PS1		
HDMI outpu	ıt	Normal	0	0	0	3	PS1		
DP output No		Normal	0	0 0		3	PS1		
Supplementary information:									

6.2.3.1	TABLE: Determine	ΓABLE: Determination of Arcing PIS							
Location		Open circuit voltage after 3 s (Vpk)	Measured r.m.s current (A)	Calculated value	Arcing PIS? Yes / No				
All primary o	circuits					Yes			
Supplement	Supplementary information:								
All primary of	All primary circuits are considered as Arcing PIS without test.								

6.2.3.2	TABLE: Determin	TABLE: Determination of resistive PIS						
Location		Operating and fault condition	Dissipate power (W)		cing PIS? ′es / No			
All primary circuits					Yes			

Page 47 of 55

		150 00000 4	·	
		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

Supplementary information:

Abbreviation: SC= short circuit; OC= open circuit

All primary circuits are considered as Resistive PIS without test.

8.5.5	TABLE: High pressure lamp								
Lamp manufacturer		Lamp type	Explosion method	Longest axis of glass particle (mm)					
Supplementary information:									

9.6	TABLE	: Tempera	ture meas	urements	for wireles	s power t	ransmitter	s	N/A
Supply voltage (V):									_
Max. transmit power of transmitter (W):				:					_
					eiver and contact	with receiver and at distance of 2 mm			iver and at of 5 mm
Foreign ol	bjects	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)
Supplement	Supplementary information:								

			IEC 62368-1		
Clause	е	Requirement + Test		Result - Remark	Verdict

5.4.1.4, TABL	E: Tempe	rature mea	asurem	ent	S				Р		
9.3, B.1.5, B.2.6											
Supply voltage (V)	)		:		90VAC/6	0Hz	264VAC	C/50Hz	_		
Ambient temperate	ure during	test T <sub>amb</sub> (°C	C) :		25,0			0	_		
Maximum measur	ed tempera	iture <i>T</i> of p	art/at:	T (°C)					Allowed T <sub>max</sub> (°C)		
PCB near U201					63,8			1	130		
PCB near U1					63,9		63,	2	130		
AC inlet					44,1		42,	4	70		
Input wire					47,0		44,	7	80		
Input connector					54,0		48,	4	Ref		
X-cap CX1					52,8		47,	5	100		
LP2 coil					66,2		51,	2	130		
LP4 coil					76,1		58,6		130		
PCB near HS1					83,8		63,1		130		
PCB near QH6					68,8		64,2		130		
E-cap CP1					66,0		60,	0	105		
Photocoupler PH3	3				70,0		67,8		110		
TH1 bobbin					76,8		75,0		Ref		
TH1 coil					80,2		78,5		110		
Y-cap CY1					64,6		62,6		125		
PCB near DH16					67,2		65,9		130		
E-cap CH30					62,9		61,	6	105		
Output wire					55,1		54,	0	80		
PCB near UA1					58,2		57,	7	130		
BAT					46,0		44,	9	Ref		
Metal enclosure*					31,4		30,	6	70		
Glass enclosure*					27,4		26,	8	85		
Switch*					39,0		38,	8	77		
Temperature T of	winding:	t <sub>1</sub> (°C)	R <sub>1</sub> (Ω	2)	t <sub>2</sub> (°C)	R <sub>2</sub> (Ω)	T (°C)	Allowed T <sub>max</sub> (°C)	Insulation class		
Supplementary info	Supplementary information:										
* The test results of	* The test results of touchable surface temperature were considered base on ambient temperature 25°C.										

		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

Other measured temperature point list in this table has calculated to Tma (40°C).

B.2.5	TAI	BLE: Input	test						Р
U (V)	Hz	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
90	50	1,70		150,79		F1	1,70	Normal operation conditi	on.
90	60	1,70		150,93		F1	1,70		
100	50	1,52	5,0	149,27		F1	1,52		
100	60	1,50	5,0	149,01		F1	1,50		
240	50	0,67	5,0	143,80		F1	0,67		
240	60	0,66	5,0	143,65		F1	0,66		
264	50	0,65		143,62		F1	0,65		
264	60	0,64		143,42		F1	0,64		
Supplem	entary i	nformation:							

Equipment may be have rated current or rated power or both. Both should be measured

B.3, B.4 TA	ABLE: Abnormal	operating	and fault	condition t	ests		Р	
Ambient tempe	erature T <sub>amb</sub> (°C)			:	See belo	w	_	
Power source	for EUT: Manufact	tputrating:	See table	4.1.2	_			
Component No	. Condition	Supply voltage (V)	Test time	Fuse no.	Fuse current (A)	Observatio	n	
USB port	OI	90Vac	4,2hrs	F1	1,76-> 1,67	USB output load to 1,0A, EUT normal operation. USB output load to 1,1A, EUT shut down. No damaged, no hazards.		
						Max. temp. measured: TH1 bobbin = 63,2°C, TH1 coil = 67,6°C, PCB near HS1 = 72°C, Metal enclosure = 35,2°C, Ambient= 23,4°C.		
Ventilation openings	Blocked	90Vac	2,8hrs	F1	1,70	The EUT normal op No damaged, no ha		
						Max. temp. measur TH1 bobbin = 71,2° TH1 coil = 76°C, PCB near HS1 = 79 Metal enclosure = 4 Ambient= 23,9°C.	C, 9°C,	

				i age o	0 01 00		(cport 140. 00 L02 + 00	70001010
				IEC 62	368-1			
Clause	Requi	rement + Tes	t			Result - R	emark	Verdict
DC Fan	L	Locked	90Vac	13,1hrs	F1	1,67	The EUT normal open No damaged, no had Max. temp. measure TH1 bobbin = 75,7°C TH1 coil = 79,6°C, PCB near HS1 = 84, Metal enclosure = 4°C Ambient= 25,1°C.	zards. ed: C, ,1°C,
USB output	t S	Sc	264V	10mins	F1	0,63	USB shut down imm No damaged, no had higher temperature r	zards, no
CL29	S	Sc	264V	10mins	F1	0,63	DC fans shut down immediately. No damaged, no had higher temperature in	
CL5	S	Sc	264V	10mins	F1	0,60	Screen shut down immediately. No damaged, no had higher temperature in	
CW49	S	Sc	264V	10mins	F1	0,13	EUT shut down imm No damaged, no had higher temperature r	zards, no
Supplement	tary info	ormation:						
Sc: Short C	ircuit; C	Ol: overload C	Oc: Open Cir	cuit				

M.3	TABLE: Pro	otection circu	its f	or batteri	es provide	ed w	/ithin	the equ	ipment		Р
Is it possible t	to install the	battery in a rev	verse	e polarity p	osition?	:		N	lo		_
					Ch	argi	ng				
Equipment S	Equipment Specification		Vo	Itage (V)					Current (A)		
			100						4,0		
			Battery specification								
		Non-rechargeable batteries			Rechargeable batteries						
		Discharging Unintentional charging current (A)			C	har	ging		Discharging		Reverse
Manufacturer	/type			Voltage (V) Cur		Curr	ent (A)	current (A)		charging urrent (A)	
See table 4.1.	.2										
Note: The tes	ts of M.3.2 a	re applicable o	nly w	vhen above	e appropria	ite c	lata is	not avai	lable.		
Specified batt	tery tempera	ture (°C)				:		6	60		
Component No.	Fault condition	Charge/ discharge mo	-			rrent A)	Voltage (V)	Obse	rva	ntion	
CA103	SC	Dischargin	g	5min		2,2	2mA		NL, NS, N	Ε,	NF.

	rage 51 01 55					Keporti	NO. 30E32403	00001070		
IEC 62368-1										
Clause	Requirement	+ Test	Result - Remark			Verdict				
DA4 Pin 1-2	SC	Un-intentional charging	5min		2,2mA NL, NS, NE, NF.					
Supplement	Supplementary information:									
	Abbreviation: SC= short circuit; OC= open circuit NL= no chemical leakage; NS= no spillage of liquid; NE= no explosion; NF= no emission of flame or expulsion of molten metal.									

M.4.2	TABLE: battery	Charging saf	feguards for	equipment c	ontaining a s	econdary lithium	N/A	
Maximum sp	pecified c	harging voltag	e (V)		.:			
Maximum sp	Maximum specified charging current (A):							
Highest spec	Highest specified charging temperature (°C): :							
Lowest spec	cified cha	rging temperat	ure (°C)		.:			
Battery	Operating			Measurement		Observation	n	
manufacture	er/type	and fault condition	Charging voltage (V)	Charging current (A)	Temp. (°C)	•		

### Supplementary information:

Abbreviation: SC= short circuit; OC= open circuit; MSCV= maximum specified charging voltage; MSCC= maximum specified charging current; HSCT= highest specified charging temperature; LSCT= lowest specified charging temperature

Q.1	TABLE: Circ (LPS)	TABLE: Circuits intended for interconnection with building wiring (LPS)						
Output Circuit	Condition	11 (\)()	Time (a)	I <sub>sc</sub>	(A)	S (\	/A)	
Output Circuit	Condition	U <sub>oc</sub> (V)	Time (s)	Meas.	Limit	Meas.	Limit	
USB output	Normal	4,97	5	1,1	8	5,16	100	
HDMI output	Normal	4,87	5	0	8	0	100	
DP output	Normal	4,87	5	0	8	0	100	
Supplementary Information:								
USB ports is protected by IC limiter.								

T.2, T.3, T.4, T.5	TABLE	ABLE: Steady force test						Р
Part/Location	n	Material	Thickness (mm)	Probe	Force (N)	Test Duration (s)	Obse	rvation
Enclosu	ıre	Metal	Min. 0,8		250	5	In	tact
Supplementary information:								

		1 ago 02 01 00	110001111010000000000000000000000000000	
		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

T.6, T.9	TABLE: Imp	SLE: Impact test						
Location/part		Material Thickness (mm) Height (mm)		Observation				
Enclosure		Metal	Min. 0,8	1300	Intact			
Enclosure		Glass	Min. 1,0	1300	Intact			
Supplementary information:								

T.7	TABLE: Drop	ABLE: Drop test					
Location/part		Material	Thickness (mm)	Height (mm)	Observation	on	
Supplement	Supplementary information:						

T.8	TABLE	TABLE: Stress relief test							
Location/Part	t	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observ	/ation		
		-							
Supplementary information:									

Х	TABLE: Alternat	TABLE: Alternative method for determining minimum clearances distances					
Clearance distanced between:		Peak of working voltage (V)	Required cl (mm)	Measured cl (mm)			
Supplement	ary information:	1					

		<u> </u>	<u>'</u>		
		IEC 62368-1			
Clause	Requirement + Test		Result - Remark	Verdict	

4.1.2	TABLE	: List of critical con	nponents			Р
Object / part	No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1</sup>
Metal enclos	sure	Interchangeable	Interchangeable	Min. thickness 0,8mm	IEC62368-1:2018 EN IEC 62368- 1:2020+ A11:2020	Tested with equipment
Glass enclos	sure	Interchangeable	Interchangeable	Min. thickness 1,0mm	IEC62368-1:2018 EN IEC 62368- 1:2020+ A11:2020	Tested with equipment
Building-in p supply	ower	Shenzhen MEGMEET Electrical Co., Ltd	MLT186FL	Input: 100-240Vac, 50/60Hz, 4A Max. Class II Output: STB (+5VDC, 0,5A); V5(+5VDC, 2A); V12(+12VDC, 2,5A); V24(+24VDC, 8A); Total Output Power≤200W	IEC 60950- 1:2005/AMD2:20 13; IEC 60950-1- 2005/AMD1:200; IEC 60950- 1:2005	CQC CB Cert No: CN48054; Report No: SMQ-195425
RTC Battery		GUANGZHOU TIANQIU ENTERPRISE CO LTD	CR1220	3V d. c., 38mAh, Max abnormal charging Current 2,5mA, Max abnormal charging Voltage 3,5V	UL1642	UL MH48705
PCB board		GUANGZHOU FAST-PRINT CIRCUIT TECHNOLOGY CO LTD	M11	V-0, 130°C	UL 796 UL94	UL E204460
Alternative		VICTORY GIANT TECHNOLOGY (HUIZHOU) CO LTD	SH	V-0, 130°C	UL 796 UL94	UL E248779
Alternative		Interchangeable	Interchangeable	V-0 or better, 130°C	UL 796 UL94	UL
DC Fan		Shenzhen Dongweifeng Electronic Technology CO., LTD	EFC-09D12M	DC 12V 0,2A, 37,39CFM	EN 60950- 1:2006+A11+A1+ A12+A2	TUV R 50215667 This certificate is no longer valid.

Page 54 of 55

			<u>'</u>	
		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

Alternative	PROTECHNIC ELECTRIC	MGT9212LR- R20	DC 12V 0,1A, 32,57CFM	EN 62368- 1:2014/A11:2017	TUV B 031023 0137 Rev. 00
Large size display	BEIJING BOE DISPLAY TECHNOLOGY	DV460FHM- NV0	46 inch	IEC62368-1:2018 EN IEC 62368- 1:2020+ A11:2020	Tested with equipment
Fuses	XC ELECTRONICS (SHENZHEN) CORP LTD	5F6.3 F6.3L250V	AC 250 V; 250 mA; 315 mA; 500 mA; 630 mA; 800 mA; 1 A; 1,25 A; 1,6 A; 2 A; 2,5 A; 3,15 A; 4 A; 5 A; 6,3 A; 8 A; 10 A	DIN EN 60127- 1(VDE 0820- 1):2007-02; EN 60127-1:2006 DIN EN 60127- 2(VDE 0820 Teil 2):2004-04; EN 60127- 2:2003+A1:2003 IEC60127- 1(ed.2) IEC 60127- 2(ed.2);am1	VDE 40009609
Appliance inlet	ZHEJIANG LECI ELECTRONICS CO LTD	DB-14-F4	10A 250VAC	IN EN 60320-3 (VDE 0625- 3):2015-11; EN 60320-3:2014 IEC 60320- 1:2015 IEC 60320-3:2014 DIN EN 60320-1 (VDE 0625- 1):2016-04; EN 60320-1:2015 + AC:2016	VDE 40032137
Switch for appliance	ZHEJIANG LECI ELECTRONICS CO LTD	RS601 series	6A 250VAC	DIN EN60058- 1(VDE 0630- 1):2008-09: EN61058- 1:2002+A2:2008 IEC 61058- 1(ed.2);am1;am2	VDE 40017430
Power cord	Phino Electric Co., Ltd.	H05VV-F	3*0,75 mm <sup>2</sup>	DIN EN 50525- 2-11(VDE 0285- 525-2-1):2012-01 EN 50525-2-11	VDE Cert.: No:113841 Report No.1528500- 5140- 0005/188119 /CC5/HEG

			<u>'</u>	
		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

Connector	Phino Electric Co., Ltd	PHS 301	250V 10A	DIN EN 60320- 1(VDE 0625- 1):2008-05 EN 60320- 1:2001+ A1:2007 IEC 60320- 1(ed.2);am1	VDE Cert.: No :4003801 7 Report No.1528500- 1550- 0006/181627 /CC1/E
Plug	Phino Electric Co.,Ltd.	PHP-206	16A 250V	DIN VDE 0620-2- 1(VDE 0620-2- 1):2013-03	VDE Cert.: No :40013375 Report No.1528500- 1560- 0004/181600 /CC1/SHA
IC	SG Micro Corp	SGM2584AYN5 G/TR	Input Voltage Range: 2,5V to 5,5V Current Limit: 1100mA	IEC 60950- 1+A1+A2	CB Cert No.: DK-82510- UL
Protective Bonding Screw	Interchangeable	Interchangeable	Max. 4,0A; diameter min. 3,5mm	IEC62368-1:2018 EN IEC 62368- 1:2020+ A11:2020	Tested with equipment
Internal wire	Interchangeable	Interchangeable	wiring and cables insulated with PVC, TFE, PTFE, FEP, polychloroprene or polyimide or VW-1	UL 758	UL
Earth wire	XINGDA ELECTRONICS WIRE & CABLE CO LTD	1015	Min.18AWG, 80 °C, 300Vac	UL758	UL E187208

Supplementary information:

---End of Report---

<sup>1)</sup> Provided evidence ensures the agreed level of compliance. See OD-CB2039.

<sup>&</sup>lt;sup>2)</sup> Description line content is optional. Main line description needs to clearly detail the component used for testing

Details of: General view (Model: DS-D2046LU-Y)



Details of: General view (Model: DS-D2046LU-Y)



Details of: Terminal view (Model: DS-D2046LU-Y)



Details of: Internal view (Model: DS-D2046LU-Y)




Details of: Internal view (Model: DS-D2046LU-Y)



Details of: Internal view (Model: DS-D2046LU-Y)




Details of: Internal view (Model: DS-D2046LU-Y)

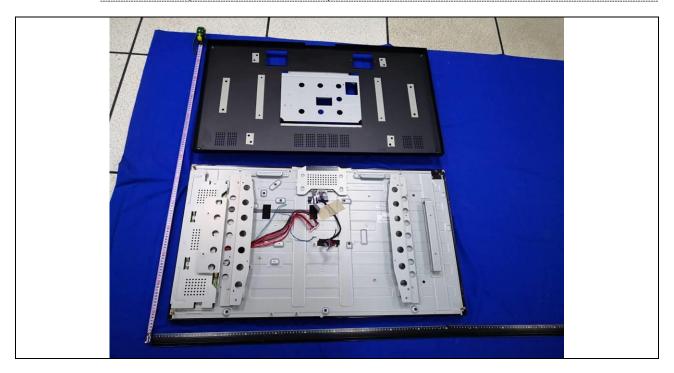

Details of: Internal view (Model: DS-D2046LU-Y)




Internal view (Model: DS-D2046LU-Y) Details of:

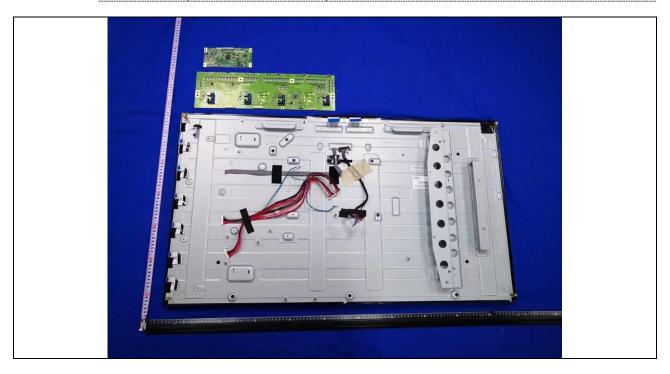

PCB-1 Details of:



PCB-1 Details of:

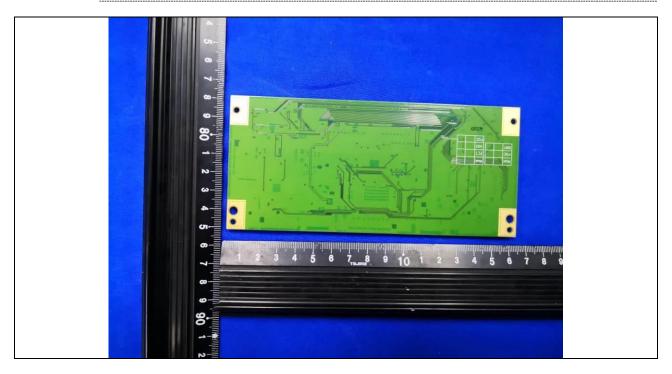


PCB-2 Details of:




Details of: PCB-2




Details of: Main board (model: 70245)

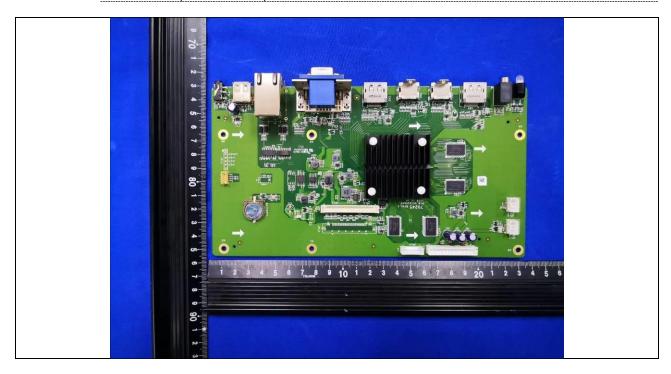


Details of: Main board (model: 70245)

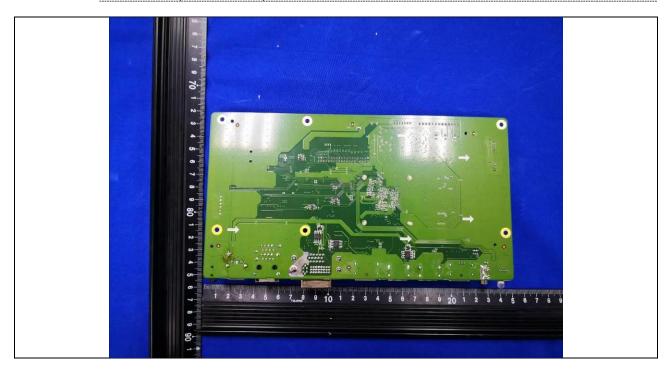


Details of: Building-in power supply (Model: MLT186FL)

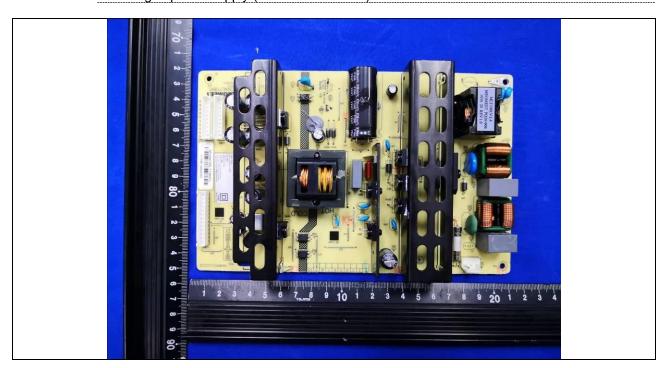


Details of: Building-in power supply (Model: MLT186FL)

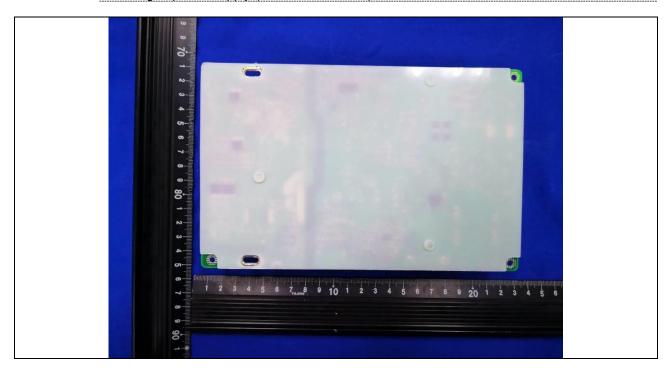


Details of: Building-in power supply (Model: MLT186FL)

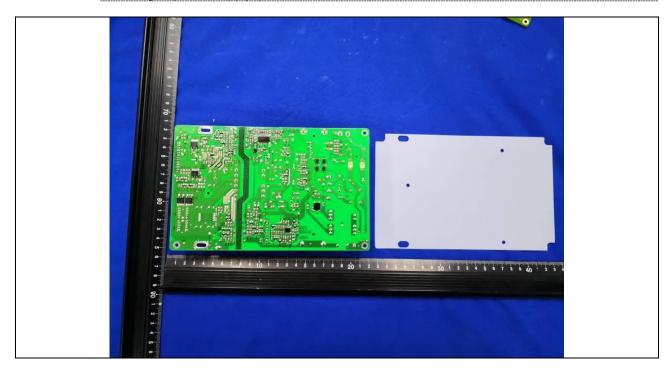


Details of: Building-in power supply (Model: MLT186FL)

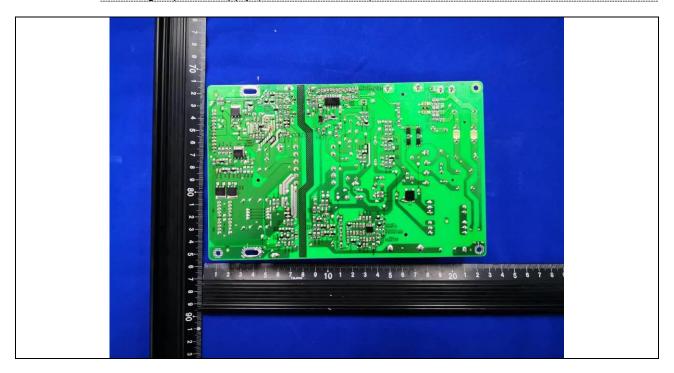

Details of: DC fan (Model: EFC-09D12M) two provided

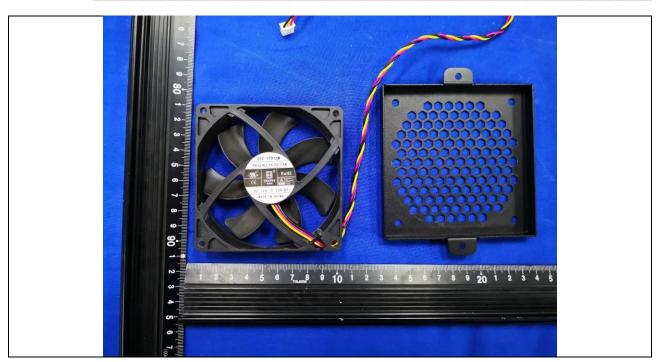

Details of: DC fan (Model: EFC-09D12M) two provided

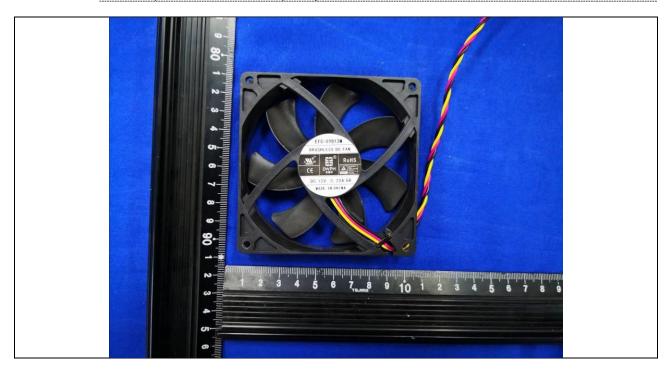


Details of: DC fan (Model: EFC-09D12M) two provided



Details of: Main board(Model: 70308)



Details of: Main board(Model: 70308)

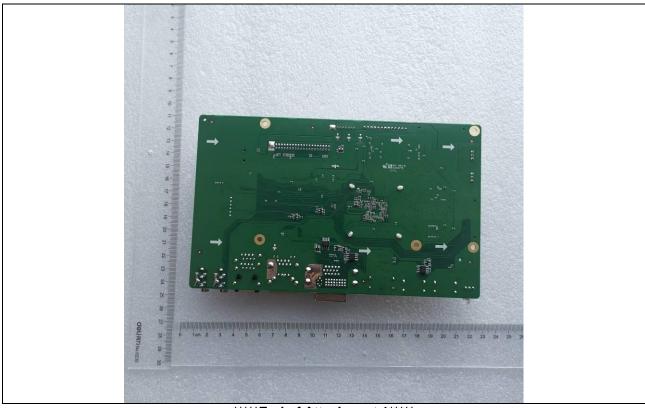

\*\*\*\*\*End of Attachment 1\*\*\*\*\*



Page 1 of 23 Report No.: SUES240300016701

		IEC62368_1E - ATTACHME	NT	
Clause	Requirement + Test		Result - Remark	Verdict

#### ATTACHMENT TO TEST REPORT

## IEC 62368-1

### EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES

(Audio/video, information and communication technology equipment - Part 1: Safety requirements)

**Differences according to** ...... EN IEC 62368-1:2020+A11:2020

Attachment Form No...... EU\_GD\_IEC62368\_1E

Attachment Originator.....: UL(Demko)

**Master Attachment** ...... 2021-02-04

Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

-			
	CENELEC COMMON MOD	DIFICATIONS (EN)	Р
	Clause numbers in the cells that are shaded light grey are clause references in EN IEC 62368-1:2020+A11:2020. All other clause numbers in that column, except for those in the paragraph below, refers to IEC 62368-1:2018.  Clauses, subclauses, notes, tables, figures and annexes which are additional to		
	those in IEC 62368-1:2018		
	Add the following annexes:		Р
	Annex ZA (normative)	Normative references to international publications with their corresponding European publications	
	Annex ZB (normative)	Special national conditions	
	Annex ZC (informative)	A-deviations	
	Annex ZD (informative)	IEC and CENELEC code designations for flexible cords	
1	Modification to Clause 3.		N/A
3.3.19	Sound exposure		N/A
	Replace 3.3.19 of IEC 6236	68-1 with the following definitions:	

Page 2 of 23 Report No.: SUES240300016701

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
3.3.19.1	momentary exposure level, MEL metric for estimating 1 s sound exposure level from the HD 483-1 S2 test signal applied to both channels, based on EN 50332-1:2013, 4.2.		N/A
	Note 1 to entry: MEL is measured as A-weighted levels in dB.  Note 2 to entry: See B.3 of EN 50332-3:2017 for additional information.		
3.3.19.3	sound exposure, <i>E</i>		N/A
	A-weighted sound pressure (p) squared and integrated over a stated period of time, T		
	Note 1 to entry: The SI unit is Pa $^2$ s. $E = \int p(t)^2 dt$		
	$L = \int_{0}^{\infty} P(t) dt$		
3.3.19.4	sound exposure level, SEL		N/A
	logarithmic measure of sound exposure relative to a reference value, <i>Eo</i> , typically the 1 kHz threshold of hearing in humans.		
	Note 1 to entry: SEL is measured as A-weighted levels in dB.		
	$SEL = 10 \lg \left(\frac{E}{E_0}\right) dB$		
	Note 2 to entry: See B.4 of EN 50332-3:2017 for additional information.		
3.3.19.5	digital signal level relative to full scale, dBFS		N/A
	levels reported in dBFS are always r.m.s. Full scale level, 0 dBFS, is the level of a dc-free 997-Hz sine wave whose undithered positive peak value is positive digital full scale, leaving the code corresponding to negative digital full scale unused		
	Note 1 to entry: It is invalid to use dBFS for non-r.m.s. levels. Because the definition of full scale is based on a sine wave, the level of signals with a crest factor lower than that of a sine wave may exceed 0 dBFS. In particular, square wave signals may reach +3,01 dBFS.		
2	Modification to Clause 10		N/A
10.6	Safeguards against acoustic energy sources Replace 10.6 of IEC 62368-1 with the following:		N/A
10.6.1.1	Introduction		N/A
	Safeguard requirements for protection against long-term exposure to excessive sound pressure levels from personal music players closely coupled		

JEO 20000 4	
IEC 62368-1	
Clause Requirement + Test Result - Remark	Verdict

to the ear are specified below. Requirements for earphones and headphones intended for use with personal music players are also covered. A personal music player is a portable equipment intended for use by an **ordinary person**, that:

- is designed to allow the user to listen to audio or audiovisual content / material; and
- uses a listening device, such as headphones or earphones that can be worn in or on or around the ears; and
- has a player that can be body worn (of a size suitable to be carried in a clothing pocket) and is intended for the user to walk around with while in continuous use (for example, on a street, in a subway, at an airport, etc.).

EXAMPLES Portable CD players, MP3 audio players, mobile phones with MP3 type features, PDAs or similar equipment.

Personal music players shall comply with the requirements of either 10.6.2 or 10.6.3.

NOTE 1 Protection against acoustic energy sources from telecom applications is referenced to ITU-T P.360.

NOTE 2 It is the intention of the Committee to allow the alternative methods for now, but to only use the dose measurement method as given in 10.6.5 in future. Therefore, manufacturers are encouraged to implement 10.6.5 as soon as possible.

Listening devices sold separately shall comply with the requirements of 10.6.6.

These requirements are valid for music or video mode only.

The requirements do not apply to:

professional equipment;

NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.

- hearing aid equipment and other devices for assistive listening;
- the following type of analogue personal music players:
- long distance radio receiver (for example, a multiband radio receiver or world band radio receiver, an AM radio receiver), and
- · cassette player/recorder;

NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.

 a player while connected to an external amplifier that does not allow the user to walk around Page 4 of 23 Report No.: SUES240300016701

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	•		
	while in use.		
	For equipment that is clearly designed or intended primarily for use by children, the limits of the relevant toy standards may apply.		
	The relevant requirements are given in EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.		
10.6.1.2	Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz		N/A
	The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz).  For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For handheld and body mounted devices, attention is drawn to EN 50360 and EN 50566.		
10.6.2	Classification of devices without the capacity to	estimate sound dose	N/A
10.6.2.1	General		N/A
	This standard is transitioning from short-term based (30 s) requirements to long-term based (40 hour) requirements. These clauses remain in effect only for devices that do not comply with sound dose estimation as stipulated in EN 50332-3. For classifying the acoustic output $L_{\text{Aeq}, \mathcal{T}}$ , measurements are based on the A-weighted equivalent sound pressure level over a 30 s period.		
	For music where the average sound pressure (long term $L_{Aeq}$ , $\tau$ ) measured over the duration of the song is lower than the average produced by the programme simulation noise, measurements may be done over the duration of the complete song. In this case, $T$ becomes the duration of the song.		
	NOTE Classical music, acoustic music and broadcast typically has an average sound pressure (long term $L_{Aeq,7}$ ) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the content and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song does not exceed the required limit. For example, if the player is set with the programme simulation noise to 85 dB, but the average music level of the song is only 65 dB, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dB.		
	RS1 limits (to be superseded, see 10.6.3.2)		N/A

Page 5 of 23 Report No.: SUES240300016701

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
	•		
10.6.2.3	RS1 is a class 1 acoustic energy source that does not exceed the following:  — for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the <i>L</i> Aeq, <i>τ</i> acoustic output shall be ≤ 85 dB when playing the fixed "programme simulation noise" described in EN 50332-1.  — for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 27 mV (analogue interface) or -25 dBFS (digital interface) when playing the fixed "programme simulation noise" described in EN 50332-1.  — The RS1 limits will be updated for all devices as per 10.6.3.2.  RS2 limits (to be superseded, see 10.6.3.3)		N/A
10.6.2.4	RS2 is a class 2 acoustic energy source that does not exceed the following:  — for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or when the combination of player and listening device is known by other means such as setting or automatic 130 detection, the LAeq, τ acoustic output shall be ≤ 100 dB(A) when playing the fixed "programme simulation noise" as described in EN 50332-1.  — for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 150 mV (analogue interface) or -10 dBFS (digital interface) when playing the fixed "programme simulation noise" as described in EN 50332-1.  RS3 limits		N/A
	exceeds RS2 limits.		
10.6.3	Classification of devices (new)		N/A
10.6.3.1	General  Previous limits (10.6.2) created abundant false negative and false positive PMP sound level warnings. New limits, compliant with The Commission Decision of 23 June 2009, are given below.		

Page 6 of 23 Report No.: SUES240300016701

Clause	Requirement + Test	Result - Remark	Verdict
10.6.3.2	RS1 limits (new)		N/A
	RS1 is a class 1 acoustic energy source that does not exceed the following:  — for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the <i>L</i> Aeq, <i>τ</i> acoustic output shall be ≤ 80 dB when playing the fixed "programme simulation noise" described in EN 50332-1.  — for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed "programme simulation noise" described in EN 50332-1.		IVA
10.6.3.3	RS2 limits (new)		N/A
10.6.4	RS2 is a class 2 acoustic energy source that does not exceed the following:  — for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the weekly sound exposure level, as described in EN 50332-3, shall be ≤ 80 dB when playing the fixed "programme simulation noise" described in EN 50332-1.  — for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output level, integrated over one week, as described in EN50332-3, shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed "programme simulation noise" described in EN50332-1.		N/A
	Requirements for maximum sound exposure	T	N/A
10.6.4.1	Measurement methods  All volume controls shall be turned to maximum during tests.  Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable.		N/A
10.6.4.2	Protection of persons  Except as given below, protection requirements for parts accessible to ordinary persons, instructed persons and skilled persons are given in 4.3.		N/A

IEC 62368-1

	Page 7 of 23	Repor	t No.: SUES2403	00016701
	IEC 62368-1			
Clause	Requirement + Test	Result	- Remark	Verdict
	NOTE 1 Volume control is not considered a <b>safeguard</b> .			
	Between RS2 and an <b>ordinary person</b> , the <b>basic safeguard</b> may be replaced by an <b>instructional safeguard</b> in accordance with Clause F.5, except that the <b>instructional safeguard</b> shall be placed on the equipment, or on the packaging, or in the instruction manual.  Alternatively, the <b>instructional safeguard</b> may be			
	given through the equipment display during use.			
	The elements of the <b>instructional safeguard</b> shall be as follows:	I		
	- element 1a: the symbol , IEC 60417-6044 (2011-01)			
	<ul> <li>– element 2: "High sound pressure" or equivalent wording</li> <li>– element 3: "Hearing damage risk" or equivalent wording</li> </ul>			
	<ul> <li>– element 4: "Do not listen at high volume levels follong periods." or equivalent wording</li> </ul>	r		
	An <b>equipment safeguard</b> shall prevent exposure of an <b>ordinary person</b> to an RS2 source without intentional physical action from the <b>ordinary person</b> and shall automatically return to an output level not exceeding what is specified for an RS1 source when the power is switched off.			
	The equipment shall provide a means to actively inform the user of the increased sound level when the equipment is operated with an output exceeding RS1. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an output exceeding RS1. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time.			
	NOTE 2 Examples of means include visual or audible signals. Action from the user is always needed.			
	NOTE 3 The 20 h listening time is the accumulative listening time, independent of how often and how long the personal music player has been switched off.			
	A <b>skilled person</b> shall not be unintentionally exposed to RS3.			
10.6.5	Requirements for dose-based systems			N/A
10.6.5.1	General requirements			N/A
	Personal music players shall give the warnings as provided below when tested according to EN 50332-3, using the limits from this clause.			

Page 8 of 23 Report No.: SUES240300016701

IEC 62368-1					
Clause	Requirement + Test	Result - Remark	Verdict		
	The manufacturer may offer optional settings to allow the users to modify when and how they wish to receive the notifications and warnings to promote a better user experience without defeating the safeguards. This allows the users to be informed in a method that best meets their physical capabilities and device usage needs. If such optional settings are offered, an administrator (for example, parental restrictions, business/educational administrators, etc.) shall be able to lock any optional settings into a specific configuration.				
	The personal music player shall be supplied with easy to understand explanation to the user of the dose management system, the risks involved, and how to use the system safely. The user shall be made aware that other sources may significantly contribute to their sound exposure, for example work, transportation, concerts, clubs, cinema, car races, etc.				
10.6.5.2	Dose-based warning and requirements		N/A		
	When a dose of 100 % <i>CSD</i> is reached, and at least at every 100 % further increase of <i>CSD</i> , the device shall warn the user and require an acknowledgement. In case the user does not acknowledge, the output level shall automatically decrease to compliance with class RS1.  The warning shall at least clearly indicate that listening above 100 % <i>CSD</i> leads to the risk of				
10.6.5.3	hearing damage or loss.  Exposure-based requirements		N/A		
	With only dose-based requirements, cause and effect could be far separated in time, defying the purpose of educating users about safe listening practice. In addition to dose-based requirements, a PMP shall therefore also put a limit to the short-term sound level a user can listen at.				
	The exposure-based limiter (EL) shall automatically reduce the sound level not to exceed 100 dB(A) or 150 mV integrated over the past 180 s, based on methodology defined in EN 50332-3.  The EL settling time (time from starting level reduction to reaching target output) shall be 10 s or faster.				
	Test of EL functionality is conducted according to EN 50332-3, using the limits from this clause. For equipment provided as a package (player with its listening device), the level integrated over 180 s shall be 100 dB or lower. For equipment provided				

Page 9 of 23 Report No.: SUES24030			00016701			
	IEC 62368-1					
Clause	Requirement + Test	Result - Remark	Verdict			
	•		•			
	with a standardized connector, the unweighted level integrated over 180 s shall be no more than 150 mV for an analogue interface and no more than -10 dBFS for a digital interface.					
	NOTE In case the source is known not to be music (or test signal), the EL may be disabled.					

Page 10 of 23 Report No.: SUES240300016701

IEC 62368-1

		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

10.6.6	Requirements for listening devices (headphones, earphones, etc.)		
10.6.6.1	Corded listening devices with analogue input	N/A	
	With 94 dB LAeq acoustic pressure output of the		
	listening device, and with the volume and sound		
	settings in the listening device (for example, built-in		
	volume level control, additional sound features like		
	equalization, etc.) set to the combination of		
	positions that maximize the measured acoustic output, the input voltage of the listening device		
	when playing the fixed "programme simulation		
	noise" as described in EN 50332-1 shall be ≥ 75		
	mV.		
	NOTE The values of 94 dB and 75 mV correspond with 85 dB and 27 mV or 100 dB and 150 mV.		
10.6.6.2	Corded listening devices with digital input	N/A	
	With any playing device playing the fixed		
	"programme simulation noise" described in EN		
	50332-1, and with the volume and sound settings in		
	the listening device (for example, built-in volume		
	level control, additional sound features like		
	equalization, etc.) set to the combination of		
	positions that maximize the measured acoustic output, the $L_{Aeq}$ , $\tau$ acoustic output of the listening		
	device shall be ≤ 100 dB with an input signal of -10		
	dBFS.		
10.6.6.3	Cordless listening devices	N/A	
	In cordless mode,		
	with any playing and transmitting device playing		
	the fixed programme simulation noise described in		
	EN 50332-1; and		
	<ul> <li>respecting the cordless transmission standards,</li> </ul>		
	where an air interface standard exists that specifies		
	the equivalent acoustic level; and  – with volume and sound settings in the receiving		
	device (for example, built-in volume level control,		
	additional sound features like equalization, etc.) set		
	to the combination of positions that maximize the		
	measured acoustic output for the above mentioned		
	programme simulation noise, the $L_{Aeq}$ , $ au$ acoustic		
	output of the listening device shall be ≤ 100 dB with		
10.6.6.4	an input signal of -10 dBFS.  Measurement method	N/A	
		. •// `	
	Measurements shall be made in accordance with EN 50332-2 as applicable.		
3	Modification to the whole document	N/A	

		Page 11 of 23	Report No.: SUES2403000167	01
		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

		0.2.1	Note 1 and 2	1	Note 4 and 5	3.3.8.1	Note 2	
		3.3.8.3	Note 1	4.1.15	Note	4.7.3	Note 1 and 2	
		5.2.2.2	Note	5.4.2.3.2.2 Table 12	Note c	5.4.2.3.2.4	Note 1 and 3	
		5.4.2.3.2.4 Table 13	Note 2	5.4.2.5	Note 2	5.4.5.1	Note	
		5.4.10.2.1	Note	5.4.10.2.2	Note	5.4.10.2.3	Note	
		5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3 and 4	
		5.6.8	Note 2	5.7.6	Note	5.7.7.1	Note 1 and Note 2	
		8.5.4.2.3	Note	10.2.1 Table 39	Note 3 and 4 and 5	10.5.3	Note 2	
		10.6.1	Note 3	F.3.3.6	Note 3	Y.4.1	Note	
		Y.4.5	Note					
4	IV	lodification	to Clause 1					N/A
		dd the follov						N/A

Page 12 of 23 Report No.: SUES240300016701

		rage 12 01 23	Report No.: 30E32403000107	UI
		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

5	Modification to 4.Z1	N/A
5 4.Z1	Modification to 4.Z1  Add the following new subclause after 4.9:  To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. mains, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):  a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment; b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation; c) it is permitted for pluggable equipment type B or permanently connected equipment, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.  If reliance is placed on protection in the building	N/A N/A
-	installation, the installation instructions shall so state, except that for <b>pluggable equipment type</b> A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.	
6	Modification to 5.4.2.3.2.4	N/A
5.4.2.3.2.4	Add the following to the end of this subclause:  The requirement for interconnection with external circuit is in addition given in EN 50491-3:2009.	N/A
7	Modification to 10.2.1	N/A
10.2.1	Add the following to c) and d) in table 39:  For additional requirements, see 10.5.1.	N/A

Page 13 of 23 Report No.: SUES240300016701

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict

8	Modification to 10.5.1	N/A
8 10.5.1	For RS 1 compliance is checked by measurement under the following conditions:  In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or pre-sets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made.  NOTE Z1 Soldered joints and paint lockings are examples of adequate locking.  The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus.  Moreover, the measurement shall be made under fault conditions causing an increase of the high voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made.	N/A N/A
	For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level.  NOTE Z2 These values appear in Directive 96/29/Euratom of 13	
9	May 1996.  Modification to G.7.1	N/A
G.7.1	Add the following note:  NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.	N/A

		Page 14 of 23	Report No.: SUES2403000167	01	
IEC 62368-1					
Clause	Requirement + Test		Result - Remark	Verdict	

10	Modification to Bibliography	N/A
	Add the following notes for the standards indicated:	
	IEC 60130-9 NOTE Harmonized as EN 60130-9.	
	IEC 60269-2 NOTE Harmonized as HD 60269-2.	
	IEC 60309-1 NOTE Harmonized as EN 60309-1.	
	IEC 60364 NOTE some parts harmonized in HD 384/HD 60364 seri	es.
	IEC 60601-2-4 NOTE Harmonized as EN 60601-2-4.	
	IEC 60664-5 NOTE Harmonized as EN 60664-5.	
	IEC 61032:1997 NOTE Harmonized as EN 61032:1998 (not modified).	
	IEC 61508-1 NOTE Harmonized as EN 61508-1.	
	IEC 61558-2-1 NOTE Harmonized as EN 61558-2-1.	
	IEC 61558-2-4 NOTE Harmonized as EN 61558-2-4.	
	IEC 61558-2-6 NOTE Harmonized as EN 61558-2-6.	
	IEC 61643-1 NOTE Harmonized as EN 61643-1.	
	IEC 61643-21 NOTE Harmonized as EN 61643-21.	
	IEC 61643-311 NOTE Harmonized as EN 61643-311.	
	IEC 61643-321 NOTE Harmonized as EN 61643-321.	
	IEC 61643-331 NOTE Harmonized as EN 61643-331.	
11	ADDITION OF ANNEXES	N/A
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)	N/A
4.1.15	Denmark, Finland, Norway and Sweden	N/A
	To the end of the subclause the following is	
	added:	
	Class I pluggable equipment type A intended	
	for connection to other equipment or a	
	network shall, if safety relies on connection to	
	reliable earthing or if surge suppressors	
	are connected between the network terminals	
	and accessible parts, have a marking stating	
	that the equipment shall be connected to an	
	earthed mains socket-outlet.	
	The marking text in the applicable countries shall	
	be as follows:	
	In <b>Denmark</b> : "Apparatets stikprop skal tilsluttes	
	en stikkontakt med jord som giver forbindelse til stikproppens jord."	
	In <b>Finland</b> : "Laite on liitettävä suojakoskettimilla	
	varustettuun pistorasiaan"	
	In <b>Norway</b> : "Apparatet må tilkoples jordet stikkontakt"	
	In <b>Sweden</b> : "Apparaten skall anslutas till jordat uttag"	

Page 15 of 23 Report No.: SUES240300016701

		raye 13 01 23	Nepoli No., 30L32403000 107	701		
	IEC 62368-1					
Clause	Requirement + Test		Result - Remark	Verdict		

472	United Kingdom	N1/A
4.7.3	Officea Kinguoni	N/A
	To the end of the subclause the following is added:	
	The terral test is performed using a cocket cutlet	
	The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be	
	assessed to the relevant clauses of BS 1363. Also	
	see Annex G.4.2 of this annex	
5.2.2.2	Denmark	N/A
	After the 2nd paragraph add the following:	
	A warning (marking safeguard) for high touch	
	current is required if the touch current exceeds the	
5.4.11.1	limits of 3,5 mA a.c. or 10 mA d.c.  Finland and Sweden	N/A
and	Filliand and Sweden	IN/A
Annex G	To the end of the subclause the following is added:	
	For separation of the telecommunication network from earth the following is applicable:	
	If this insulation is solid, including insulation forming part of a component, it shall at least	
	consist of either	
	two layers of thin sheet material, each of which shall pass the electric strength test below, or	
	one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below.	
	If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition	
	<ul> <li>passes the tests and inspection criteria of 5.4.8     with an electric strength test of 1,5 kV multiplied     by 1,6 (the electric strength test of 5.4.9 shall be     performed using 1,5 kV),</li> </ul>	
	and	
	is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5 kV.	
	It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.	

Page 16 of 23 Report No.: SUES240300016701

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
			•
	A capacitor classified Y3 according to EN 60384- 14:2005, may bridge this insulation under the following conditions:		
	<ul> <li>the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11;</li> </ul>		
	<ul> <li>the additional testing shall be performed on all the test specimens as described in EN 60384- 14;</li> </ul>		
	the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.		
5.5.2.1	Norway		N/A
	After the 3rd paragraph the following is added:		
	Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).		
5.5.6	Finland, Norway and Sweden		N/A
	To the end of the subclause the following is added:		
	Resistors used as <b>basic safeguard</b> or bridging <b>basic insulation</b> in <b>class I pluggable equipment type A</b> shall comply with G.10.1 and the test of G.10.2.		
5.6.1	Denmark		N/A
	Add to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket- outlets the protection for pluggable equipment type A shall be an integral part of the equipment.  Justification:		
	In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.		
5.6.4.2.1	Ireland and United Kingdom		N/A
	After the indent for <b>pluggable equipment type A</b> , the following is added:  — the <b>protective current rating</b> is taken to be 13 A, this being the largest rating of fuse used in the <b>mains</b> plug.		

Page 17 of 23 Report No.: SUES240300016701

	1 age 17 61 26	Report No.: OCEO2+000	0010701
	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
	•		•
5.6.4.2.1	France		N/A
	After the indent for <b>pluggable equipment type A</b> , the following is added:  — in certain cases, the <b>protective current rating</b> of the circuit supplied from the mains is taken as 20 A instead of 16 A.		
5.6.5.1	To the second paragraph the following is added:		N/A

 Page 18 of 23
 Report No.: SUES240300016701

 IEC 62368-1

 Clause
 Requirement + Test
 Result - Remark
 Verdict

5.7.6.2	Denmark	N/A
	To the end of the subclause the following is added: The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA.	
5.7.7.1	Norway and Sweden	N/A
	To the end of the subclause the following is added: The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building.  Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system.	
	It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example.	
	The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:	
	"Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing — and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)"	
	NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.	
	Translation to Norwegian (the Swedish text will also be accepted in Norway):	
	"Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV	

Page 19 of 23 Report No.: SUES240300016701

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	nettet."		
	Translation to Swedish:		
	"Apparater som är kopplad till skyddsjord via jordat		
	vägguttag och/eller via annan utrustning och		
	samtidigt är kopplad till kabel-TV nät kan i vissa fall		
	medfőra risk főr brand. Főr att undvika detta skall		
	vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och		
	kabel-TV nätet.".		
8.5.4.2.3	United Kingdom		N/A
	Add the fellow's refuse the Ord deals bullet's Ord		
	Add the following after the 2 <sup>nd</sup> dash bullet in 3 <sup>rd</sup> paragraph:		
	paragrapri.		
	An emergency stop system complying with the		
	requirements of IEC 60204-1 and ISO 13850 is		
	required where there is a risk of personal injury.		
B.3.1 and	Ireland and United Kingdom		N/A
B.4	The following is applicable:		
	The following is applicable.		
	To protect against excessive currents and short-		
	circuits in the primary circuit of direct plug-in		
	equipment, tests according to Annexes B.3.1 and		
	B.4 shall be conducted using an external miniature		
	circuit breaker complying with EN 60898-1, Type B,		
	rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included		
	as an integral part of the <b>direct plug-in</b>		
	equipment, until the requirements of Annexes		
	B.3.1 and B.4 are met		

Page 20 of 23 Report No.: SUES240300016701				′01
		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

G.4.2	Denmark	N/A
	To the end of the subclause the following is added:	
	Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.	
	CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.	
	If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a polyphase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.	
	Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.	
	Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.	
	Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a	
	Justification:	
	Heavy Current Regulations, Section 6c	
G.4.2	United Kingdom	N/A
	To the end of the subclause the following is added:	
	The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.	

Page 21 of 23 Report No.: SUES240300016701

	IEC 62368-1		
Clause	Requirement + Test	Result - Remark	Verdict
	•		
G.7.1	United Kingdom		N/A
	To the first paragraph the following is added:		
	Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc. (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations.		
	NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		
G.7.1	Ireland		N/A
	To the first paragraph the following is added:		
	Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard		
G.7.2	Ireland and United Kingdom		N/A
	To the first paragraph the following is added:		
	A power supply cord with a conductor of 1,25 mm <sup>2</sup> is allowed for equipment which is rated over 10 A and up to and including 13 A.		

Page 22 of 23 Report No.: SUES240300016701

		raye 22 01 23	Report No.: 30E32403000107	UI
		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

ZC ANNEX ZC, NATIONAL DEVIATIONS (EN)		
10.5.2	Germany	N/A
	The following requirement applies:	
	For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking.	
	Justification: German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM.	
	NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49-531-592-6320, Internet: http://www.ptb.de	

		Page 23 of 23	Report No.: SUES2403000167	<u>'01</u>
		IEC 62368-1		
Clause	Requirement + Test		Result - Remark	Verdict

 IEC and CENELEC CODE DESIGNATIONS F	OR FLEXIBLE O	CORDS (EN)	N
 Type of flexible cord Code design		signations	nations
	IEC	CENELEC	
PVC insulated cords			
Flat twin tinsel cord	60227 IEC 41	H03VH-Y	
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F	
Ordinary polyvinyl chloride sheathed flexible cord	60227 IEC 53	H05VV-F H05VVH2-F	
Rubber insulated cords			
Braided cord	60245 IEC 51	H03RT-F	
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F	
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F	
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F	
Cords having high flexibility	•		
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H	
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03 RV4-H	
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H	
Cords insulated and sheathed with halogen- free thermoplastic compounds			
Light halogen-free thermoplastic insulated and sheathed flexible cords		H03Z1Z1-F H03Z1Z1H2-F	
Ordinary halogen-free thermoplastic insulated and sheathed flexible cords		H05Z1Z1-F H05Z1Z1H2-F	

---End of Attachment 2---

Report No.: SUES240300016701

#### FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC compliance: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- · Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

#### **FCC Conditions**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- 2. This device must accept any interference received, including interference that may cause undesired operation.

## **EU Conformity Statement**



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European

standards listed under the EMC Directive 2014/30/EU, the RoHS Directive 2011/65/EU.



2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: <a href="http://www.recyclethis.info">http://www.recyclethis.info</a>.



2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: <a href="http://www.recyclethis.info">http://www.recyclethis.info</a>.

Report No.: SUES240300016701

# **Applicable Models**

This manual is applicable to the LCD displays.

# **Symbol Conventions**

The symbols that may be found in this document are defined as follows.

Symbol	Description
<u></u> Danger	Indicates a hazardous situation which, if not avoided, will or could result in death or serious injury.
<u></u> Caution	Indicates a potentially hazardous situation which, if not avoided, could result in equipment damage, data loss, performance degradation, or unexpected results.
<b>□i</b> Note	Provides additional information to emphasize or supplement important points of the main text.

# Safety Instructions



- In the use of the product, you must be in strict compliance with the electrical safety regulations
  of the nation and region.
- CAUTION: To reduce the risk of fire, replace only with the same type and rating of fuse.
- · The equipment must be connected to an earthed mains socket-outlet.
- An all-pole mains switch shall be incorporated in the electrical installation of the building.
- CAUTION: This equipment is for use only with Hikvision DS-DN series brackets. Use with other (carts, stands, or carriers) may result in instability causing injury.
- · Do not ingest battery. Chemical burn hazard!
- This product contains a coin/button cell battery. If the coin/button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- Keep new and used batteries away from children.
- If the battery compartment does not close securely, stop using the product and keep it away from children.
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

Report No.: SUES240300016701

- CAUTION: Risk of explosion if the battery is replaced by an incorrect type.
- Improper replacement of the battery with an incorrect type may defeat a safeguard (for example, in the case of some lithium battery types).
- Do not dispose of the battery into fire or a hot oven, or mechanically crush or cut the battery, which may result in an explosion.
- Do not leave the battery in an extremely high temperature surrounding environment, which may
  result in an explosion or the leakage of flammable liquid or gas.
- Do not subject the battery to extremely low air pressure, which may result in an explosion or the leakage of flammable liquid or gas.
- Dispose of used batteries according to the instructions.
- To reduce the risk of fire or electric shock, please do not expose the device to rain or humid environment.
- Electric discharge may last for a short period of time after the power is shut down. Please wait
  two minutes after the power is shut down before operating the device.
- To avoid the risk of electric shock, please do not operate when the power is on.
- To avoid the risk of fire or electric shock, please do not use overloaded AC power socket or extend the power cords.
- Inserting objects into vents or openings of the product is forbidden, as there exists high voltage
  and current in the product. Inserting objects will lead to electric shock or short circuit of internal
  parts. To avoid the risk of fire or electric shock, please keep water or other liquids away from LCD
  display, and please do not let objects such as paper clips or pins fall into the LCD display.





- The LCD display is designed in accordance with international standards. However, improper use
  can also lead to electric shock and fire, causing personal injury and property loss. In order to
  prevent potential hazards, ensure your safety and extend the service life of the product, please
  read and comply with the instructions carefully when installing, using and cleaning the product.
- The product instructions must be properly preserved for future reference.

Report No.: SUES240300016701

- Install the equipment according to the instructions in this manual.
- To prevent injury, this equipment must be securely attached to the bracket in accordance with the installation instructions.
- The equipment shall not be exposed to dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the equipment.
- · Ensure correct wiring of the terminals for connection to an AC mains supply.
- The equipment has been designed, when required, modified for connection to an IT power distribution system.
- tidentifies the battery holder itself and identifies the positioning of the cell(s) inside the battery holder.
- + identifies the positive terminal(s) of equipment which is used with, or generates direct current.
   identifies the negative terminal(s) of equipment which is used with, or generates direct current.
- No naked flame sources, such as lighted candles, should be placed on the equipment.
- The ventilation should not be impeded by covering the ventilation openings with items, such as newspapers, table-cloths, curtains, etc. The openings shall never be blocked by placing the equipment on a bed, sofa, rug or other similar surface.
- Keep a minimum 8 mm distance around the equipment for sufficient ventilation.
- The USB port of the equipment is used for connecting to a mouse, a keyboard, or a USB flash drive only.
- · Keep vertical when moving or using the equipment.
- Please put the device in a ventilated and dry place without strong vibration while working.
- Do not expose the product to humidity, rain, sand, sun or other places with high temperature for storage and usage.
  - Do not use parts recommended by non-manufacturer and inappropriate use of parts can lead to accidents.
  - Please do not plug and unplug the power cord frequently when the power is on.
  - Do not use the power cords of other devices. Replace with the power cords with the same specifications from regular channels only.
- · Please lay the power cord correctly to prevent from trampling or placing articles on it.
- Use standard 220 VAC power.
- Power consumption of the device depends on the type of product. When the device is not used for a long time, please turn off the power and unplug the power cords.
- If any of the following occurs, please unplug the power cords, and contact the service center.
  - The power cord or plug is damaged.
  - Liquid splashes on the product or an object falls into the product.
  - The product is exposed to rain or water.
  - The product is not properly operated according to the user manual. Do not adjust the control
    parts beyond the user manual. The inappropriate control of parts which are not described in
    the user manual will lead to the damage of the product, and will bring a lot of adjustment
    work to the technical personnel.
  - The product falls down or damages.
  - · The product runs abnormally.

Report No.: SUES240300016701

5 of 5

· When replacing the parts of the product, please ensure that maintenance personnel use the parts designated by the manufacturer or the parts with the same performance as the original parts, so as to avoid fire, electric shock or other damage caused by the use of unauthorized parts.

- · After completing service or maintenance, maintenance technicians are required to perform safety checks to ensure stable operation of the product.
- . When installing the product on walls or ceilings, ensure that the product is installed in compliance with the method recommended by the manufacturer.
- Please keep the product away from heat source, including radiators, heaters, stoves and other heating products.
- · Using the product in situations with fatal dangers such as death, injury and serious personal injury is forbidden.

\*\*\*\*\*End of attachment 3\*\*\*\*\*