

## DS-2CE56C5T-(A)VPIR3



### Key Features

- 1.27 Megapixel high-performance CMOS
- AnalogHD output, up to 720P resolution
- Low illumination
- 2.8 – 12mm vari-focal lens
- True Day/Night
- OSD menu, 3D DNR, Smart IR
- Up to 40m IR distance
- IP66 weatherproof & vandal proof
- UTC function(Pelco C protocol)
- 24V AC/ 12V DC (-A)

### Specification


Model	DS-2CE56C5T-(A)VPIR3
Parameter	Turbo HD720p Vandal Proof IR Dome Camera
Camera	
Image Sensor	1.27MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1305(H)*977(V)
Min. Illumination	0.001 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Speed	PAL: 1/25 s to 1/50,000 s NTSC: 1/30 s to 1/50,000 s
Lens	2.8-12mm @ F1.4

	Angle of view: 92° - 29.3°
Lens Mount	φ14
Angle Adjustment	Pan: 0 - 355°, Tilt: 0 - 75°, Rotation: 0 - 355°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75Ω/BNC)
S/N Ratio	> 62dB
<b>Menu</b>	
Automatic Exposure	Globe AE/DWDR
AGC	Low/Middle/High/Off
Slow Shutter	Support
White Balance	Auto/Manual
D/N Mode	Color/BW/SMART IR
3D DNR	Low/Middle/High/Off
Motion Detection	Support, maximum 4 zones
Privacy Mask	On/Off, maximum 8 zones
UTC Function	Support
Language	English/Chinese
Function	Digital Wide Dynamic Range, 3D Digital Noise Reduction, Sharpness, Brightness, Digital Zoom, Mirror, Reset
<b>General</b>	
Working Temperature/Humidity	-30 °C – 60 °C (-22 °F – 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC±15% -A: 12 VDC±15%, 24 VAC±15%
Power Consumption	Max. 4W -A: Max. 5W
Weather Proof Ratings	IP66
IR Range	Up to 40m
Impact Protection	IK10.
Communication	Up the coax Protocol: Pelco-C(CVBS output), HIKVISION-C(TVI output)
Dimensions	Φ 145.3 × 124.2 mm (Φ 5.72" × 4.89")
Weight	880 g (1.95 lbs)

## Order Model

DS-2CE56C5T-AVPIR3, DS-2CE56C5T-VPIR3

## Dimensions

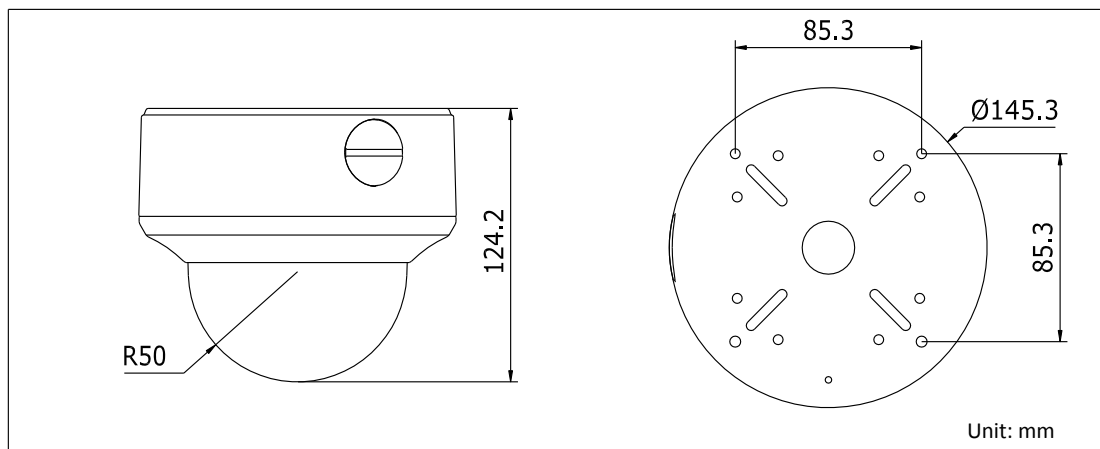

## Accessory



DS-1273ZJ-130  
Wall Mounting



DS-1275ZJ  
Vertical Pole Mounting



DS-1276ZJ  
Corner Mounting



DS-1271ZJ-130  
Pendant Mounting



DS-1273ZJ-130B  
Wall Mounting



DS-1241ZJ  
In-ceiling Mounting



DS-1240ZJ  
Inclined Ceiling Mounting



DS-1253ZJ-L  
Rain Shade



DS-1250ZJ  
Rain Shade



DS-1H18  
Video Balun



DS-TT-X41T  
TVI Tester