

DS-7216HGHI-K1(S) TURBO HD DVR

Key Feature

- H.265 Pro+/H.265 Pro/H.265 video compression
- HDTVI/AHD/CVI/CVBS/IP video input
- Audio via coaxial cable
- Up to 18-ch IP camera input (up to 5 MP)
- Max. 800 m for 1080p and 1200 m for 720p HDTVI signal transmission
- Up to 10 TB capacity per HDD















Compression and Recording

- H.265 Pro+ video compression improves encoding efficiency and reduces data storage costs
- Full channel recording at up to 1080p lite resolution

Storage and Playback

• Smart search for efficient playback

Smart Function

- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Support 1-ch line crossing detection and intrusion detection

Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 96 Mbps total bandwidth





Specification


Model	DS-7216HGHI-K1(S)		
Recording			
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264		
Encoding resolution	1080p lite/720p/VGA/WD1/4CIF/CIF		
Frame rate	Main stream: For 1080p stream access: 1080p lite/720p lite/WD1/4CIF/VGA@15fps; CIF@25fps (P)/30fps (N) For 720p stream access: 720p/WD1/4CIF/VGA@15fps; CIF@25fps (P)/30fps (N) For standard definition stream access: WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream:		
	For 1080p and 720p stream access: CIF/QVGA@15fps		
	For standard definition stream access: CIF/QVGA@25fps (P)/30fps (N)		
Video bit rate	32 Kbps to 4 Mbps		
Dual stream	Support		
Stream type	Video, Video & Audio		
Audio compression	G.711u		
Audio bit rate	64 Kbps		
Video and Audio	04 Kbps		
video and Addio	2-ch (up to 18-ch)		
IP video input	Up to 5 MP resolution		
ir video iliput	Support H.265+/H.265/H.264+/H.264 IP cameras		
	16-ch		
Analog video input	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection		
HDTVI input	1080p25, 1080p30, 720p25, 720p30		
AHD input	1080p25, 1080p30, 720p25, 720p30 1080p25, 1080p30, 720p25, 720p30		
HDCVI input	1080p25, 1080p30, 720p25, 720p30 1080p25, 1080p30, 720p25, 720p30		
CVBS input	PAL/NTSC		
HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
Audio input	1-ch, 1920 × 1080/60H2, 1280 × 1024/60H2, 1280 × 720/60H2, 1024 × 768/60H2 1-ch RCA (2.0 Vp-p, 1 KΩ), and 16-ch via coaxial cable		
•			
Audio output	1-ch, RCA (Linear, 1 KΩ)		
Two-way audio Synchronous playback	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input) 16-ch		
Network	10-CII		
	120		
Remote connections	TCD/ID DDDGE DUCD Hill Connect DNS DDNS NTD SADD NES ISSSELLEDDDIM		
Network protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF		
Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface		
Auxiliary interface			
SATA	1, SATA interface		
Capacity	Up to 10 TB capacity for each disk		
USB interface	2 × USB 2.0		
General			
Power supply	12 VDC, 1.6 A		



Consumption (without HDD)	≤ 10 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimension (W × D × H)	260 × 222 × 45 mm (10.2 × 8.7 × 1.8 inch)
Weight (without HDD)	≤ 1.1 kg (2.4 lb)



Physical Interface

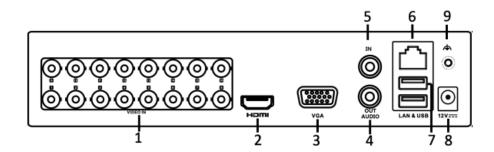

No.	Description	No.	Description
1	Video and Audio in	6	LAN Network Interface
2	HDMI Interface	7	USB Interface
3	VGA Interface	8	12 VDC Power Input
4	AUDIO OUT	9	GND
5	AUDIO IN		

Available Model

DS-7216HGHI-K1(S)

biotributed by	
Г	_

HIKVISION°

Headquarters

Dietributed by

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thalland T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 [216]521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK 8 Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33[0]1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T+7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-{0}31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T+62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com

04301001090926