

## DS-KV8X02-IM Metal Villa Door Station



### Key Features

#### Basic Functions

- Video intercom function
- Access control function
- Issues cards via door station, up to Max. 256 cards (This function will be invalid if the card has been issued via the client.)
- Card readers supported
- Self-adaptive IR supplement
- High-Performance Embedded SOC Processor
- One-touch calling function

#### Video/Audio Functions

- HD video surveillance
- Noise suppression and echo cancellation
- H.264 video compression
- Low illumination

#### Remote Control

- Remote reboot, remote upgrade, time synchronization via NTP, and batch configuration function
- Remote unlocking via the client or the app
- Remotely answering the call via the client or the app

#### Additional Features


- Tampering alarm and door magnetic alarm
- Message notification function
- Auto-uploads captured pictures to FTP or the client while unlocking the door



## Specifications

Model		DS-KV8102-IM	DS-KV8202-IM	DS-KV8402-IM
System parameters	Processor	High-Performance Embedded SOC Processor		
	Operation system	Embedded Linux Operation System		
Video parameters	Camera	CMOS Low Illumination 1.3 MP HD Colorful Camera		
	Video compression standard	H.264		
	Resolution	1280 × 720		
	Video frame rate	25 fps		
Audio parameters	Audio input	Built-in Omnidirectional Microphone		
	Audio output	Built-in Loudspeaker		
	Audio compression standard	G.711 U		
	Audio compression rate	64 Kbps		
	Audio quality	Noise Suppression and Echo Cancellation		
Access control parameters	Internal card reader	Built-in IC Card Reader		
	Exit button	Exit Button for Opening the Door		
	Door magnetic detection	Detects Door Magnetic Status		
Light supplement	Light supplement mode	IR Supplement		
Network parameters	Ethernet	10/100 Mbps Self-Adaptive Ethernet		
	Network protocol	TCP/IP, RTSP		
Alarm parameters	Alarm input	Door Magnetic Alarm, Tampering Alarm		
Device interfaces	Network interface	1 RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface		
	RS-485	1 RS-485 Half-Duplex Port		
	I/O input	4		
	I/O output	1		
General	Indoor station access amount	1	2	4
	Material	Aluminum Alloy		
	Power supply	24 VDC, Power Over Network Cable (DS-KAD606, DS-KAD612)		
		12 VDC		
	Power consumption	≤12 W		
	Working temperature	-40° C to +60° C (-40° F to 140° F)		
	Working humidity	10% to 90%		
	IP protection level	IP65		
	Dimensions (L × W × H)	182 mm × 100 mm × 33 mm (7.17" × 3.94" × 1.30")		
Certification	FCC, IC, CE, C-TICK, ROHS, REACH, WEEE			


## Typical Application

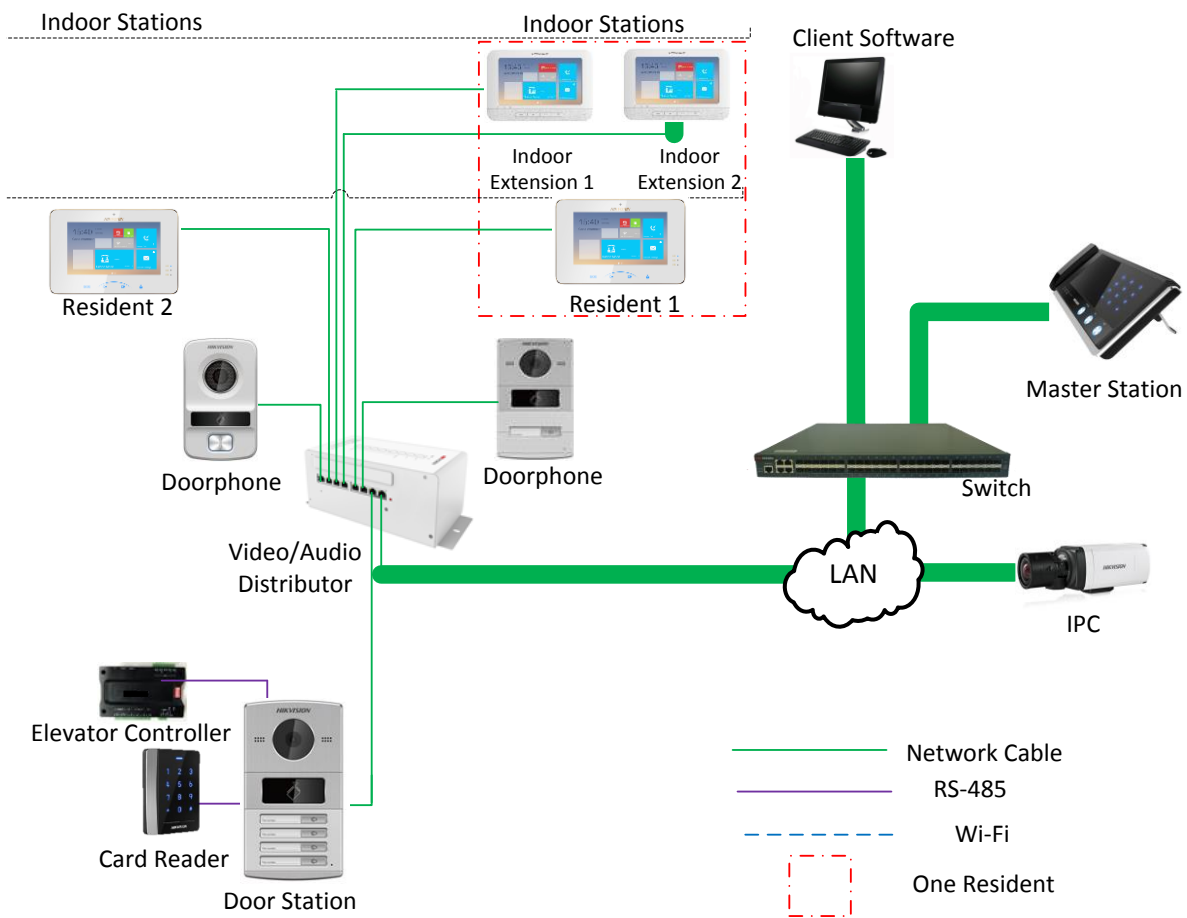

## Available Models

DS-KV8102-IM, DS-KV8202-IM, DS-KV8402-IM

## Appearance and Interfaces

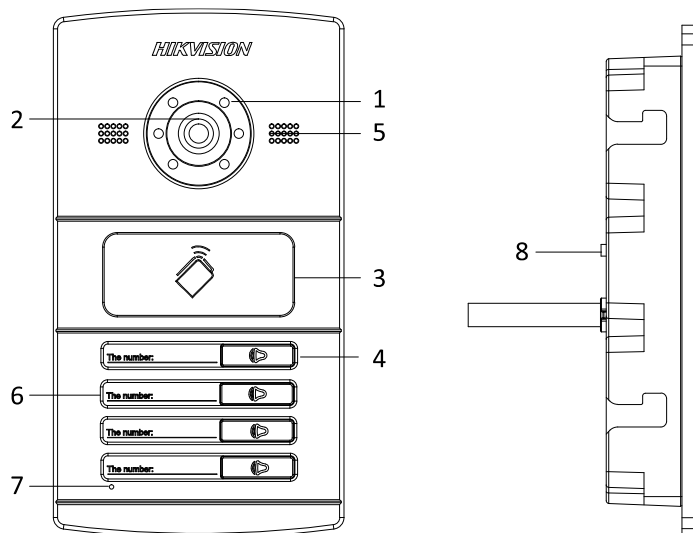

Index	Description	Index	Description
1	Low Illumination Supplement Light	5	Loudspeaker
2	Built-in Camera	6	Room No. (Customized)
3	Card Induction Area	7	Microphone
4	Call Button	8	TAMPER

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761